




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

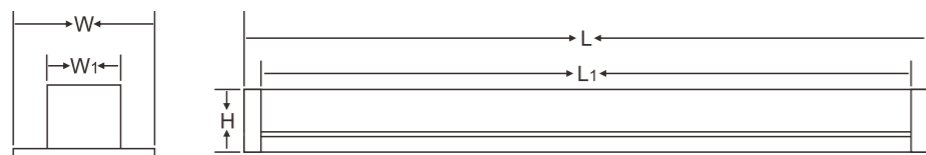

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
CIP-LED210-RPC	20W	599x86x66	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
CIP-LED20-RPC	20W	1209x86x66						
CIP-LED220-RPC	40W	1209x86x66						
CIP-LED224-RPC	48W	1209x86x66						
CIP-LED230-RPC	60W	1495x86x66						
CIP-LED230-RPC	60W	1820x86x66						
CIP-LED240-RPC	80W	1820x86x66						
CIP-LED240-RPC	80W	2390x86x66						
CIP-LED248-RPC	96W	2390x86x66						
CIP-LED260-RPC	120W	2390x86x66						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- 5 years warranty
- 100-277V/120-347V/220-240V 50-60Hz
- Easy maintenance
- CRI > 83, CRI > 90

OPTIONS:

- 2FT/3FT/4FT/5FT/6FT/8FT
- CCT 3000K/4000K/5000K/6500K
- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
CIP-LED210-RPC(2S)	20W	578x63x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
CIP-LED20-RPC(2S)	20W	1188x63x65						
CIP-LED220-RPC(2S)	40W	1188x63x65						
CIP-LED224-RPC(2S)	48W	1188x63x65						
CIP-LED230-RPC(2S)	60W	1474x63x65						
CIP-LED230-RPC(2S)	60W	1799x63x65						
CIP-LED240-RPC(2S)	80W	1799x63x65						
CIP-LED240-RPC(2S)	80W	2369x63x65						
CIP-LED248-RPC(2S)	96W	2369x63x65						
CIP-LED260-RPC(2S)	120W	2369x63x65						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- USB socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
CIP-LED210-RPC(2W)	20W	578x63x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
CIP-LED20-RPC(2W)	20W	1188x63x65						
CIP-LED220-RPC(2W)	40W	1188x63x65						
CIP-LED224-RPC(2W)	48W	1188x63x65						
CIP-LED230-RPC(2W)	60W	1474x63x65						
CIP-LED230-RPC(2W)	60W	1799x63x65						
CIP-LED240-RPC(2W)	80W	1799x63x65						
CIP-LED240-RPC(2W)	80W	2369x63x65						
CIP-LED248-RPC(2W)	96W	2369x63x65						
CIP-LED260-RPC(2W)	120W	2369x63x65						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
CIP-LED210-RPC(2)	20W	578x63x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
CIP-LED20-RPC(2)	40W	1188x63x65						
CIP-LED220-RPC(2)	40W	1188x63x65						
CIP-LED224-RPC(2)	48W	1188x63x65						
CIP-LED230-RPC(2)	60W	1474x63x65						
CIP-LED230-RPC(2)	60W	1799x63x65						
CIP-LED240-RPC(2)	80W	1799x63x65						
CIP-LED240-RPC(2)	80W	2369x63x65						
CIP-LED248-RPC(2)	96W	2369x63x65						
CIP-LED260-RPC(2)	120W	2369x63x65						