


CCT Adjustable

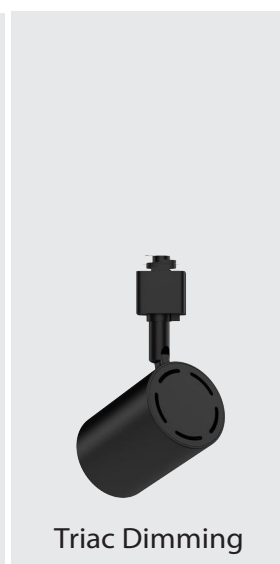

Triac Dimming

Main Features:

- COB LED chips, no shadow, strong penetrability, high fidelity CRI 83/97 and high efficacy up to 110lm/W.
- Triac dimming, smooth range from 100% to 10%, and compatible with most dimmers, such as Lutron, Leviton, Smart Home, Arctic Lighting etc.
- UL certified driver, no flicker, high PF 0.98, instant start, noise free.
- Can point almost anywhere with 350 degree rotation and 90 degree pivot.
- Unique integrated built-in driver design, invisible wires, anti-glare.
- Compatible track systems: Halo, Juno, Lightolier, Liteline and Global optional.
- 3CCT adjustable (3000K, 4000K, 5000K) / 5CCT adjustable (2700K, 3000K, 3500K, 4000K, 5000K) optional.
- Finished color: Black, White and Silver grey optional.

Model No.	Size	Power	Voltage	Luminous Flux	CCT Optional	CRI	Beam Angle	Dimming
CIP-TRB8W	φ55xL93xH140mm φ2.17"xL3.66"xH5.5"	8W	AC120V	880lm 720lm	2700K/3000K/4000K/5000K 3CCT/5CCT adjustable	83Ra/97Ra 93Ra	15°/25°/36°/55°	Triac
CIP-TRB10W	φ67xL110xH150mm φ2.64"xL4.33"xH5.91"	10W	AC120V	1100lm 900lm	2700K/3000K/4000K/5000K 3CCT/5CCT adjustable	83Ra/97Ra 93Ra	15°/25°/36°/55°	Triac
CIP-TRB12W	φ67xL110xH150mm φ2.64"xL4.33"xH5.91"	12W	AC120V	1320lm 1080lm	2700K/3000K/4000K/5000K 3CCT/5CCT adjustable	83Ra/97Ra 93Ra	15°/25°/36°/55°	Triac
CIP-TRB15W	φ67xL127xH150mm φ2.64"xL5"xH5.91"	15W	AC120V AC100-277V	1650lm 1350lm	2700K/3000K/4000K/5000K 5CCT adjustable	83Ra/97Ra 93Ra	15°/25°/36°/55°	Triac 0-10V

Remark: Single CCT Luminous flux is based on 3000K, 83Ra, 36°.
3CCT, 5CCT Luminous flux is based on 3000K, 93Ra, 36°.

Applications:

- Clothing/Shoe/Furniture/Jewelry stores
- Supermarkets
- Hotels/ Restaurant
- Auto shops
- Museum/Gallery

