


FABIEN

Track Head

An H-type track head available in three higher-output wattages from 20W to 30W, with beam angles from 12° to 60° based on wattage. An integrated driver maintains a clean profile with no visible wiring, while 350° rotation and a 90° pivot provide flexible aiming. Available with fixed CCT at Ra83, Ra90, or Ra97, or field-selectable CCT at Ra93.

- Three wattages — 20W, 25W and 30W, delivering 1,800 to 3,300 lumens
- Fixed beam chosen at order — 12°, 24°, 36° or 60° on the 25W and 30W; 15°, 25°, 36° or 60° on the 20W
- Four fixed CCTs 2700K–5000K at Ra83, Ra90 or Ra97, or a field-selectable build at Ra93
- COB LED source · efficacy to 110 lm/W · power factor 0.98
- TRIAC dimming, smooth 100% to 10%, compatible with most dimmers
- 350° rotation and 90° pivot · integral driver, no visible wiring
- Fits Halo, Juno, Lightolier, Liteline and Global H-type track
- Black, white or silver grey

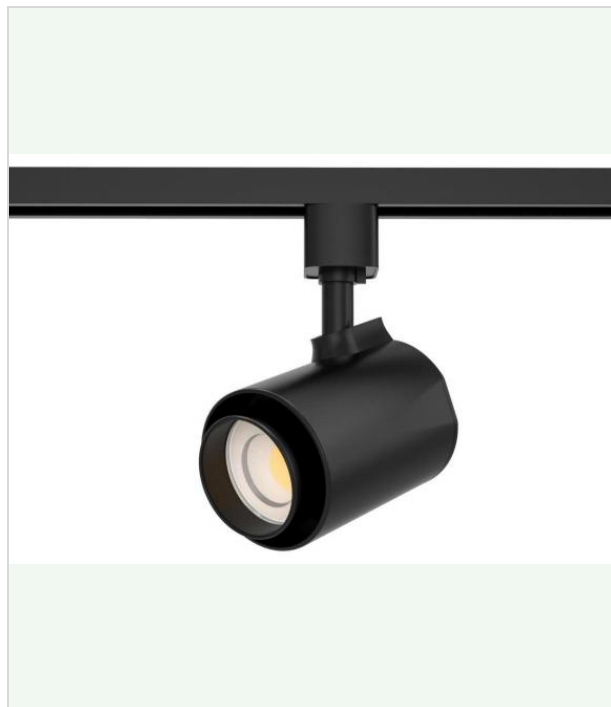

cETLus

FCC



LUMEN OUTPUT	1,800 – 3,300 lm delivered
EFFICACY	up to 110 lm/W
COLOR TEMP / CCT	2700 / 3000 / 4000 / 5000K · 3CCT (3000/4000/5000K) · 5CCT (2700/3000/3500/4000/5000K)
CRI	83 / 90 / 97 (Ra) with fixed CCT · 93 (Ra) with selectable CCT
DISTRIBUTION	12° / 15° / 24° / 25° / 36° / 60°
LED SOURCE	COB
WATTAGE	20 / 25 / 30W
VOLTAGE	120V

POWER FACTOR	0.98
DIMMING	TRIAC
DRIVER	Integral, built into the head
FINISH	White, Black, Silver Grey
MOUNTING	H-type track — Halo, Juno, Lightolier, Liteline or Global
DIMENSIONS	3.27" – 3.74" ø · 4.53" – 5.24" long · 6.57" – 7.09" high
WARRANTY	5-Year

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	WATTAGE	BEAM	VOLTAGE	CCT	CRI	CONTROLS	FINISH
FABIEN	20 20W	15 15° 25 25° 36 36° 60 60°	AC120 120V	27 2700K 30 3000K 40 4000K 50 5000K 3CCT (3000/4000/5000K) 5CCT (2700/3000/3500/ 4000/5000K)	83 Ra83 90 Ra90 97 Ra97 93 Ra93*	TR TRIAC	WH White BK Black SGY Silver Grey
	25 25W 30 30W	12 12° 24 24° 36 36° 60 60°					

* Ra93 requires a field-selectable 3CCT or 5CCT build; fixed CCT is offered in Ra83, Ra90 or Ra97 only.


Build Your Order Code — example values shown in grey

MODEL	WATTAGE	BEAM	VOLTAGE	CCT	CRI	CONTROLS	FINISH
FABIEN	25	36	AC120	3CCT	93	TR	BK

STANDARD FINISHES



WH
White



BK
Black



SGY
Silver Grey

DIMENSIONS

WATTAGE	BODY Ø	LENGTH	HEIGHT
20 20W	3.27" (83 mm)	4.53" (115 mm)	6.57" (167 mm)
25 25W	3.74" (95 mm)	5.24" (133 mm)	7.09" (180 mm)
30 30W	3.74" (95 mm)	5.24" (133 mm)	7.09" (180 mm)

PERFORMANCE DATA

DELIVERED LUMENS

WATTAGE	FIXED CCT • RA83	3CCT / 5CCT • RA93
20W	2,200 lm	1,800 lm
25W	2,750 lm	2,250 lm
30W	3,300 lm	2,700 lm

Measured at 3000K on the 36° beam. Fixed-CCT figures are at Ra83; the field-selectable figures are at Ra93. Power factor 0.98.

Distribution 12° / 15° / 24° / 25° / 36° / 60° **Efficacy** up to 110 lm/W **IES File** On request