

EMIL

Mini LED Wall Pack

A compact semi cut-off (forward throw) wall pack from 15W to 90W, for gas stations, parking areas, shopping centres, warehouses and yards. Ordered at a fixed wattage and colour temperature, with an optional daylight sensor.

- 15 / 25 / 50 / 70 / 90W · 1,950 – 11,500 lm · up to 130 lm/W
- Semi cut-off forward throw · 104.7° average beam
- CCT ordered as 3000K, 4000K, 5000K or 6000K
- Daylight sensor and BLE Mesh options
- ADC12 die-cast aluminium · IP65 · 50,000 hr rated life



UL

DLC

CE

IP65

LUMEN OUTPUT	1,950 – 11,500 lm
EFFICACY	Up to 130 lm/W
COLOR TEMP / CCT	3000K / 4000K / 5000K / 6000K
CRI	70+ (Ra)
DISTRIBUTION	Semi cut-off (forward throw) · 104.7° avg
LED SOURCE	Philips SMD 3030 (or equivalent)
WATTAGE	15 / 25 / 50 / 70 / 90W
VOLTAGE	100–277V · 120–347V · 180–480V
POWER FACTOR	≥0.95 · THD <20%

DRIVER	Meanwell / SOSEN (or equivalent)
FINISH	Dark Bronze, Black, Gray, White
OPERATING TEMP	–40°C to 45°C (–40°F to 113°F)
IP / IMPACT	IP65
MATERIAL	Aluminium alloy · PC optic lens
DIMENSIONS	7.71 × 6.53 × 5.83" (15–50W) · 10.71 × 8.40 × 8.78" (70/90W)
LIFETIME	50,000 hrs
WARRANTY	5-Year Limited

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.




● **In stock** — all other configurations built to order.

MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	FINISH
EMIL	● 15 15W ● 25 25W ● 50 50W 70 70W ● 90 90W	● U 100-277V M 120-347V H 180-480V	30 3000K 40 4000K ● 50 5000K 60 6000K	● N None DS Daylight Sensor BT BLE Mesh	● DBZ Dark Bronze BK Black GY Gray WH White

Build Your Order Code — example values shown in grey

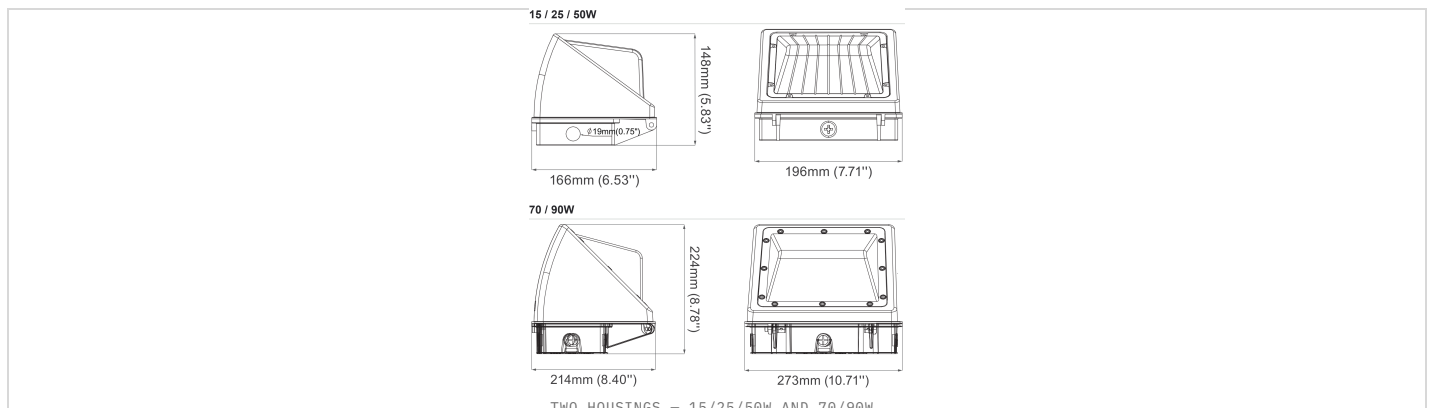
MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	FINISH
EMIL	25	U	50	N	DBZ

STANDARD FINISHES

DBZ
Dark BronzeBK
BlackGY
GrayWH
White

DIMENSIONS & WEIGHT

WATTAGE	DIMENSIONS (W × D × H)	NET WEIGHT
15 / 25 / 50W	7.71 × 6.53 × 5.83" (196 × 166 × 148 mm)	3.75 lbs (1.7 kg)
70 / 90W	10.71 × 8.40 × 8.78" (273 × 214 × 224 mm)	9.48 lbs (4.3 kg)

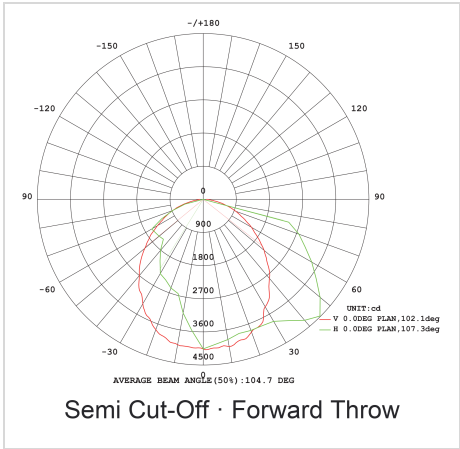


OPTIONS

CONTROLS

DS	Daylight sensor
BT	BLE Mesh
N	None

PHOTOMETRY



DELIVERED LUMENS

Beam	CCT	15W	25W	50W	70W	90W
Semi cut-off	Nominal	1,950	3,100	6,200	9,100	11,500

Nominal delivered lumens per the OEM data sheet.

DISTRIBUTION Semi cut-off (forward throw) · 104.7° avg **EFFICACY** Up to 130 lm/W **IES FILE** Available on request