



Specifications

part # CIP-WL196-(wattage)-(CCT color)-(AC input)-(options)-(Finish)

Note: We try to keep stock in: 15/25/50/90W, 5000K, no sensor, AC100-277V, Bronze

Wattage	15W / 25W / 50W / 70W / 90W
Power Factor	≥0.95
LED Chip (optional)	SMD 3030, Philips or other LED chip
Driver Brand	Meanwell / SOSEN/ Other Brand
CCT	3000K / 4000K / 5000K / 6000K / 3CCT Switch
Lumen	1950LM / 3100LM / 6200LM / 9100LM / 11500LM
AC Input Voltage	100-277V / 120-347V / 180-480V
Exclusive Feature (optional)	CCT & Power selectable
Material	Aluminum alloy + PC optic lens
Housing color	Dark Bronze / Black / Gray / White
Ambient Temperature	-40°C ~ 45°C (-40°F ~ 113°F)
Total Harmonic Distortion	<20%
Lifetime	50,000H
IP Rating	IP65
Warranty	5 years

Features

CIP
LIGHTING




CCT Select



Power Select



BLE Mesh




Daylight sensor



ADC12 Die casting

Semi Cut Off (Forward Throw)


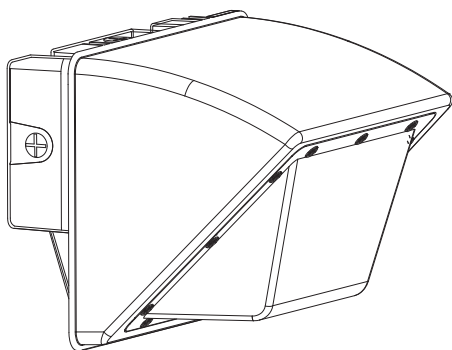


Sensor (Daylight sensor available)



Daylight Sensor

Fine heat sink design, fine heat dissipation

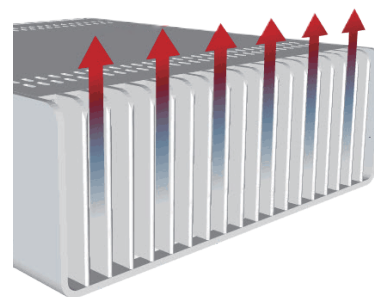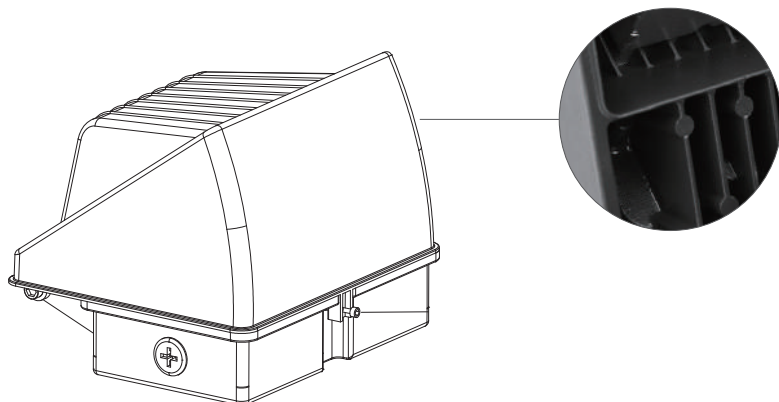



Gas station



Back Yard



Parking Area




Shopping center




Warehouse



Light Distribution

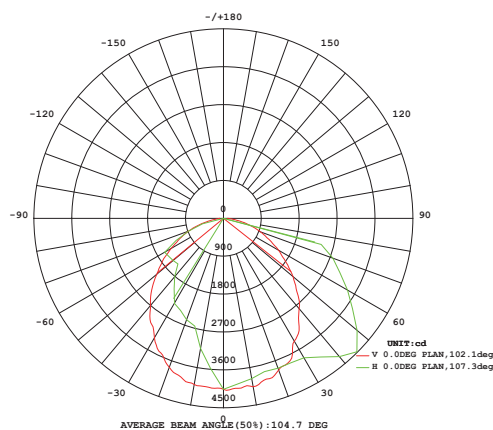


Dimension (Size)



WL196





WL268




Installation


1. Remove M3x12mm locking screw with 3mm allen wrench on fixture to open the fixture

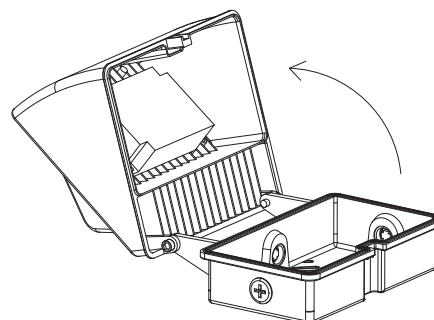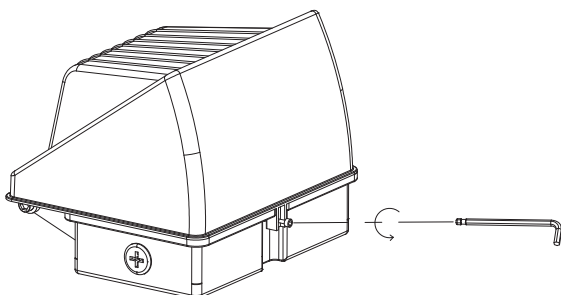


2. Remove the cover of EVA gasket, put the EVA gasket onto the back of the wall pack housing tightly.

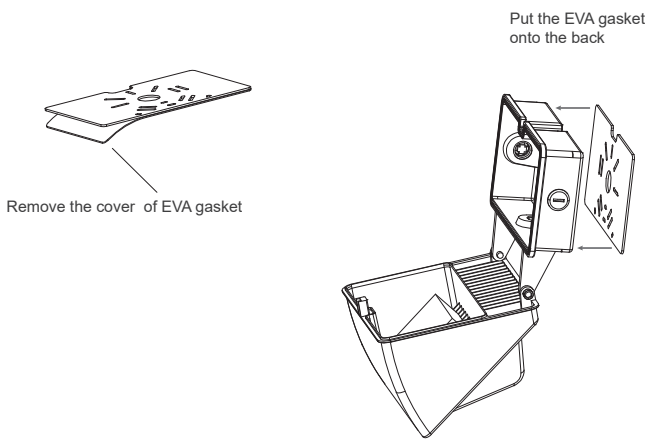

3. Remove Knockout Plug and attach conduit.

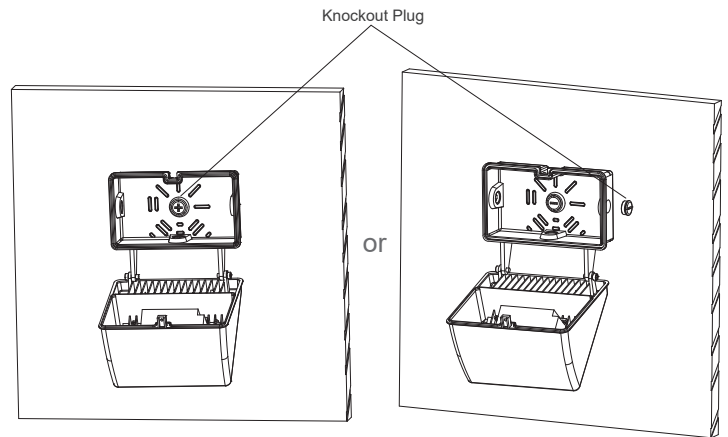


4. Drill 2 holes (0.125 inch) through fixture, and 2 holes into mounting surface using drill template. Drive wall anchors into holes. Attach the fixture to wall with using 2 screws (not included).

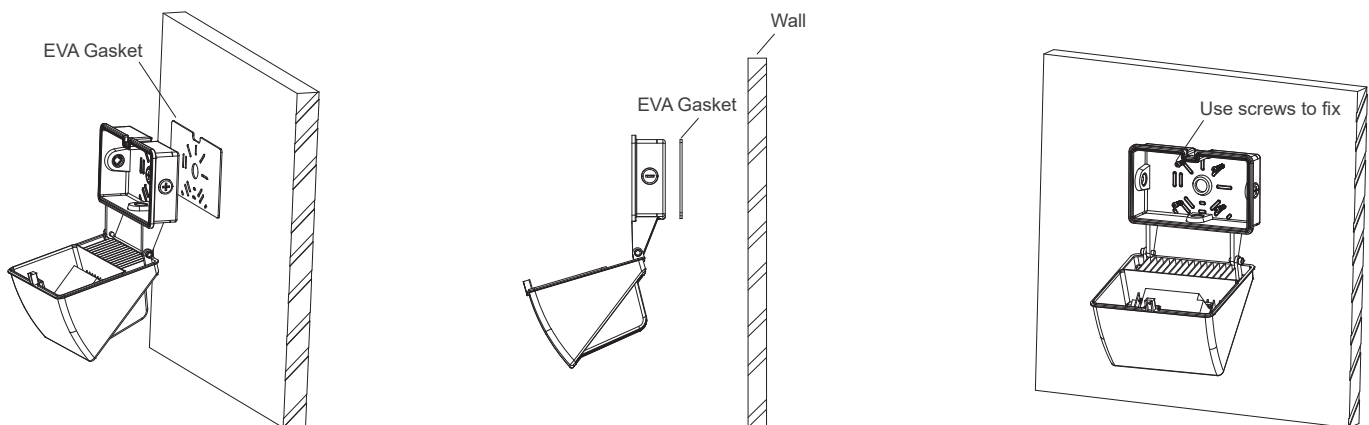

5. Pull wires from conduit through knockout and make wire connections to main supply. Black to Line, White to Neutral, and Green to Ground. Consult an electrician and install according to national, local, and state codes.


6. Close hatch and tighten M3x12mm locking screw with 3mm allen wrench.

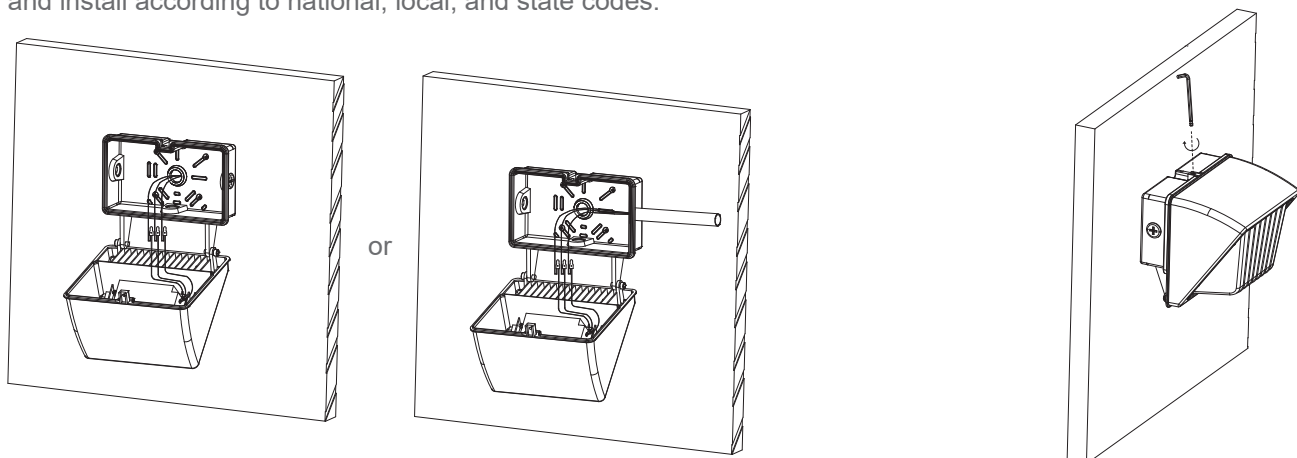


Packaging information

Wattage	Product Dimension (mm/in)	Carton Box Dimension	N.W (Kg/lb)	G.W (Kg/lb)	QTY / CTN
15W	196 × 166 × 148mm 7.71 × 6.53 × 5.83 in	260 × 230 × 220mm 10.24 × 9.06 × 8.66 in	1.7Kg(3.75lb)	2.2kg(4.85lb)	1 PCS
25W	196 × 166 × 148mm 7.71 × 6.53 × 5.83 in	260 × 230 × 220mm 10.24 × 9.06 × 8.66 in	1.7Kg(3.75lb)	2.2kg(4.85lb)	1 PCS
50W	196 × 166 × 148mm 7.71 × 6.53 × 5.83 in	260 × 230 × 220mm 10.24 × 9.06 × 8.66 in	1.7Kg(3.75lb)	2.2kg(4.85lb)	1 PCS
70W	273 × 214 × 224mm 10.71 × 8.40 × 8.78 in	350 × 330 × 310mm 13.78 × 12.99 × 12.20 in	4.3Kg(9.48lb)	5.0kg(11.02lb)	1 PCS
90W	273 × 214 × 224mm 10.71 × 8.40 × 8.78 in	350 × 330 × 310mm 13.78 × 12.99 × 12.20 in	4.3Kg(9.48lb)	5.0kg(11.02lb)	1 PCS

Protection

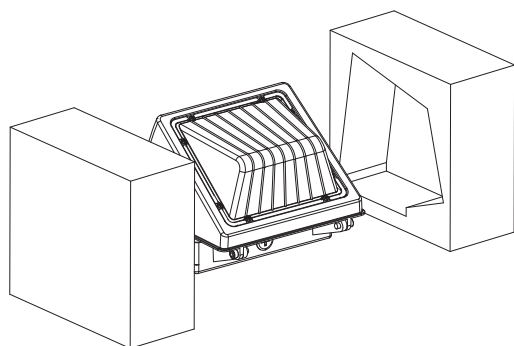

Package

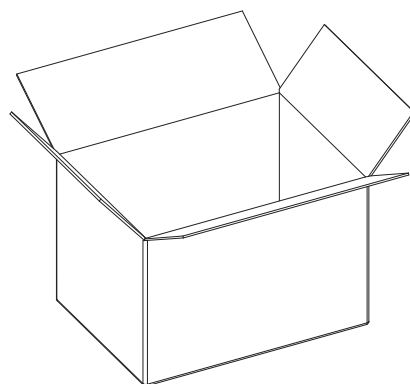

1 PCS



CIP Lighting

803-766-0243

info@ciplighting.com

www.ciplighting.com