



ARCO 354


Arch Linear Light

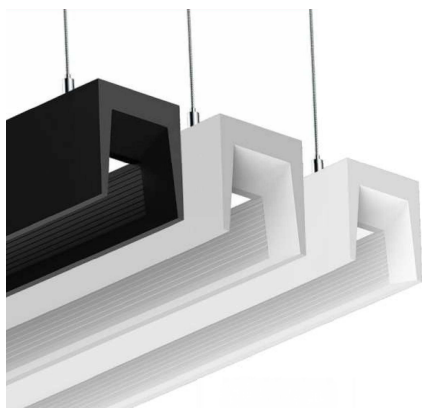

Linkable



Section



Pendant Mount

- 4.72" (120 mm) overall width
- 2.63" (67 mm) inner height
- 2.48" (63 mm) inner width
- 3.54" (90 mm) body depth

SPECIFICATIONS

Switch Select
2,400 – 8,000 Lumens

CCT Select
3000K / 3500K / 4000K

Wattage Select
30 – 100 Watts



ETL Listed — Intertek
5 year warranty

FEATURES


SINGLE-SIDED LIGHT OUTPUT VERSION




Light from the top only, providing focused and clean lighting.

FLEXIBLE DESIGN — CUSTOMIZABLE SIDE PANELS

Aluminum panels for the single-sided version, available in multiple finishes and colors.



INTERNAL WATT & CCT SELECTABLE

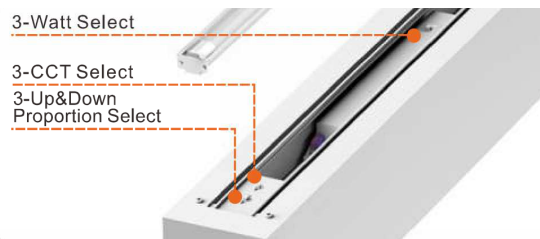

- 3-watt select
- 3-CCT select
- 3 up & down proportion select

Custom colors available on request

ORDERING INFORMATION

MODEL	SIZE	WATTS SELECT	LUMENS	EFFICACY	CCT SELECT	VOLTAGE	DIMMING	CRI	FLICKER
ARC-20LSUD4FT50WA2D1HV(XXK-XXK-XXK)-YY	4FT	30W / 40W / 50W	2400 / 3200 / 4000 Lm	80 Lm/W	3000/3500/4000K	AC120-277V	0-10V (1%-100%)	>90	<5%
ARC-20LSUD8FT100WA2D1HV(XXK-XXK-XXK)-YY	8FT	60W / 80W / 100W	4800 / 6400 / 8000 Lm	80 Lm/W	3000/3500/4000K	AC120-277V	0-10V (1%-100%)	>90	<5%
ARC-20LSUD4FT50WA3D1HV(XXK-XXK-XXK)-YY	4FT	30W / 40W / 50W	2400 / 3200 / 4000 Lm	80 Lm/W	3000/3500/4000K	AC120-277V	0-10V (1%-100%)	>90	<5%
ARC-20LSUD8FT100WA3D1HV(XXK-XXK-XXK)-YY	8FT	60W / 80W / 100W	4800 / 6400 / 8000 Lm	80 Lm/W	3000/3500/4000K	AC120-277V	0-10V (1%-100%)	>90	<5%