


GTG9203A: LED FOUNTAIN LIGHT



INTRODUCTION

FEATURE

Advanced Patent LED Technology
 Durable Corrosion Resistant Structure
 Long Lifespan >50,000hours
 Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
 Driver Brand: GUBO
 Housing: Die-casted SUS304
 Optics: High Efficiency PC Lens
 Diffuser: Clear Tempered Glass Diffuser
 Pre-wired: 0.5meters 2C18AWG Power Cord

INSTALLATION

[FSC] Pole Fixing Slip Fitter
 Maximum Diving Depth: 3meters/10feets
 Suitable for Pool, Fountain.....

STANDARD

Designed and Manufactured to Comply with
 CE/RoHS/CB/cETL/SAASASO Standard
 IP68 and IK10 Protection, Class III Electric

CUSTOM OPTION

LED CCT: 1,800K~10,000K/R/G/B/Y
 [CRI]: RA80, [G] RA90, [H] RA97

NOTE

Cannot Be Operated for Over 10min Out of Water!



DIMMING	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CUSTOM DIMMING	INPUT [V]
GTG9203A-MCA150A3C	6W	6x10W SMD3535	G2700K	RA90	410	>0.9	[Symmetric] BL6D:6° BL10D:10° BL15D:15° BL25D:25° BL30D:30° BL45D:45° BL60D:60° BL60D:90° BL120D:120° [Oval] BLV15x45° BLV15x60° BLV30x70° [BDF] BDF:120° [BGL] LOUVER LM-20%	[CDP]: PWM(1%) [CDX]: DMX512(1%)	CV DC24V [CV DC12V]
			G3000K	RA90	420				
			G4000K	RA90	440				
			G6500K	RA90	430				
			2C@6W	TWG	G2700K G6500K				
3C@6W	RGB	620nm 520nm 460nm	/	390	>0.9				
4C@6W	RGBW	620nm 520nm 460nm 2700K	/	390	>0.9				
GTG9203A-MCA170A3C	9W [6W]	9x10W SMD3535	G2700K	RA90	610	>0.9			
			G3000K	RA90	630				
			G4000K	RA90	660				
			G6500K	RA90	650				
			2C@9W	TWG	G2700K G6500K		RA90	580	>0.9
3C@9W	RGB	620nm 520nm 460nm	/	580	>0.9				
4C@9W	RGBW	620nm 520nm 460nm 2700K	/	580	>0.9				
GTG9203A-MCA180A3C	12W [6W]	12x10W SMD3535	G2700K	RA90	810	>0.9			
			G3000K	RA90	840				
			G4000K	RA90	880				
			G6500K	RA90	870				
			2C@12W	TWG	G2700K G6500K		RA90	770	>0.9
3C@12W	RGB	620nm 520nm 460nm	/	770	>0.9				
4C@12W	RGBW	620nm 520nm 460nm 2700K	/	770	>0.9				
GTG9203A-MCA210A3C	15W	15x10W SMD3535	G2700K	RA90	1000	>0.9			
			G3000K	RA90	1050				
			G4000K	RA90	1100				
			G6500K	RA90	1090				
			2C@15W	TWG	G2700K G6500K		RA90	970	>0.9
3C@15W	RGB	620nm 520nm 460nm	/	970	>0.9				
4C@15W	RGBW	620nm 520nm 460nm 2700K	/	970	>0.9				
GTG9203A-MCA230A3C	18W [12W]	18x10W SMD3535	G2700K	RA90	1210	>0.9			
			G3000K	RA90	1260				
			G4000K	RA90	1330				
			G6500K	RA90	1310				
			2C@18W	TWG	G2700K G6500K		RA90	1160	>0.9
3C@18W	RGB	620nm 520nm 460nm	/	1160	>0.9				
4C@18W	RGBW	620nm 520nm 460nm 2700K	/	1160	>0.9				
GTG9203A-MCA250A3C	24W [18W] [12W]	18x10W SMD3535	G2700K	RA90	1610	>0.9			
			G3000K	RA90	1680				
			G4000K	RA90	1760				
			G6500K	RA90	1740				
			2C@24W	TWG	G2700K G6500K		RA90	1550	>0.9
3C@24W	RGB	620nm 520nm 460nm	/	1550	>0.9				
4C@24W	RGBW	620nm 520nm 460nm 2700K	/	1550	>0.9				
GTG9203A-MCA300A3C	48W [36W] [24W]	48x10W SMD3535	G2700K	RA90	3220	>0.9			
			G3000K	RA90	3350				
			G4000K	RA90	3530				
			G6500K	RA90	3480				
			2C@48W	TWG	G2700K G6500K		RA90	3090	>0.9
3C@48W	RGB	620nm 520nm 460nm	/	3090	>0.9				
4C@48W	RGBW	620nm 520nm 460nm 2700K	/	3090	>0.9				
GTG9203A-MCA380A3C	72W [60W] [48W]	60x10W SMD3535	G2700K	RA90	4830	>0.9			
			G3000K	RA90	5020				
			G4000K	RA90	5300				
			G6500K	RA90	5220				
			2C@72W	TWG	G2700K G6500K		RA90	4640	>0.9
3C@72W	RGB	620nm 520nm 460nm	/	4640	>0.9				
4C@72W	RGBW	620nm 520nm 460nm 2700K	/	4640	>0.9				

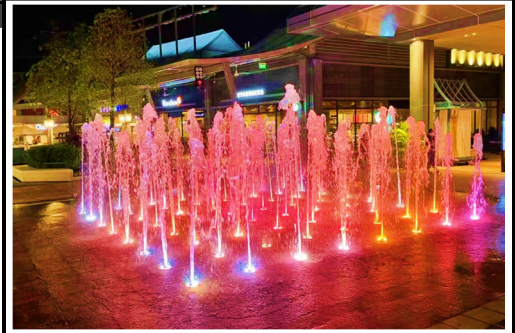
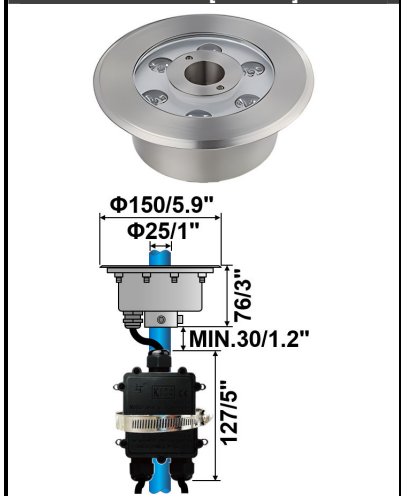
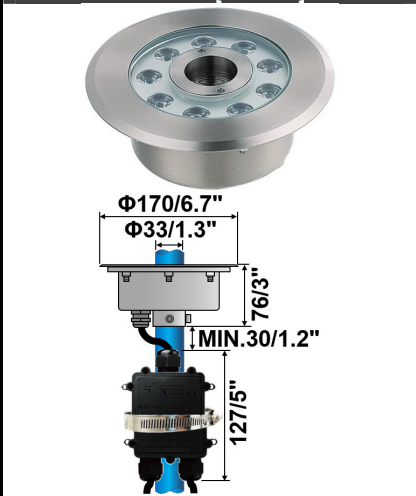
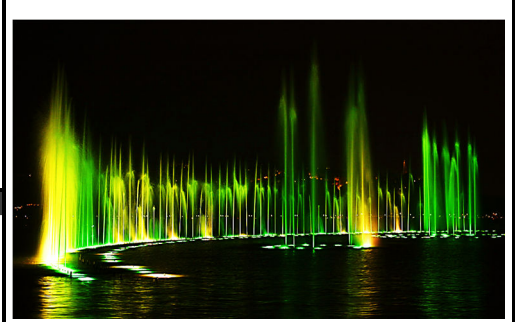

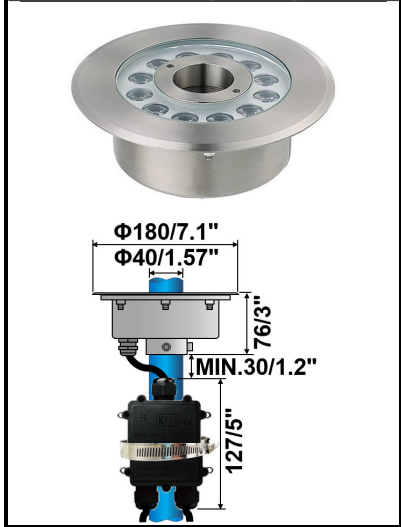
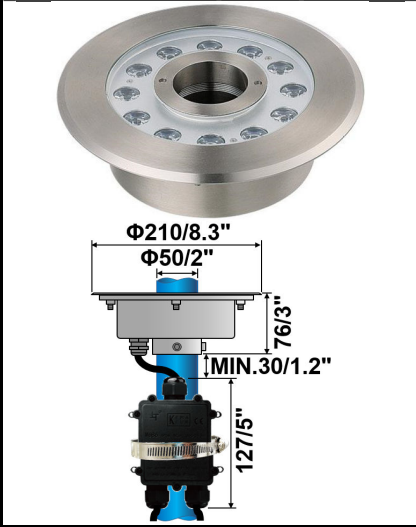
NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

[FSC] Pole Mounted Slip Fitter

DIMENSION: [UNIT: MM]

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.

MCA150A-[FSC25A]	MCA170A-[FSC33A]				
					
MCA180A-[FSC40A]	MCA210A-[FSC50A]				
					
MCA230A-[FSC60A]	MCA250A-[FSC76A]	MCA300A-[FSC76A]	MCA380A-[FSC76A]		
