
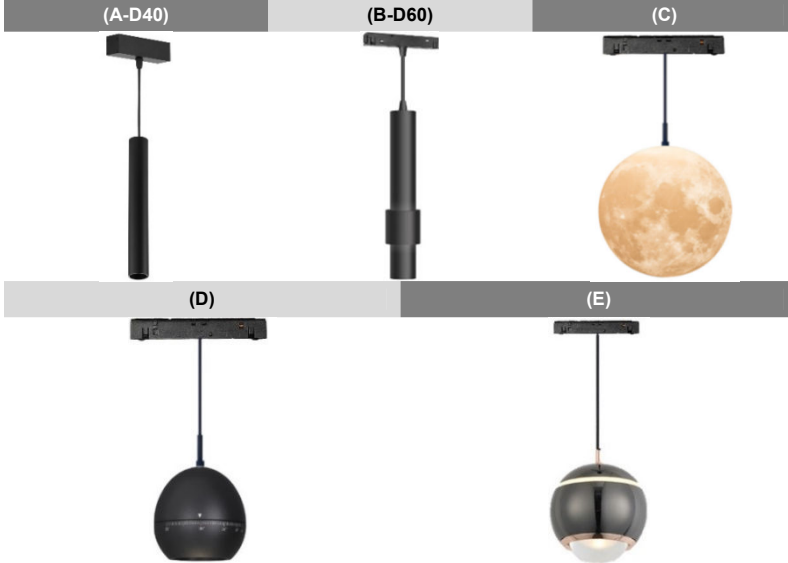


W20 MAGNETIC TRACK LED PENDANT LIGHT



INTRODUCTION

FEATURE

- Anti-glare Uniform Lighting UGR≤16
- Long Lifespan Design >50,000Hours
- Working Temperature: -20°C~40°C

MAIN MATERIAL

- LED BRAND: GUBO
- LED Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Optics: High Efficiency PMMA Lens

INSTALLATION

- W20 Magnetic Track Slotted
- Suitable for Interior Lighting

STANDARD

- Designed and Manufactured to Comply with CE/RoHS/EMF/TUV/SAA/Erp/cETL/FCC
- IP20 Protection, Class III Electric


OPTION

- LED CCT: 1,800K~10,000K/R/G/B/Y
- [CRI]: Ra80, [G] Ra90, [H] RA97
- Custom Housing Finished Color:


Custom Housing Finished Color:

MATT WHITE	MATT BLACK
[HMWT]	[HMBK]

DIMENSION: [UNIT: MM]

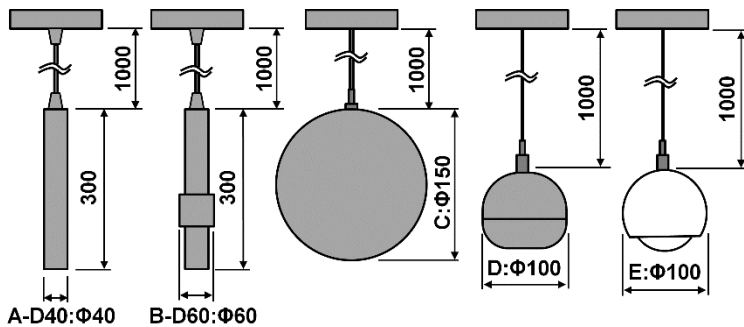

CASE STUDY:

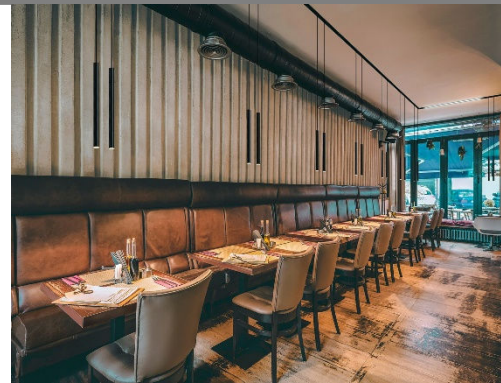

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	REMOTE CONTROL	INPUT [V]
GTR4425A-D40 GTR4425B-D60	10W	CXM-6 COB	G2700K	RA90	800	>0.5	BL24D: 24°		
			G3000K	RA90	900				
			G3500K	RA90	900				
			G4000K	RA90	950				
			G5000K	RA90	950				
			H2700K	RA97	650				
			H3000K	RA97	700				
			H3500K	RA97	700				
			H4000K	RA97	750				
			G2700K, G6000K	RA90	650				
GTR4425C	7W	CXM-6 COB	G2700K	RA90	300	>0.5	360°	[CDP]:PWM(1%)	DC24V [DC48V]
			G3000K	RA90	330				
			G3500K	RA90	330				
			G4000K	RA90	350				
			G5000K	RA90	350				
			H2700K	RA97	280				
			H3000K	RA97	300				
			H3500K	RA97	300				
			H4000K	RA97	350				
			G2700K, G6000K	RA90	280				
GTR4425D	15W	CXM-6 COB	G2700K	RA90	1030	>0.5	[ZOOM] 15°~60°	[CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDZ]:ZIGBEE(1%) [CRF]:2.4GRF(1%)	[REMOTE DRIVER] AC220~240V [AC100~240V] [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	1080				
			G3500K	RA90	1080				
			G4000K	RA90	1120				
			G5000K	RA90	1120				
			H2700K	RA97	930				
			H3000K	RA97	970				
			H3500K	RA97	970				
			H4000K	RA97	1050				
			G2700K, G6000K	RA90	800				
GTR4425E	7W	CXM-6 COB	G2700K	RA90	550	>0.5	120°		
			G3000K	RA90	580				
			G3500K	RA90	580				
			G4000K	RA90	600				
			G5000K	RA90	600				
			H2700K	RA97	480				
			H3000K	RA97	500				
			H3500K	RA97	500				
			H4000K	RA97	550				
			G2700K, G6000K	RA90	380				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±3.