


RENZO

Emergency / Exit Combo

A combination exit sign and emergency light with field-selectable red or green lettering and two adjustable LED heads. An integrated nickel-metal-hydride battery provides 90 minutes of emergency operation. A remote-capable version features a larger battery for powering additional remote heads.

- Field-selectable red or green LED letters — 6 LEDs per unit
- Two adjustable LED emergency heads
- 180 lumens output at 6500K
- 120 / 277VAC dual voltage operation — 2.0W, or 2.8W remote capable
- Integral 3.6V nickel-metal-hydride battery, 90 minutes emergency operation
- Self-diagnostic option carries automatic self-testing
- Remote capacity option carries a larger battery to drive additional remote heads
- Maximum 24 hours for full recharge time
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Universal J-box mounting · damp location rated



LUMEN OUTPUT	180 lm
COLOR TEMP / CCT	6500K
LED SOURCE	6 × LED — field-selectable red / green · 2 emergency heads
WATTAGE	2.0W · 2.8W remote capable
VOLTAGE	120 / 277V AC dual voltage
BATTERY	3.6V nickel-metal-hydride — 1000mAh (N / SD) · 2000mAh (RC)
EMERGENCY RUNTIME	90 minutes

RECHARGE TIME	24 hours maximum
FINISH	White
MATERIAL	Injection-molded thermoplastic ABS housing · UL 94V-0 flame rating
MOUNTING	Universal J-box mounting
DIMENSIONS	16.40" W × 7.20" H × 2.00" D
WARRANTY	5-Year electrical parts & housing

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	FACE	LETTER	REMOTE CAPACITY	OPTIONS	FINISH
RENZO	1S Single Sided	2COL (Red / Green)	N None	N None SD Self-Diagnostic	WH White
			RC Remote capable	N None	

Build Your Order Code — example values shown in grey

MODEL	FACE	LETTER	REMOTE CAPACITY	OPTIONS	FINISH
RENZO	1S	2COL	N	N	WH

DIMENSIONS

MODEL	WIDTH	HEIGHT	DEPTH
RENZO	16.40" (417 mm)	7.20" (183 mm)	2.00" (51 mm)

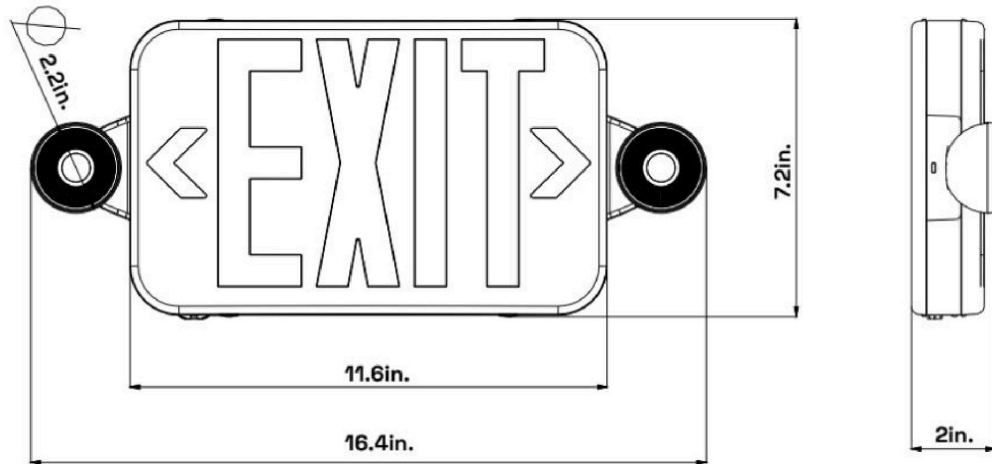

RENZO EMERGENCY / EXIT COMBO — FRONT AND SIDE ELEVATION. SIGN BODY 11.60" WIDE; EACH HEAD Ø2.20".

ELECTRICAL & EMERGENCY PERFORMANCE

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED SOURCE	RECHARGE	EMERGENCY RUNTIME
RENZO-1S-2COL-N-N-WH	120 / 277V	0.032 – 0.017A	2.0W	6 × LED + 2 heads	24 hrs	90 min
RENZO-1S-2COL-N-SD-WH	120 / 277V	0.047 – 0.028A	2.0W	6 × LED + 2 heads	24 hrs	90 min
RENZO-1S-2COL-RC-N-WH	120 / 277V	0.047 – 0.028A	2.8W	6 × LED + 2 heads	24 hrs	90 min

Values as published by the manufacturer. Contact CIP for custom configurations.