Rune

Wall Step Light

A hooded LED step light — a solid eyelid sweeps over a louvered half-aperture, cutting all upward glare and shielding the lens from rain. The deepest trim on the platform, and the only one that reads as a fixture rather than a flush plate. Round or square, 6.3″, surface mounted on a wall, ceiling or 4″ J-box.

- Hooded face — a solid eyelid over a louvered half-aperture, zero upward glare
- Round or square, 6.3″ (160 mm) face
- 6W · up to 310 lm (3W available on request)
- Deep hood shields the lens — projects 3.74″ round / 3.94″ square
- Anti-glare soft light · RA90 standard (RA80 / RA97 optional)



ETL | FCC | CE | RoHS | SAA | IP65 | IK08 | Wet Location

LUMEN OUTPUT	260 – 310 lm
COLOR TEMP / CCT	2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K
CRI	RA90 (RA80 / RA97 optional)
BEAM ANGLE	T2M 65° × 135° · BDF 120° (LM-20%)
LED SOURCE	GUBO
WATTAGE	6W (3W on request)
VOLTAGE	AC 100–277V 50/60Hz · AC 220–240V · AC 110–130V · DC 12V / 24V / 36V / 42V
DIMMING	Non-dimmable standard · TRIAC / 0–10V / DALI / DMX512 / PWM · Zigbee / Bluetooth / 2.4G RF

DRIVER	GUBO
FINISH	White, Black, Grey, Dark Grey, Brass
IP / IMPACT	IP65 · IK08
MATERIAL	Die-cast aluminum housing · corrosion-resistant plastic sleeve
LENS	High-efficiency PC lens
MOUNTING	Wall or ceiling surface · [FJP] plate for 4″ J-box
DIMENSIONS	Ø6.3″ round · 6.3″ square · projects 3.74″ / 3.94″
LIFETIME	>50,000 hrs

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	SHAPE	SIZE	VOLTAGE	CCT	CRI	DIMMING	FINISH
RUNE	RD Round SQ Square	63 6.3″ · 6W	U AC 100–277V AC220 AC 220–240V AC110 AC 110–130V DC12 DC 12V DC24 DC 24V DC36 DC 36V DC42 DC 42V	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 57 5700K 65 6500K TW Tunable White RGB RGBW RGBA	80 RA80 90 RA90 97 RA97	DT TRIAC DV 0–10V DA DALI DX DMX512 DP PWM ZB Zigbee BT Bluetooth RF 2.4G RF	WH White BK Black GY Grey AGY Dark Grey BR Brass

Build Your Order Code — example values shown in grey

MODEL		SHAPE		SIZE		VOLTAGE		CCT		CRI		DIMMING		FINISH
RUNE	–	SQ	–	63	–	U	–	30	–	90	–	DT	–	BK

FINISHES



WH
White (RAL9010)

BK
Black (RAL9005)

GY
Grey (RAL7042)

AGY
Dark Grey (RAL7016)

BR
Brass (RAL1024)

HOODED FACE — TRIM SHAPES




RD
Round
Ø6.3″ · projects 3.74″



SQ
Square
6.3″ · projects 3.94″

DIMENSIONS

SHAPE	SIZE	FACE SIZE	PROJECTION
RD Round	63	Ø6.3″ (160 mm)	3.74″ (95 mm)
SQ Square	63	6.3″ (160 mm)	3.94″ (100 mm)

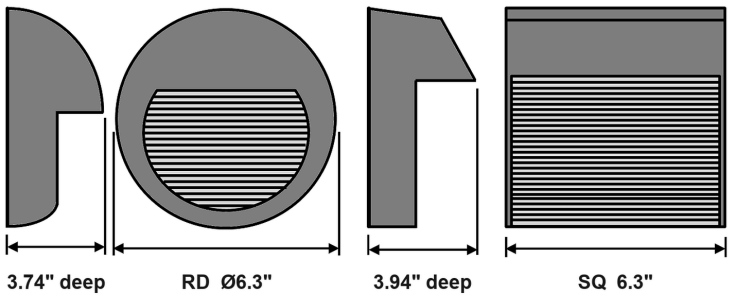

HOODED TRIMS IN ROUND (RD) AND SQUARE (SQ), 6.3″ FACE. SIDE PROFILE BESIDE EACH — THE HOOD PROJECTS 3.74″ (95 MM) ON THE ROUND AND 3.94″ (100 MM) ON THE SQUARE.

PHOTOMETRY

DELIVERED LUMENS — WHITE, RA90

Optic	CCT	6W
White (RA90)	2700K	260 lm
	3000K	280 lm
	3500K	280 lm
	4000K	310 lm
	5000K	310 lm
	5700K	310 lm
	6500K	300 lm

Nominal delivered lumens at RA90; tolerance ±10% at 25°C. The hooded trim is built on the 6W platform (6 × 2W SMD3030); a 3W build is available on request — consult the factory for its output.

DELIVERED LUMENS — TUNABLE WHITE & COLOR

Mode	Output	6W
TW Tunable White	Delivered	260 lm
RGB	Delivered	180 lm
RGBW	Delivered	260 lm
RGBA	Delivered	180 lm

Tunable White spans 2700K–6500K from one fixture. RGB / RGBW / RGBA are multi-chip (620 nm red · 520 nm green · 455 nm blue, plus 2700K white or amber); values are total delivered lumens with all channels at full.

BEAM ANGLE T2M 65° × 135° · BDF 120° (LM-20%) **EFFICACY** —