

Bocca

LED Area Luminaire

Decorative LED post-top luminaire with a cast-aluminum housing, stacked-ring styling, and four uprights. Available with clear, frosted, or white-opal acrylic lens plus optional shade and anti-glare shield — purpose-built for streetscapes, parks, campuses, and residential settings. Powered by the Radiant™ LED light engine.

- Radiant™ conformal-coated LED light engine
- Distributions: Type II, III, IV, V
- Clear / Frosted / White-Opal acrylic lens options
- Cast aluminum housing with rings & four uprights
- 0–10V dimmable electronic driver
- Surge protection: 6kV line-line / 10kV line-earth
- SH28 28" or SH21 small shade + AGS anti-glare shield
- Fitter slips over 3" or 2 $\frac{7}{8}$ " pole / tenon
- Build America, Buy America Act (BABA) compliant



ETL

UL 1598

IP66

BABA Compliant

LUMEN OUTPUT	Up to 7,526 lm
EFFICACY	Up to 133 lm/W
COLOR TEMP / CCT	3000K · 4000K · 5000K (2700K / Amber / LPS optional)
CRI	70+ (Ra)
DISTRIBUTION	Type II · III · IV · V
LED SOURCE	Radiant™ LED
WATTAGE	10 / 15 / 20 / 30 / 40 / 50 / 60 W
VOLTAGE	120–277V · 347/480V
DIMMING	0–10V

SURGE PROTECTION	6kV L-L · 10kV L-E
DRIVER	Electronic · 50/60Hz
FINISH	Black, Bronze, Dark Bronze, White, Green, Silver Metallic, Light Gray, Textured Black
IP / IMPACT	IP66 · Wet Location
MATERIAL	Cast aluminum · acrylic lens
DIMENSIONS	27" H · 12" dia. · 21"/28" shade
WEIGHT	28 lb (max)
WARRANTY	5 Years

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	WATTAGE	CCT	VOLTAGE	OPTIC	LENS	SHADE	CONTROLS	OPTIONS	FINISH
BOCCA	10 10W	30	U 120-277V	T2 Type II	CA Clear	N None	DV 0-10V dimming (standard)	N None	BK Black
	15 15W	3000K			FA Frosted	SH21 21"		AGS Anti-Glare	BZ Bronze
	20 20W	40	H 347/480V	T3 Type III	WA White-Opal	SH28 28"	PC Photocell	HS House-Side	DBZ Dark Bronze
	30 30W	4000K							WH White
	40 40W	50		T4 Type IV	N No Lens				GR Green
	50 50W	5000K							SM Silver Met.
	60 60W	27		T5 Type V					GY Light Gray
		2700K*							TBK Tex. Black
		AM							CC Custom
		Amber*							
		LPS							
		1800K*							

* 2700K, Amber & LPS (1800K) offered for select wattages — consult factory.


Build Your Order Code — example values shown in grey

MODEL	WATTAGE	CCT	VOLTAGE	OPTIC	LENS	SHADE	CONTROLS	OPTIONS	FINISH
BOCCA	40	30	U	T5	CA	SH28	DV	N	BZ


STANDARD FINISHES




BK
Black



BZ
Bronze



DBZ
Dark Bronze



WH
White




GR
Green



SM
Silver Metallic




GY
Light Gray



TBK
Textured Black

DIMENSIONS & WEIGHT

FIXTURE	HEIGHT	Ø FIXTURE	Ø SHADE	EPA (LENS / NONE)	WEIGHT	POLE FIT
Overall	27" (686 mm)	12" (305 mm)	21" / 28"	2.78 / 1.45 sq ft	28 lb (12.7 kg)	3" or 2 $\frac{7}{8}$ " tenon

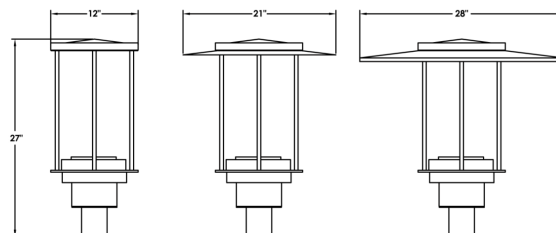

MOUNTING





OPTIONS

OPTIONS

PC	Button Eye Photocell
AGS	Anti-Glare Shield
HS	House-Side Shield

CONFIGURATION EXAMPLES

Representative lens · shade · shield combinations — order any mix per the matrix.

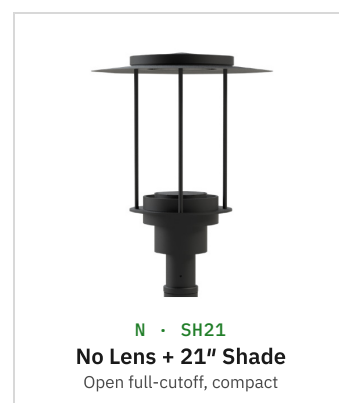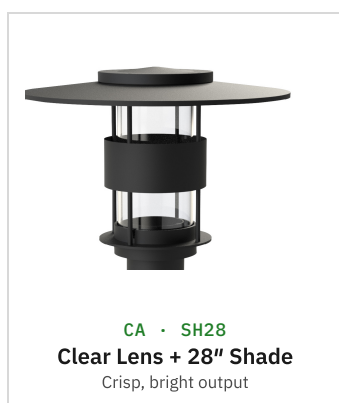

PHOTOMETRY

DELIVERED LUMENS – LENSED (CLEAR / FROSTED)

Optic	CCT	10W 10.2W	15W 14.6W	20W 20.4W	30W 30.6W	40W 40.8W	50W 51.0W	60W 56.6W
Type II	3000K	1,344 lm	1,763 lm	2,352 lm	3,527 lm	4,703 lm	5,878 lm	7,055 lm
	4000K	1,371 lm	1,800 lm	2,400 lm	3,600 lm	4,800 lm	6,001 lm	7,200 lm
	5000K	1,392 lm	1,828 lm	2,437 lm	3,655 lm	4,874 lm	6,091 lm	7,310 lm
	BUG	B0-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2
Type III	3000K	1,342 lm	1,760 lm	2,348 lm	3,521 lm	4,695 lm	5,869 lm	7,043 lm
	4000K	1,369 lm	1,797 lm	2,396 lm	3,595 lm	4,792 lm	5,991 lm	7,188 lm
	5000K	1,390 lm	1,825 lm	2,433 lm	3,649 lm	4,866 lm	6,081 lm	7,298 lm
	BUG	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2
Type IV	3000K	1,312 lm	1,721 lm	2,296 lm	3,443 lm	4,591 lm	5,739 lm	6,887 lm
	4000K	1,339 lm	1,758 lm	2,343 lm	3,515 lm	4,686 lm	5,858 lm	7,029 lm
	5000K	1,359 lm	1,784 lm	2,379 lm	3,569 lm	4,758 lm	5,947 lm	7,136 lm
	BUG	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G2	B2-U3-G2	B2-U3-G2
Type V	3000K	1,373 lm	1,801 lm	2,402 lm	3,603 lm	4,804 lm	6,005 lm	7,207 lm
	4000K	1,401 lm	1,839 lm	2,452 lm	3,678 lm	4,903 lm	6,130 lm	7,355 lm
	5000K	1,423 lm	1,867 lm	2,489 lm	3,734 lm	4,979 lm	6,222 lm	7,467 lm
	BUG	B1-U2-G1	B1-U2-G1	B2-U2-G1	B2-U2-G1	B3-U3-G1	B3-U3-G1	B3-U3-G2

Type V also available with White-Opal lens (~80% output). Values shown with the decorative acrylic lens.

DELIVERED LUMENS – OPEN FULL CUTOFF (NO SECONDARY LENS - CODE N)

Optic	CCT	10W 10.2W	15W 14.6W	20W 20.4W	30W 30.6W	40W 40.8W	50W 51.0W	60W 56.6W
Type II	3000K	1,099 lm	1,634 lm	2,179 lm	3,268 lm	4,358 lm	5,447 lm	6,537 lm
	4000K	1,112 lm	1,668 lm	2,224 lm	3,336 lm	4,448 lm	5,560 lm	6,672 lm
	5000K	1,129 lm	1,693 lm	2,258 lm	3,387 lm	4,516 lm	5,644 lm	6,774 lm
	BUG	B0-U0-G0	B1-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G1
Type III	3000K	1,142 lm	1,713 lm	2,284 lm	3,427 lm	4,569 lm	5,711 lm	6,853 lm
	4000K	1,165 lm	1,749 lm	2,332 lm	3,497 lm	4,664 lm	5,829 lm	6,996 lm
	5000K	1,183 lm	1,776 lm	2,367 lm	3,550 lm	4,734 lm	5,919 lm	7,102 lm
	BUG	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2
Type IV	3000K	1,140 lm	1,711 lm	2,281 lm	3,422 lm	4,562 lm	5,703 lm	6,843 lm
	4000K	1,164 lm	1,747 lm	2,329 lm	3,492 lm	4,657 lm	5,821 lm	6,986 lm
	5000K	1,182 lm	1,773 lm	2,364 lm	3,546 lm	4,728 lm	5,910 lm	7,092 lm
	BUG	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3
Type V	3000K	1,210 lm	1,815 lm	2,420 lm	3,632 lm	4,842 lm	6,052 lm	7,262 lm
	4000K	1,235 lm	1,854 lm	2,471 lm	3,706 lm	4,942 lm	6,177 lm	7,413 lm
	5000K	1,254 lm	1,882 lm	2,508 lm	3,762 lm	5,017 lm	6,272 lm	7,526 lm
	BUG	B1-U0-G0	B1-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2

Full-cutoff (Lens = N): zero uplight — BUG U0 across all outputs. Refer to the fixture's IES file for detailed data.

Distribution Type II · III · IV · V **Efficacy** Up to 133 lm/W **CRI** 70+ (Ra) **IES File** Available on request