

MARCO

Dual-Head Emergency Light

An interior emergency light with two adjustable LED heads, available in square or round configurations. Delivers 180 lumens on battery, with an integrated nickel-cadmium battery providing 90 minutes of emergency operation. Features an injection-molded thermoplastic housing with universal J-box mounting.

- Interior dual head emergency lights
- 180 lumens light output
- 120 / 277VAC dual voltage operation at 2.4W
- Integral 3.6V 1000mAh nickel-cadmium battery, 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- Self-diagnostic option available on square heads
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Long-lasting white or black finish · universal J-box mounting



cULus

FCC

CEC

RoHS



LUMEN OUTPUT	180 lm	RECHARGE TIME	24 hours maximum
LED SOURCE	24 LEDs — two lamp heads	FINISH	White · Black
WATTAGE	2.4W	MATERIAL	Injection-molded thermoplastic ABS housing · UL 94V-0 flame rating
VOLTAGE	120 / 277V AC dual voltage	MOUNTING	Universal J-box mounting
BATTERY	3.6V 1000mAh nickel-cadmium, built in	DIMENSIONS	13.70" W × 3.50" H × 3.70" D (square) · 11.00" × 4.30" × 2.60" (round)
EMERGENCY RUNTIME	90 minutes	WARRANTY	5-Year electrical parts & housing

HEAD STYLE & FINISH

 SQ-WH Square · White	 SQ-BK Square · Black	 RD-WH Round · White
--	--	---

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	SHAPE	OPTIONS	FINISH
MARCO	SQ Square Heads	N None SD Self-Diagnostic*	WH White BK Black
	RD Round Heads	N None	WH White

* Self-diagnostic ships in white only.


Build Your Order Code — example values shown in grey

MODEL	SHAPE	OPTIONS	FINISH
MARCO	SQ	N	WH


DIMENSIONS

MODEL	WIDTH	HEIGHT	DEPTH	HEAD
MARCO-SQ	13.70" (348 mm)	3.50" (89 mm)	3.70" (94 mm)	3.70" (94 mm) square · 10.00" base
MARCO-RD	11.00" (279 mm)	4.30" (109 mm)	2.60" (66 mm)	Ø3.50" (89 mm)

MARCO-SQ

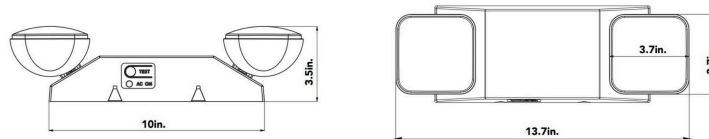

MARCO-RD

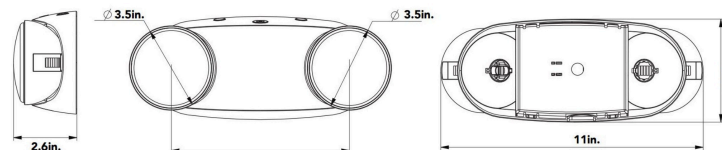

MARCO DUAL-HEAD EMERGENCY LIGHT — SQUARE AND ROUND HEADS. SQUARE: FRONT ELEVATION AND TOP VIEW; ROUND: SIDE, FACE AND TOP VIEWS.

ELECTRICAL & EMERGENCY PERFORMANCE

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED SOURCE	RECHARGE	EMERGENCY RUNTIME
MARCO	120 / 277V	0.020 – 0.010A	2.4W	24 LEDs, two heads	24 hrs	90 min

Values as published by the manufacturer. Contact CIP for custom configurations.