



Light Outside

Light Inside



CIP-K-3 Tier

PRODUCT DESCRIPTION

Introducing the CIP-K Series Circular Lighting, a harmonious modern design and functionality. Crafted from extruded aluminum with meticulously designed lenses, these luminaires offer options illumination inside or outside. Available in sizes ranging from 31.5" to 70.87", allowing for versatile configurations. With tunable white and RGBW options, select from over 6,500 powder-coated colors to set the perfect ambiance. Delivered fully assembled for your convenience.

FEATURES


- 5-year limited warranty.
- Ships assembled.
- Illumination inside/outside aluminum
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Fixture lumens per watt ratio up to 75 LPW for illumination
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX and Zigbee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch

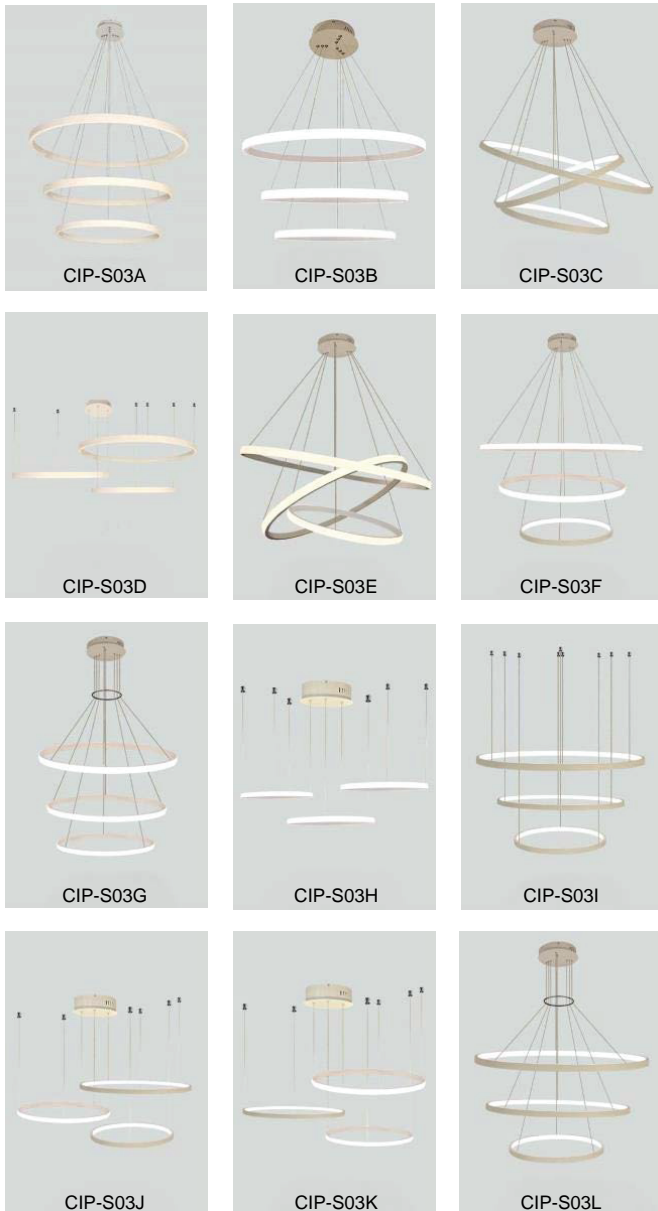

MODEL INFORMATION:

Example: CIP-S03A-150W-S-B

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*CIP-S03A CIP-S03B CIP-S03C CIP-S03D	*150W=47.24"+39.37"+31.50"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default) C=Dali	*B=Black Jack S=Platinum Silver	*Blank=10' foot 120" (default) 5'=5 foot 60"
CIP-S03E CIP-S03F CIP-S03G CIP-S03H	180W=59.06"+47.24"+39.37"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White O=Oil Rubbed Bronze	15'=15 foot 180" 20'=20 foot 240"
CIP-S03I CIP-S03J CIP-S03K CIP-S03L	210W=70.87"+ 59.06"+47.24"	T=3K-4K Tunable White control by remote/wall control R3= RGB+3000K R4=RGB+4000K	L=ELV / Triac dimming Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.		25'=25 foot 300" 30'=30 feet 360"
<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</p>					

STANDARD COLOR FINISHES

PSS-5690
Gloss White



PMB-8173
Platinum Silver



USS-1522
Black Jack



PCB-1102
Oil Rubbed Bronze





SOLID TONE FINISH

PMB-4364 Pearl White	PMB-0593 Soft White	PSB-8051 Dirty White	PMB-0513 Silver Metallic II	PMB-6525 BMW Silver	HSS-1336 Silk Satin Black
PPS-0106 Ink Black	USS-2603 Gloss Black	UMB-0336 Metallic Bronze	UMB-0493 US Bronze	EMS-0940 Spanish Gold	PMB-0808 Performance Gold
PSS-4971 Very Red	PSS-2876 Orange Glow	PSS-1791 JuJu Orange	PSS-0118 Spring Yellow	PSB-5945 Bright Green	PMB-10657 Yama Blue
PPB-2846 Purple Glaze	PSS-1670 Rosette Pink	PSS-4008 Jewel Grey	PSS-4500 Crest Grey	PSS-4647 Beach Tan	PMB-5478 Montana Gold

SHIMMER/ GLITTER FINISH

PMB-5567 Champagne Shimmer	UMB-2062 Shimmer Gold	PMS-5677 Shimmer Copper	PMB-6611 Shimmer Black	PPB-8167 Trans Glitter Gold	PMB-6762 Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

PALLEON METALLIC TEXTURED FINISH

PVB-10274 Palleon Paradise	PVB-10272 Palleon Fire	PVB-10271 Palleon Golden Green	PVB-10268 Dark Palleon Paradise	PVB-10267 Dark Palleon Golden Green	PVB-10268 Dark Palleon Fire
PVB-10273 Palleon Panther	PVB-10269 Dark Palleon Panther				

CHROME/SPECIALTY FINISH

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PPS-6530 Brassy Gold	PPB-2262 Anodized Gold	PPB-8034 Melted Bronze	PPB-6325 Metallic Clear	PPB-5633 Tinted Clear	PPB-5936 Anodized Red

SPARKLE FINISH

PPB-4694 Super Red Sparkle	PPB-4727 Silver Sparkle	PPB-5835 Rockstar Sparkle	PMB-4130 Pearl Sparkle	PPB-5004 Ultra Blue Sparkle	PPB-5078 Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	PMB-6769 Deep Blue Sparkle	PPB-4499 Gold Sparkle	PMB-4417 Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISH

PWB-2232 Wetstone Black	PWB-9157 Wetstone Gold Bronze	PWB-9156 Wetstone Copper	PWB-2343 Wetstone Rock Bronze	PWB-2590 Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

LUMEN OUTPUT

Model Number	Size	Wattage	Kelvin Temp field Selectable \pm 500K	Delivered Lumen \pm 10%
CIP-S03A/B/C/D/E/F/G/H/I/J/K/L	47.24"+39.37"+31.50"	150W	3000K/3500K/4000K or 2700K/3500K/4000K	11250 lm
	59.06"+47.24"+39.37"	180W	3000K/3500K/4000K or 2700K/3500K/4000K	13500 lm
	70.87"+ 59.06"+47.24"	210W	3000K/3500K/4000K or 2700K/3500K/4000K	15750 lm

EMERGENCY BATTERY OPTIONS

PICTURE	MODEL NUMBER	DESCRIPTION
	EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes


RGBW/TUNABLE WHITE SMART CONTROL

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


CIP-S03A Canopy mount with ring light inside.

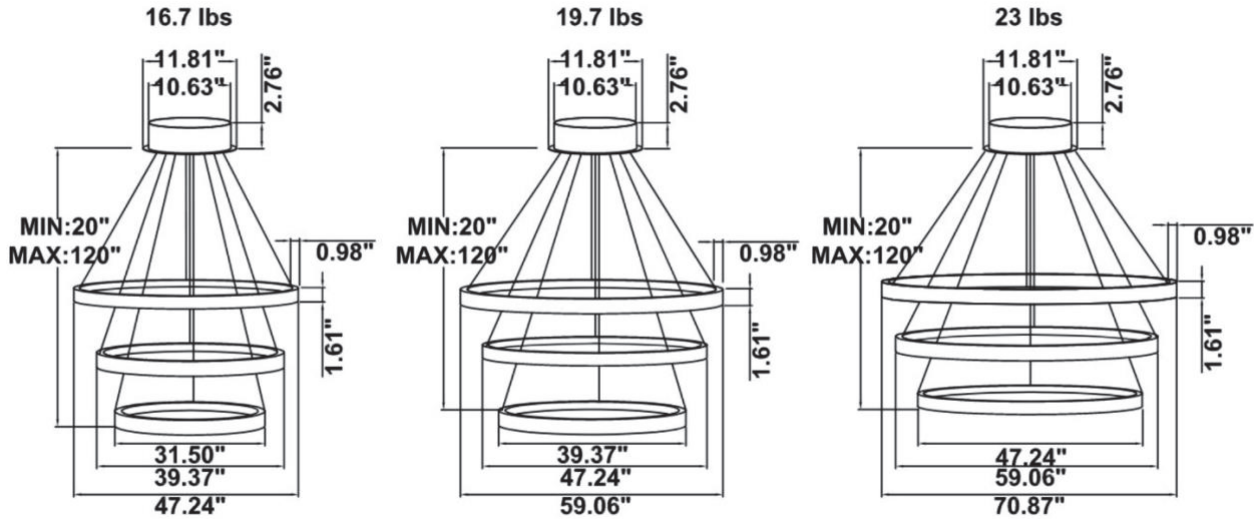


CIP-S03B Canopy mount with ring light outside.

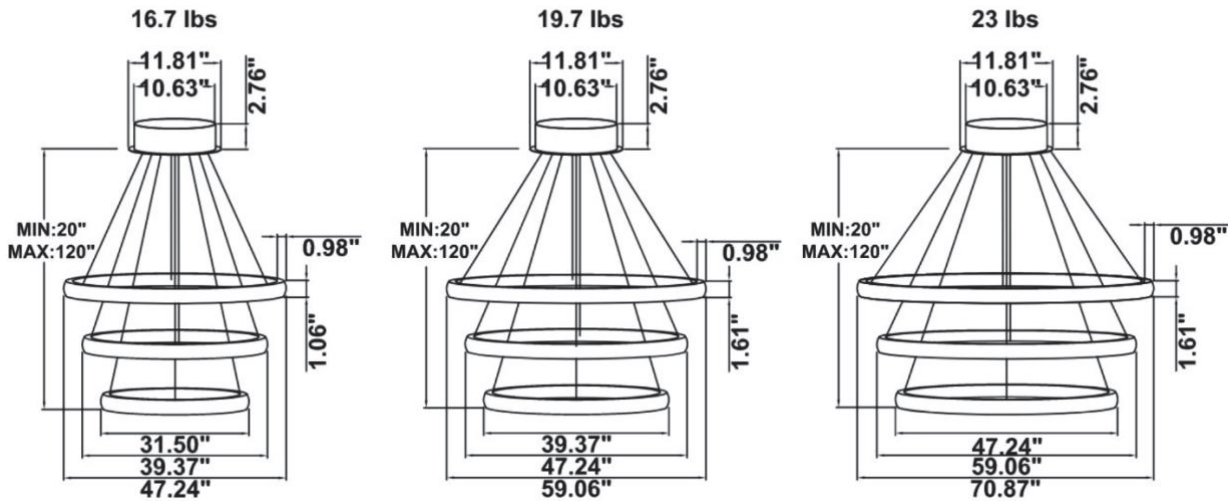


CIP-S03C Canopy mount with swiveled rings, light inside.

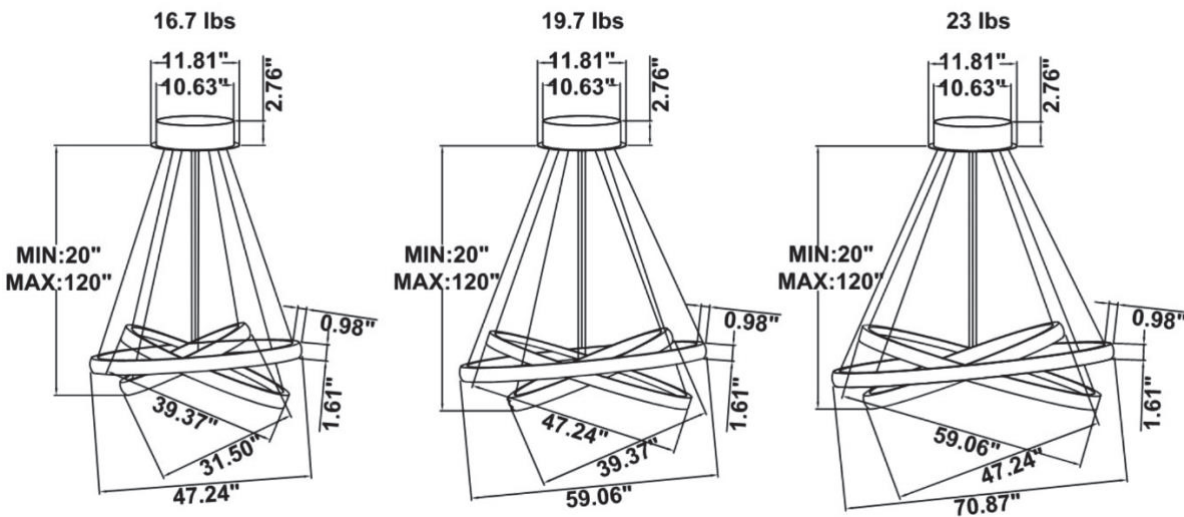


CIP-S03D Remote mount with canopy, cables fixed directly to the ceiling, light inside.

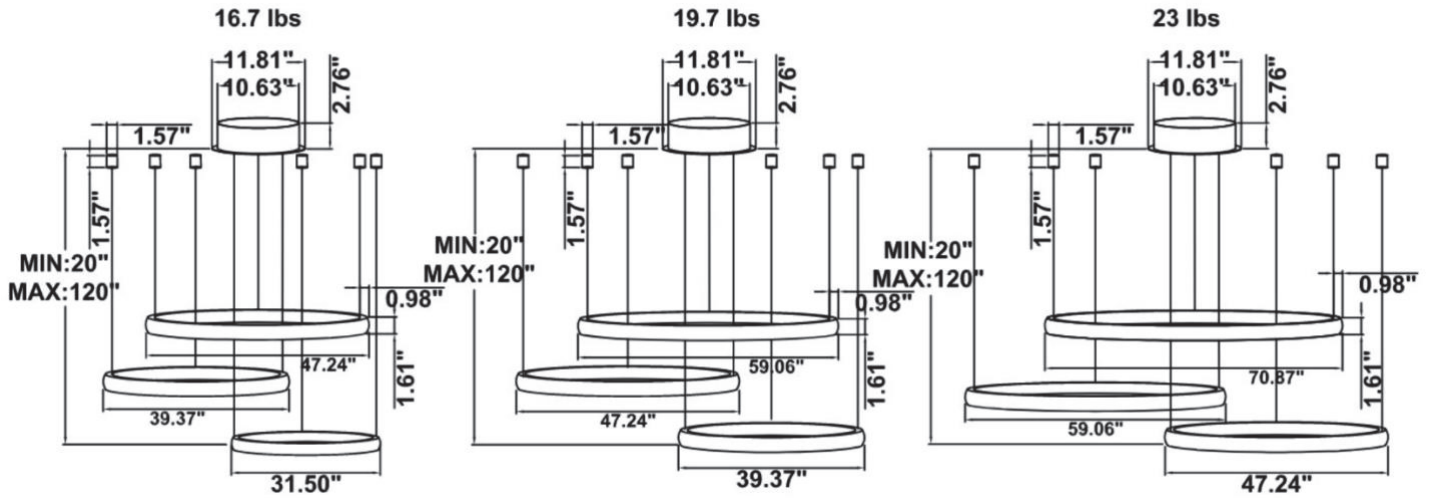


CIP-S03E Canopy mount with swiveled rings, light outside.

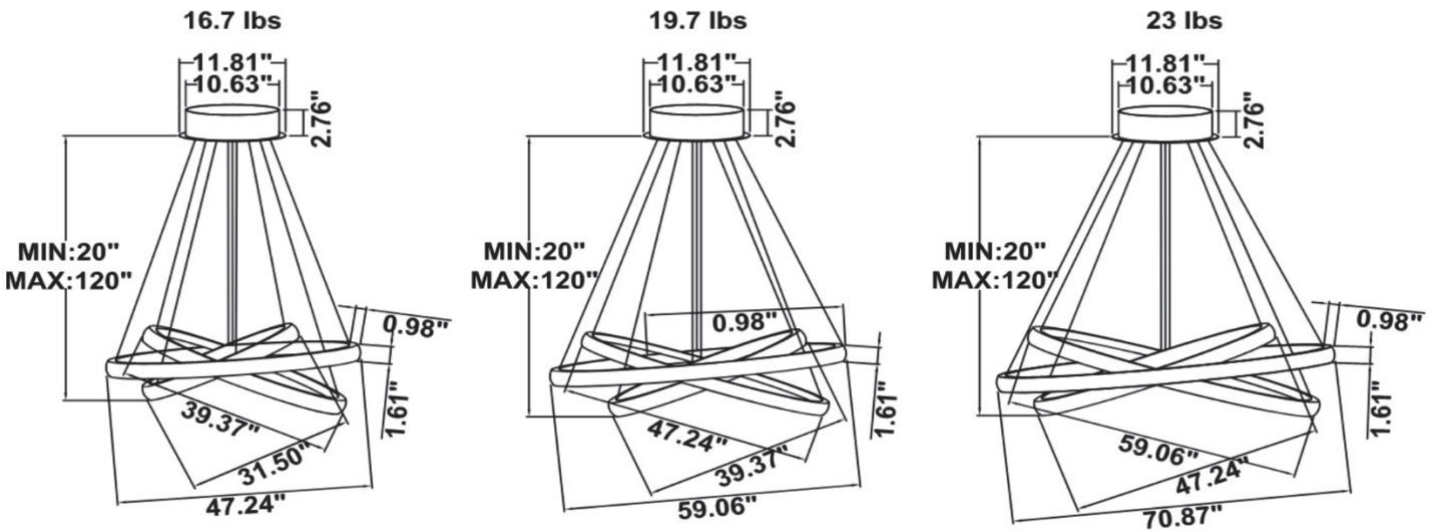


CIP-S03F Canopy mount with top two ring lights outside, and the bottom ring light inside.

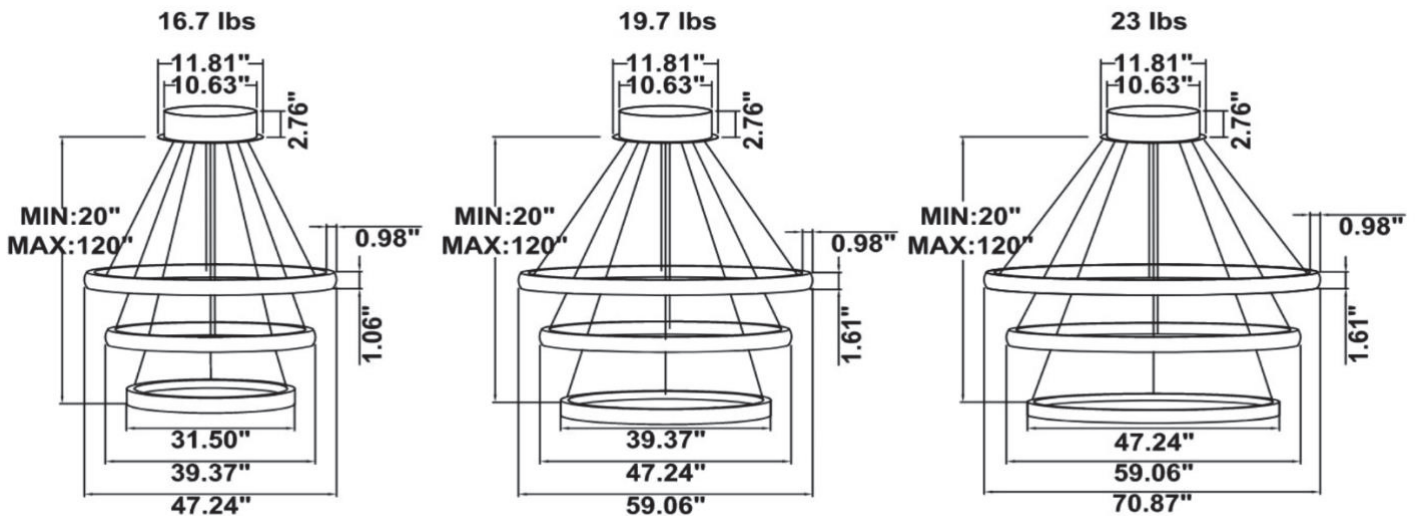


CIP-S03G Canopy mount with accent ring, light outside.

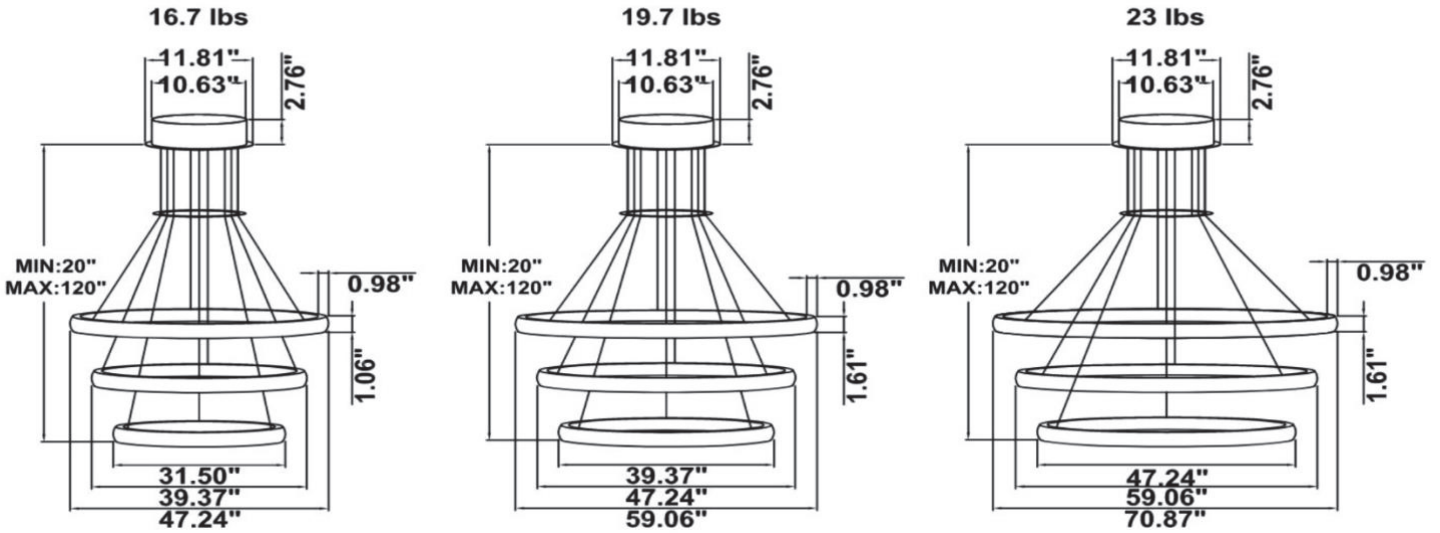


CIP-S03H Remote mount with canopy, cables fixed directly to the ceiling, light outside.

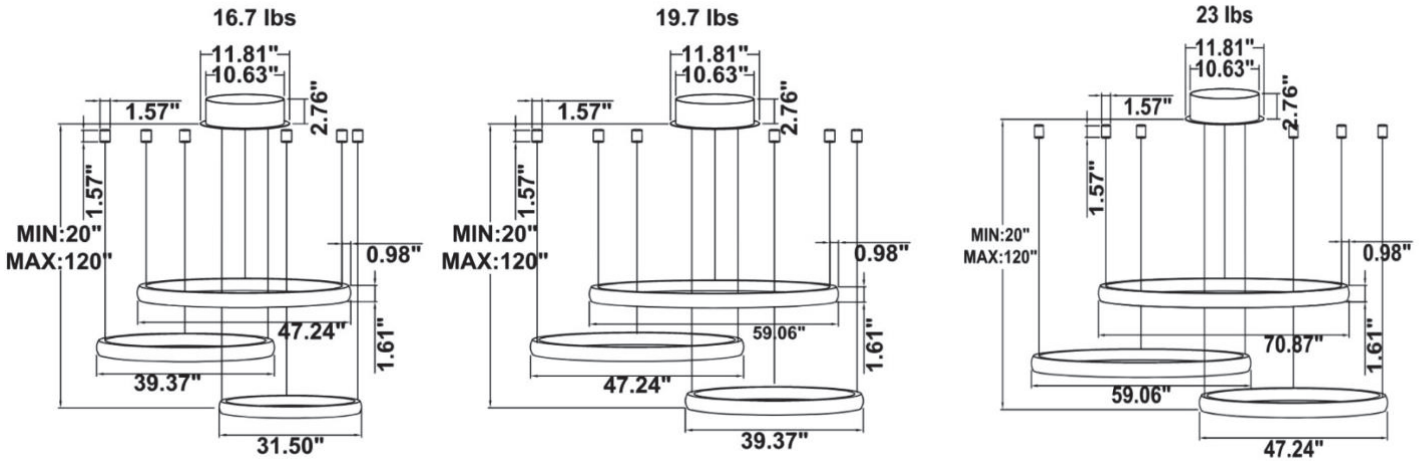


CIP-S03I Remote driver, cables fixed directly to the ceiling with ring light inside.
 (Driver box size: L10.83" X W3.78" X H1.81")

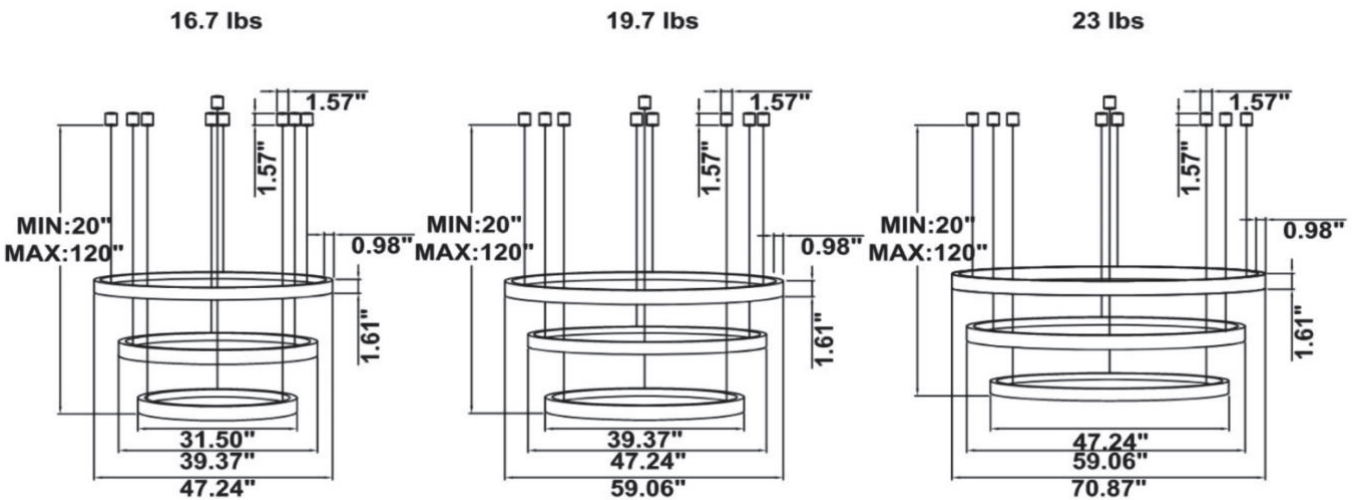


CIP-S03J Remote mount with canopy, cables fixed directly to the ceiling with upper and lower light inside, center light outside.

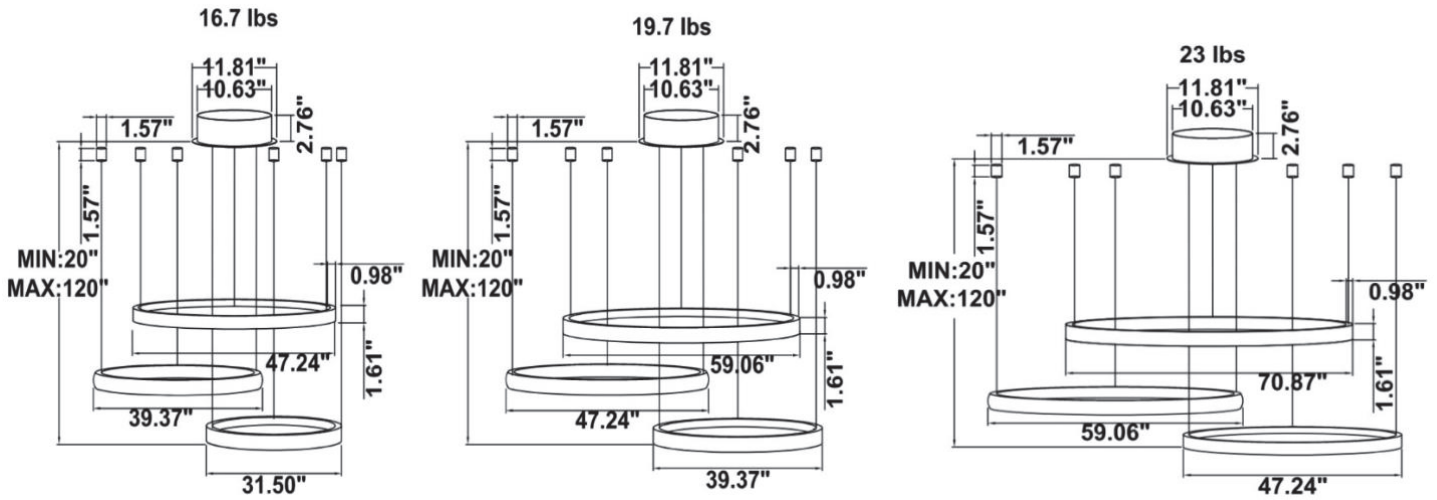

CIP-S03K Remote mount with canopy, cables fixed directly to the ceiling, upper and lower light outside, center light inside.

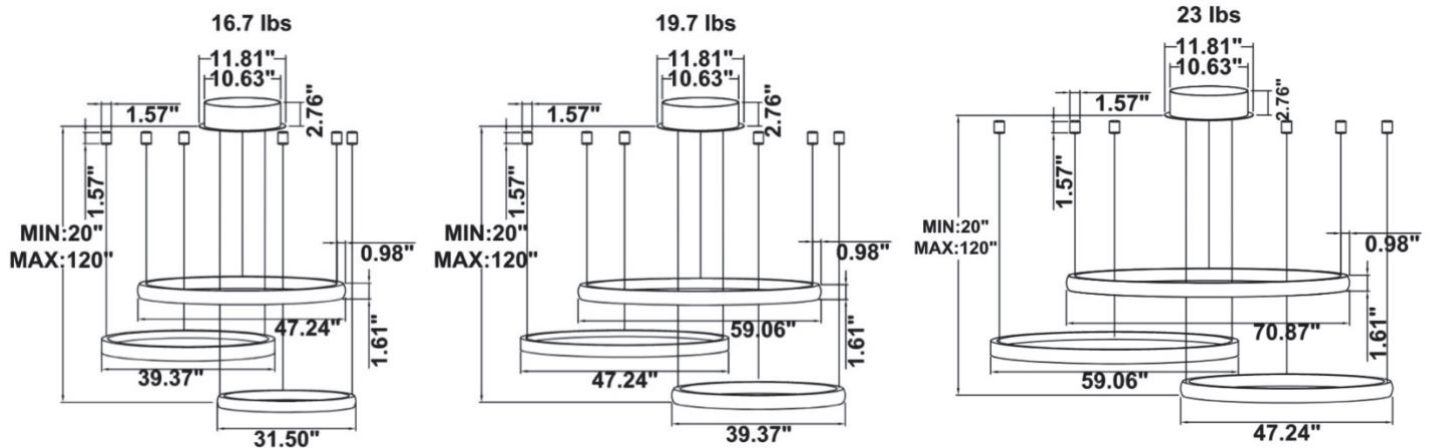


CIP-S03L Canopy mount with accent ring, light inside.

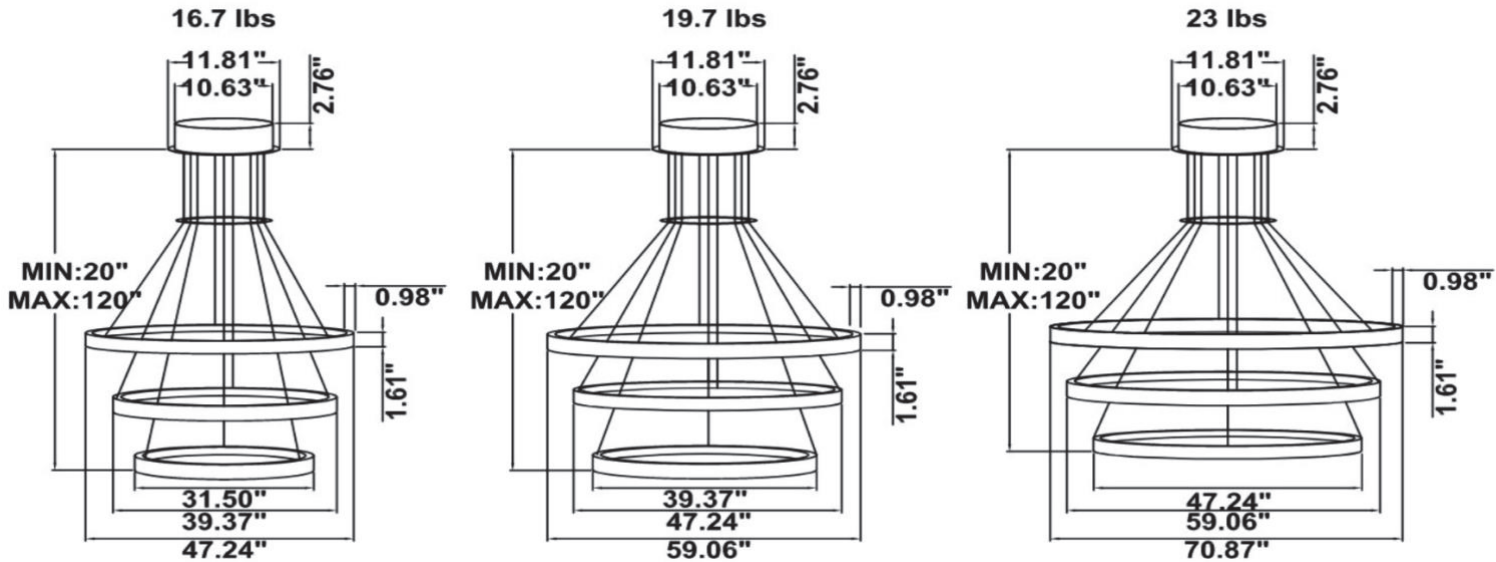


PHOTOMETRIC: Illumination outside the profile, light inside


CIP-S01A40WZ 31.50" 40W @ 4000K

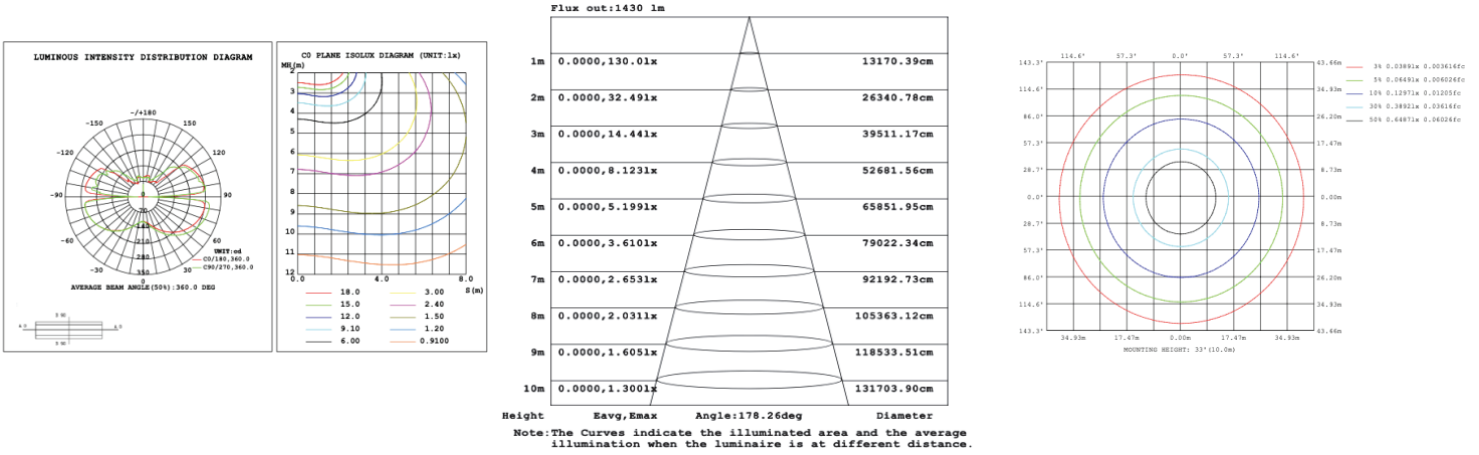




CIP-S01A50WZ 39.37" 50W @ 4000K

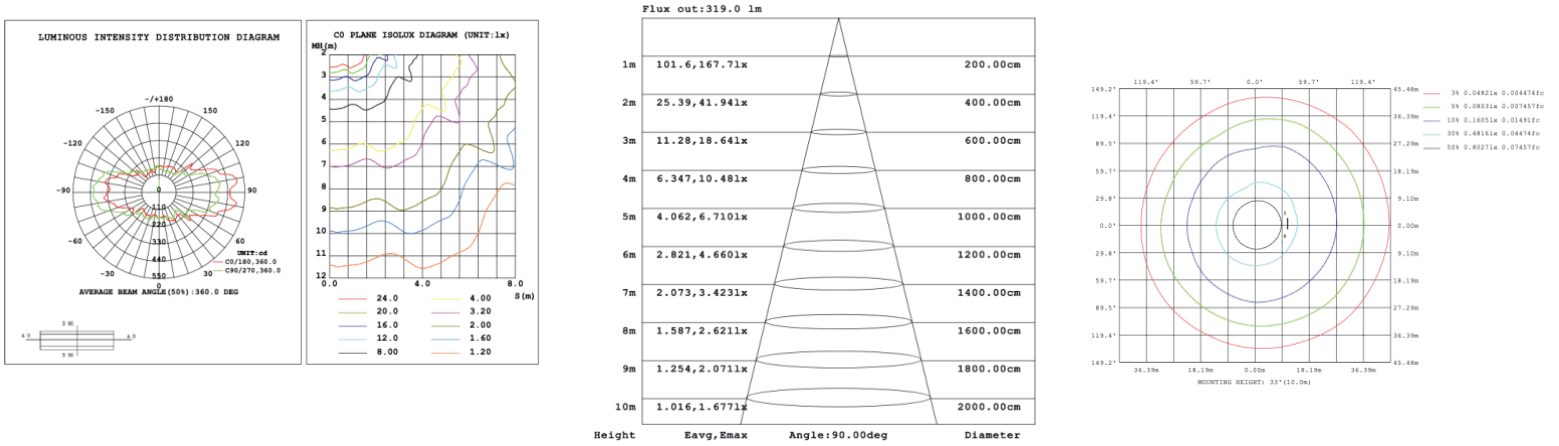




CIP-S01A60WZ 47.24" 60W @ 4000K

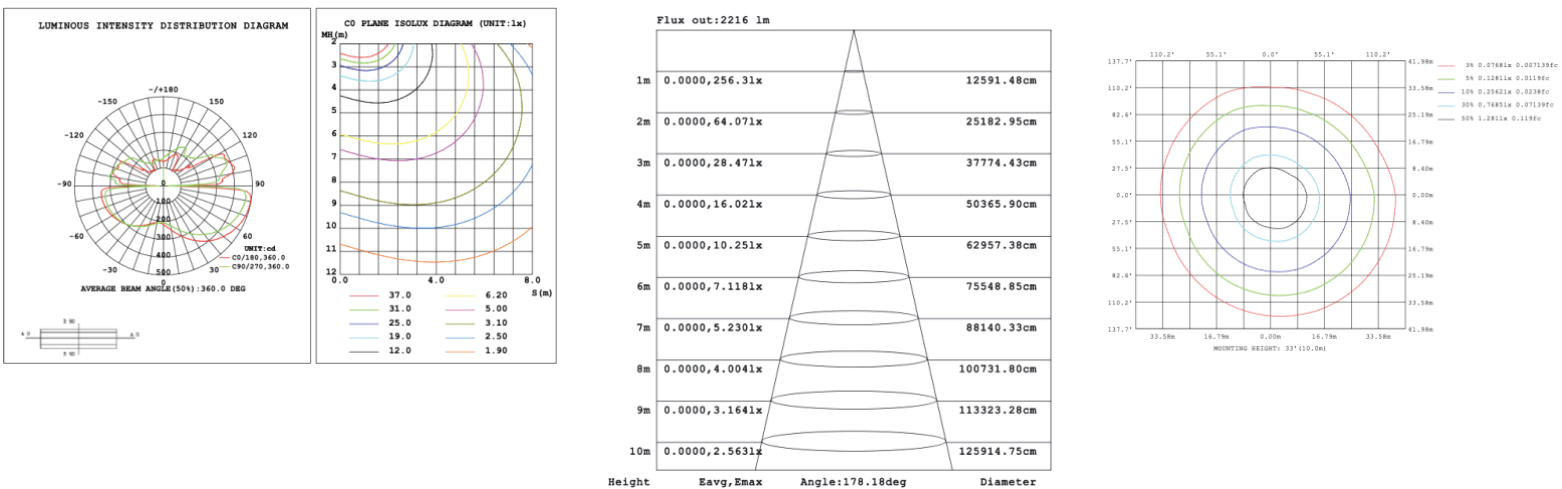

CIP-S01A70WZ 59.06" 70W @ 4000K

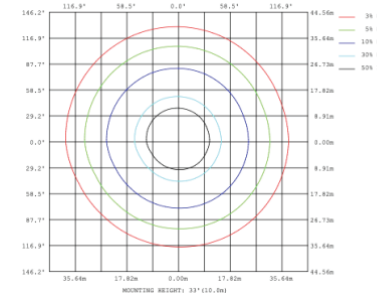
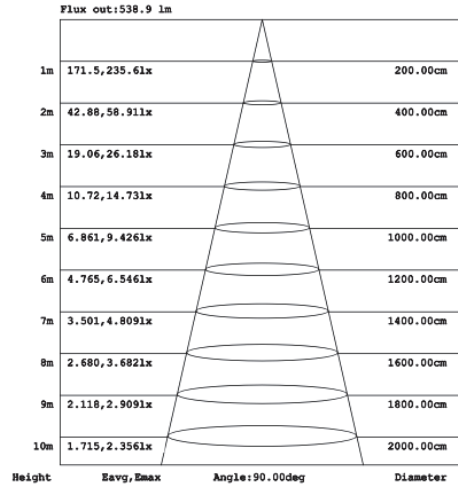
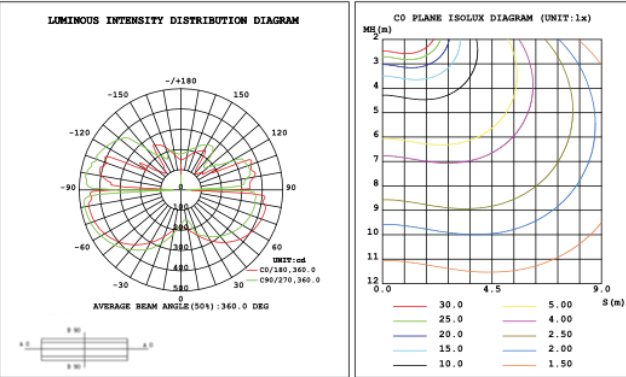


CIP-S01A80WZ 70.87" 80W @ 4000K

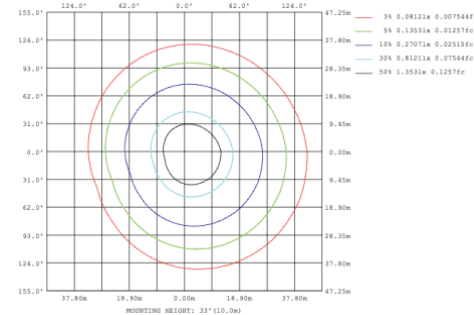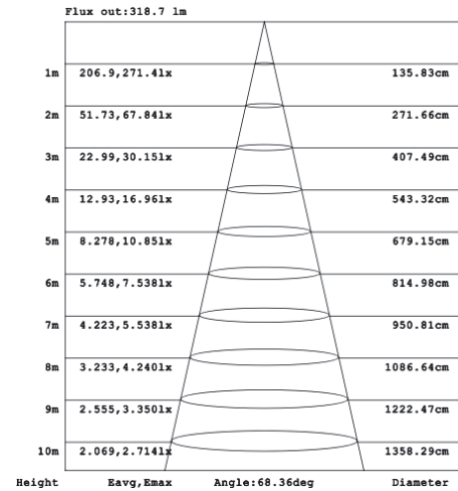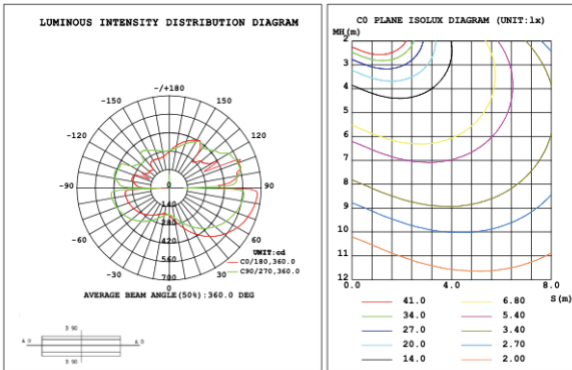


Illumination inside the profile, light outside


CIP-S01B40WZ 31.50" 40W @ 4000K

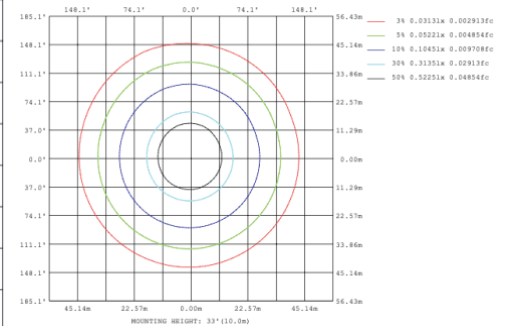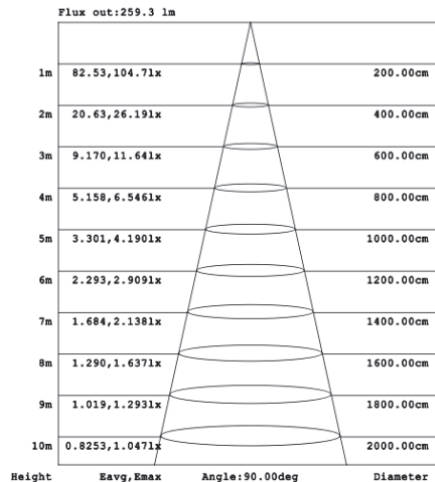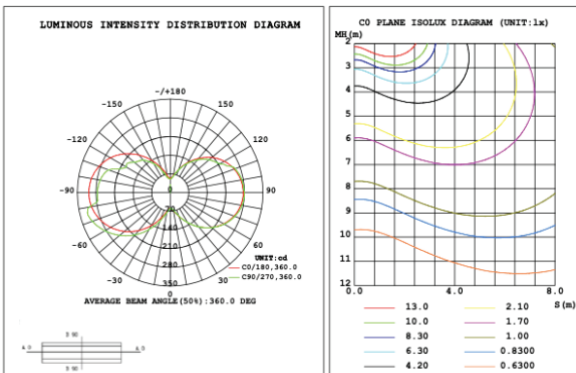


CIP-S01B50WZ 39.37" 50W @ 4000K

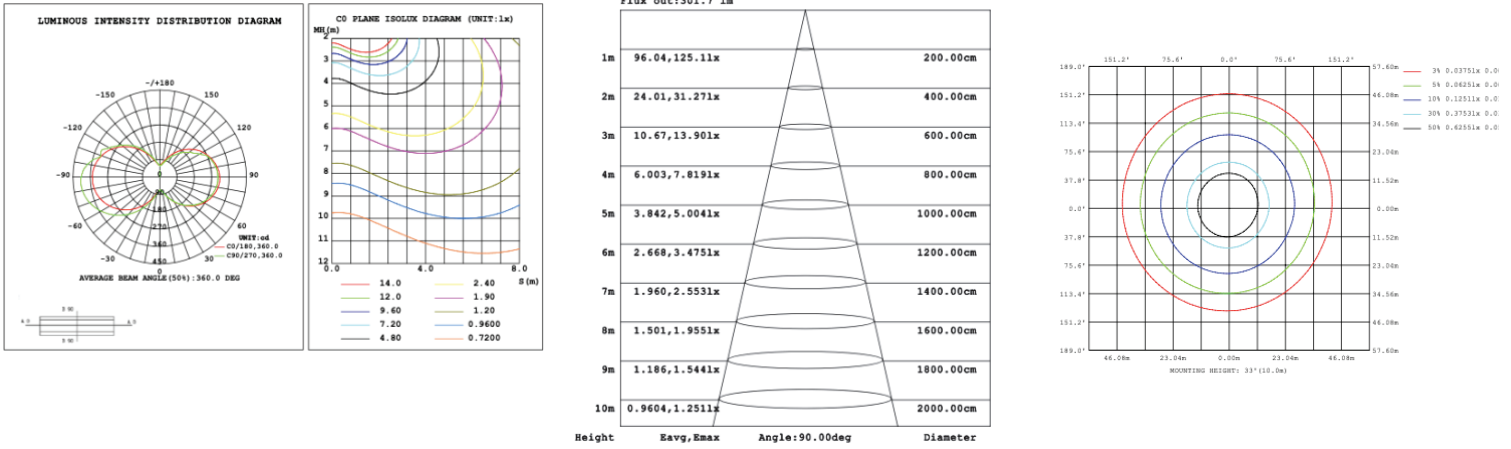



CIP-S01B60WZ 47.24" 60W @ 4000K

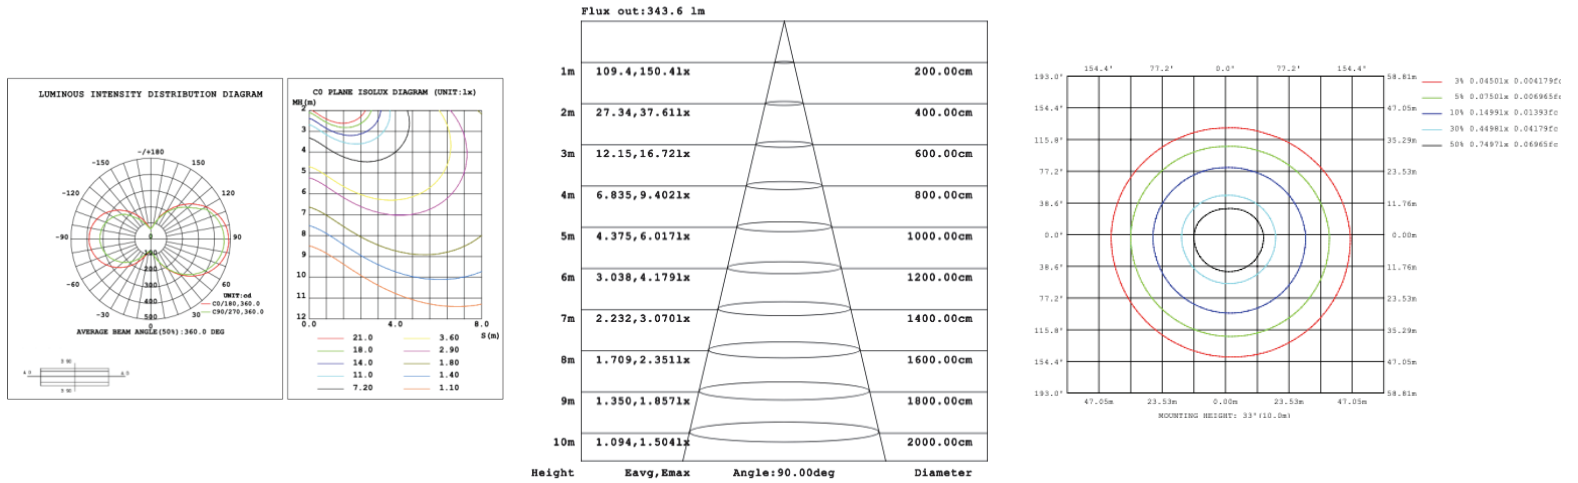

CIP-S01B70WZ 59.06" 70W @ 4000K

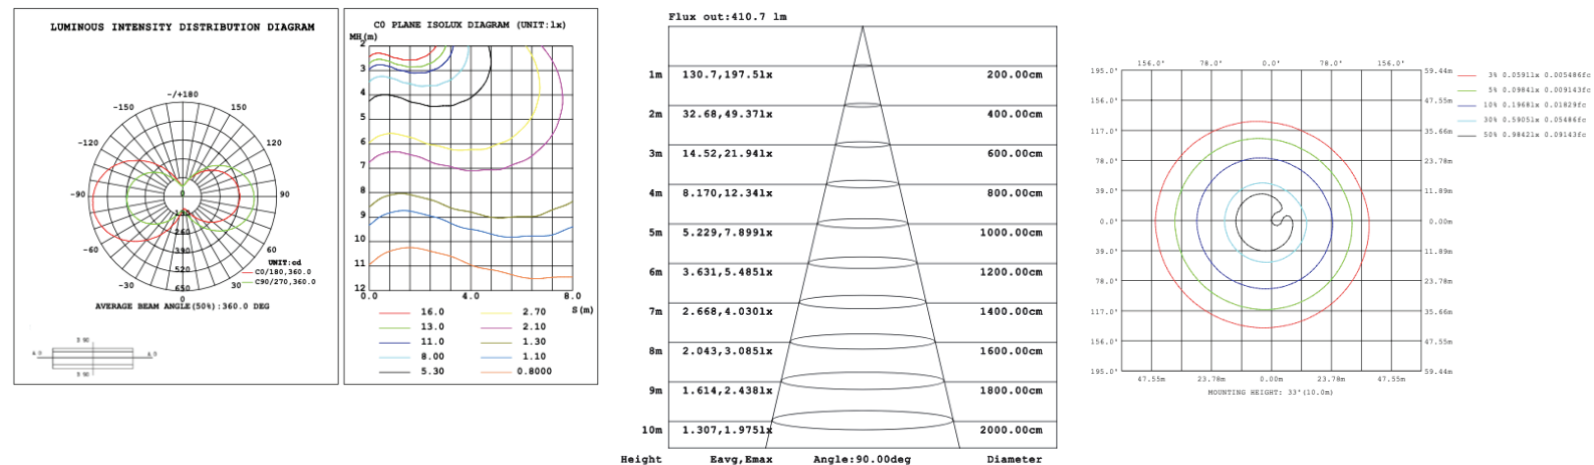

CIP-S01B80WZ 70.87" 80W @ 4000K

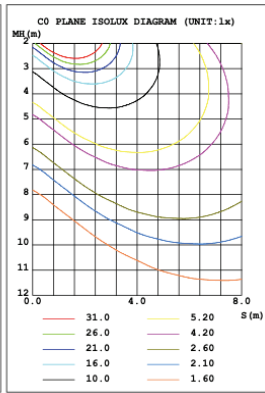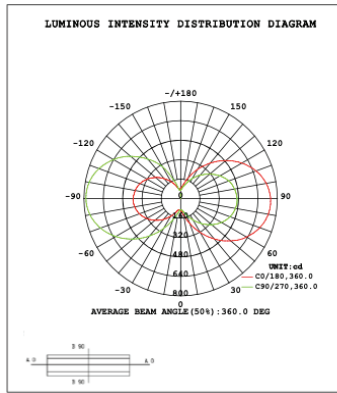

Flux out: 448.2 lm

Height	Eavg, Emax	Angle: 90.00deg	Diameter
1m	142.7, 208.3lx		200.00cm
2m	35.66, 52.07lx		400.00cm
3m	15.85, 23.14lx		600.00cm
4m	8.916, 13.02lx		800.00cm
5m	5.706, 8.331lx		1000.00cm
6m	3.963, 5.786lx		1200.00cm
7m	2.911, 4.251lx		1400.00cm
8m	2.229, 3.254lx		1600.00cm
9m	1.761, 2.571lx		1800.00cm
10m	1.427, 2.083lx		2000.00cm

