

## CIP-WH-D06

### PRODUCT DESCRIPTION

Discover this Circular Pendant, customize up to 6 rings.

A fusion of sleek design and practicality. Crafted from extruded aluminum with a glare-free acrylic ring, these pendants offer sizes from 15.75" to 70.87", allowing for versatile configurations.

With tunable white and RGBW options, choose from over 6500 powder-coated colors to set the perfect ambiance.

Shipped assembled for convenience.

### FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens.
- Fixture delivered lumens per watt ratio up to 80 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- **UL listed, suitable for dry location. (BAA) Buy American compliant.**
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.




CIP-D06A



CIP-D06B



CIP-D06C




CIP-D06D



### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



Selectable CCT






**MODEL INFORMATION:**

**Example: CIP-D06A-270W-S-B**

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*CIP-D06A	*270W=59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default)
	280W=70.87"+59.06"+47.24"+39.37"+31.50"+23.62"		C= Dali		5'=5 foot 60"
CIP-D06B CIP-D06C	320W=39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	S=Platinum Silver	15'=15 foot 180"
	330W=39.37"+47.24"+59.06"+47.24"+39.37"+31.50"				
	390W=47.24"+59.06"+70.87"+59.06"+47.24"+39.37"				
CIP-D06D	180W=23.62"+31.5"+15.75"+31.5"+23.62"+15.75"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	W=Gloss White	20'=20 foot 240"
	210W=31.50"+47.24"+15.75"+23.62"+15.75"+39.37"				
	330W=47.24"+59.06"+39.37"+47.24"+39.37"+31.50"	R3= RGB+3000K	L=ELV / Triac dimming	O=Oil Rubbed Bronze	25'=25 foot 300"
	380W=59.06"+70.87"+47.24"+59.06"+47.24"+31.50"	R4=RGB+4000K			30'=30 foot 360"
	390W=59.06"+70.87"+47.24"+59.06"+47.24"+39.37"				

**STANDARD COLOR FINISHES**




Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.

## LUMEN OUTPUT

Model Number	Size	Wattage	Kelvin Temp field Selectable $\pm 500K$	Delivered Lumen $\pm 10\%$
CIP-D06A	59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	21600 lm
	70.87"+59.06"+47.24"+39.37"+31.50"+23.62"	280W	2700K/3500K/4000K or 3000K/3500K/4000K	22400 lm
CIP-D06B/C	39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	25600 lm
	39.37"+47.24"+59.06"+47.24"+39.37"+31.50"	330W	2700K/3500K/4000K or 3000K/3500K/4000K	26400 lm
	47.24"+59.06"+70.87"+59.06"+47.24"+39.37"	390W	2700K/3500K/4000K or 3000K/3500K/4000K	31200 lm
CIP-D06D	23.62"+31.5"+15.75"+ 31.5"+23.62"+15.75"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	14400 lm
	31.50"+47.24"+15.75"+23.62"+15.75"+39.37"	210W	2700K/3500K/4000K or 3000K/3500K/4000K	16800 lm
	47.24"+59.06"+39.37"+ 47.24"+39.37"+31.50"	330W	2700K/3500K/4000K or 3000K/3500K/4000K	26400 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+31.50"	380W	2700K/3500K/4000K or 3000K/3500K/4000K	30400 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+39.37"	390W	2700K/3500K/4000K or 3000K/3500K/4000K	31200 lm

## EMERGENCY BATTERY OPTIONS

PICTURE	MODEL NUMBER	DESCRIPTION
	-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## RGBW/TUNABLE WHITE SMART CONTROL

### Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.






**CIP-D06C Remote driver with cables fixed directly to the ceiling, direct lighting.**  
**(Driver box size: L10.83" X W3.78" X H1.81")**

46.6 lbs

47.8 lbs

59.7 lbs

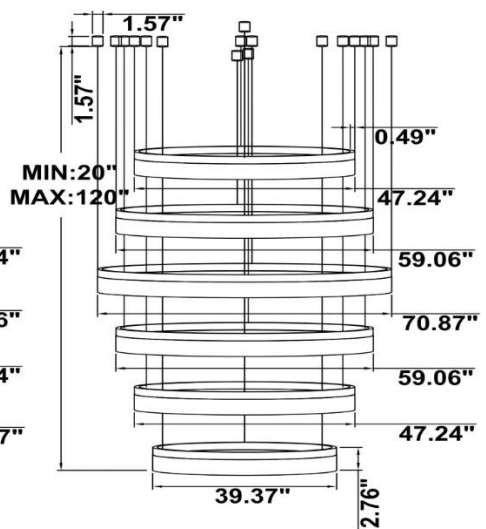
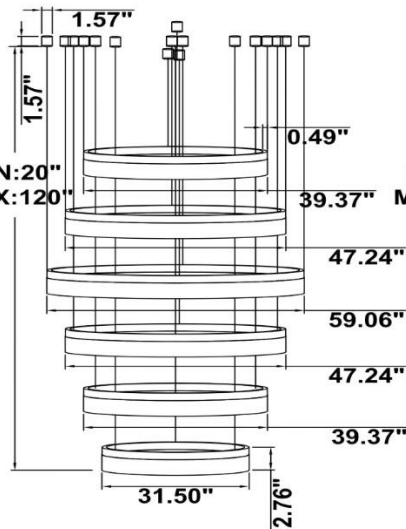
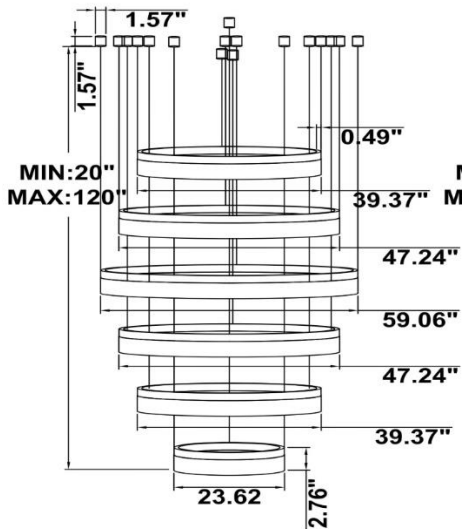


**CIP-D06D Remote mount with canopy, cables fixed directly into the ceiling, direct lighting.**

26.1 lbs



33.2 lbs

42.4 lbs

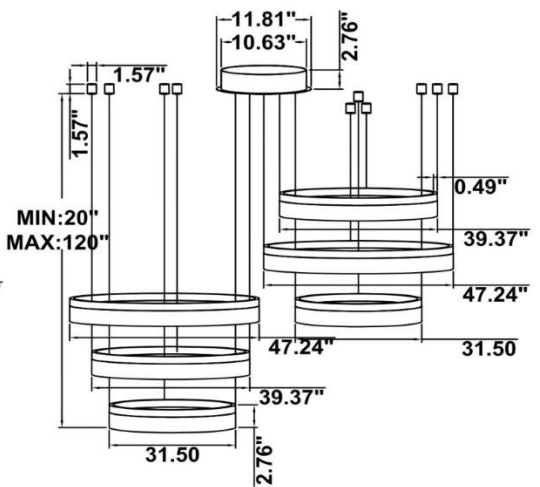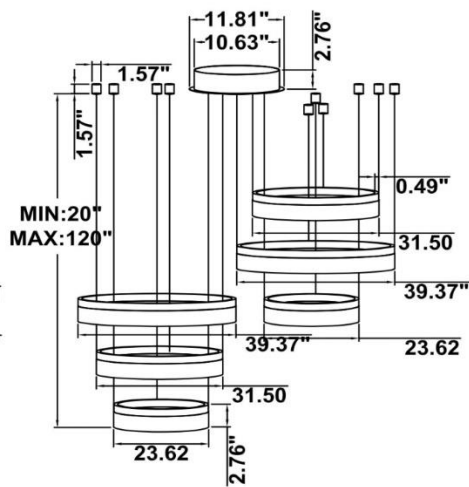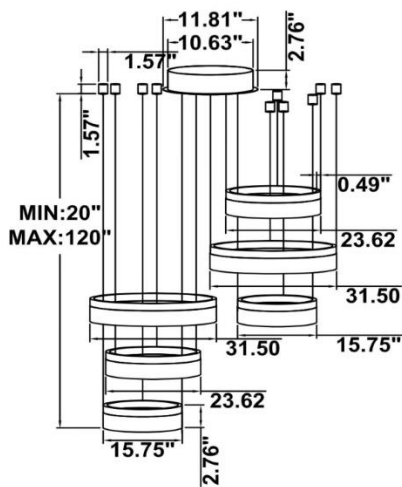





53.2 lbs

66.2 lbs



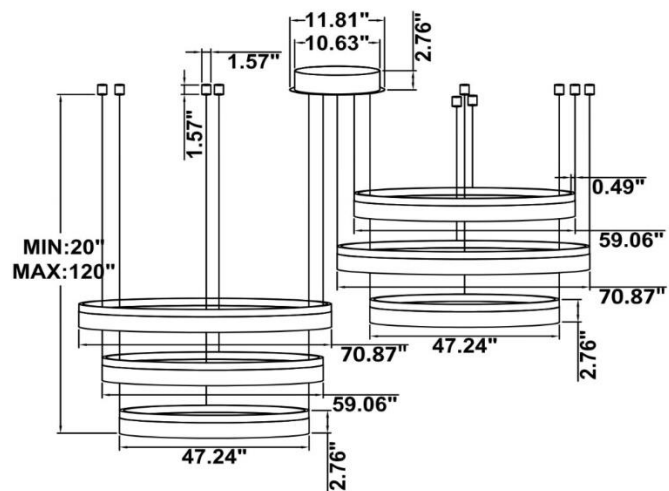
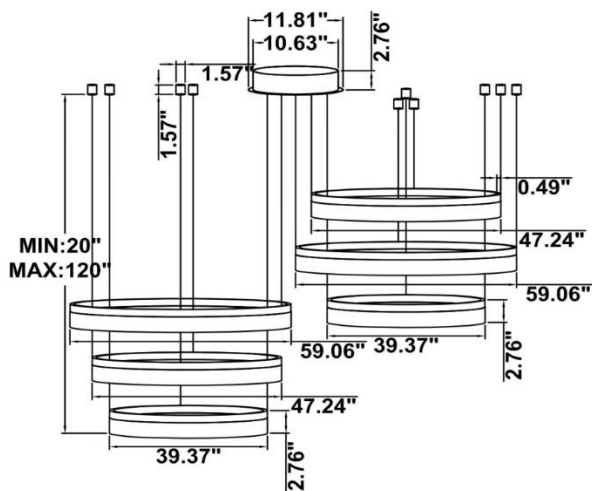


# PHOTOMETRIC: Direct Illumination (Testing for single ring only)





## 15.75" 20W @ 4000K

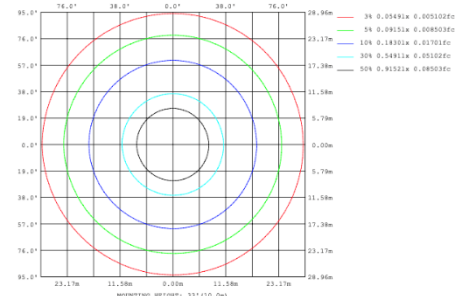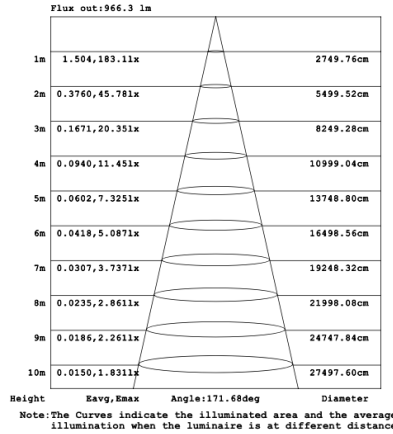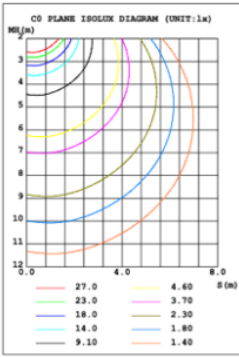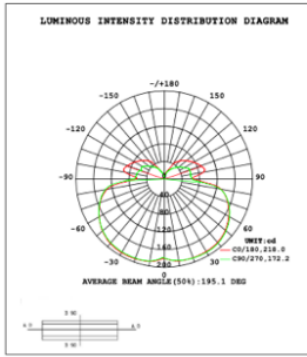


## 23.62" 30W @ 4000K

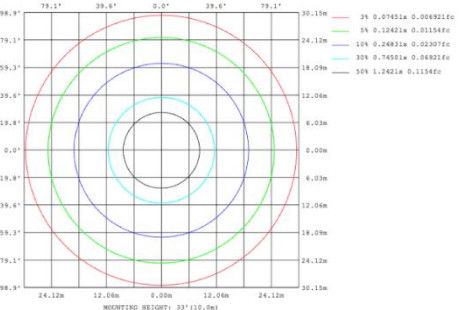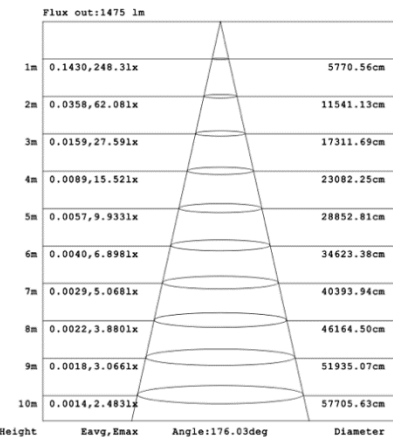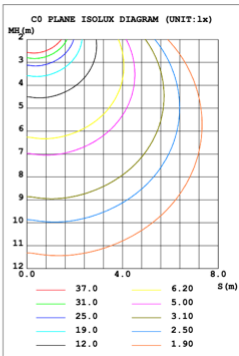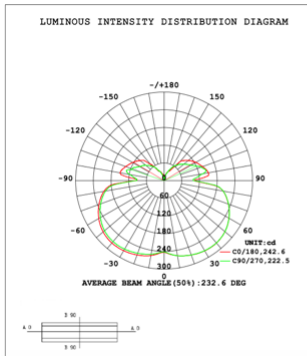


## 31.50" 40W @ 4000K

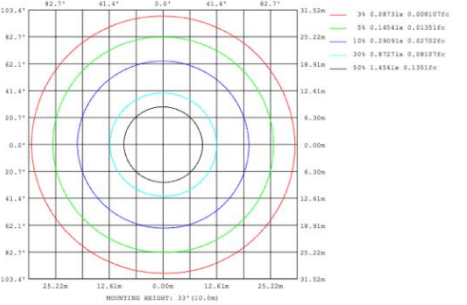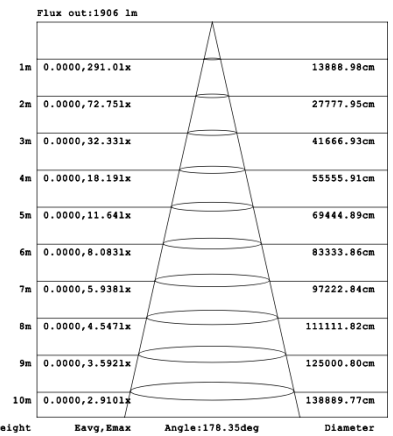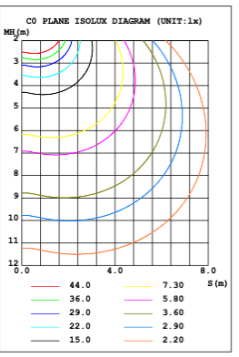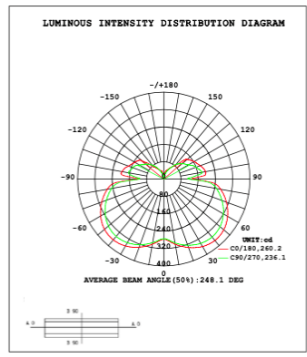


### 39.37" 50W @ 4000K

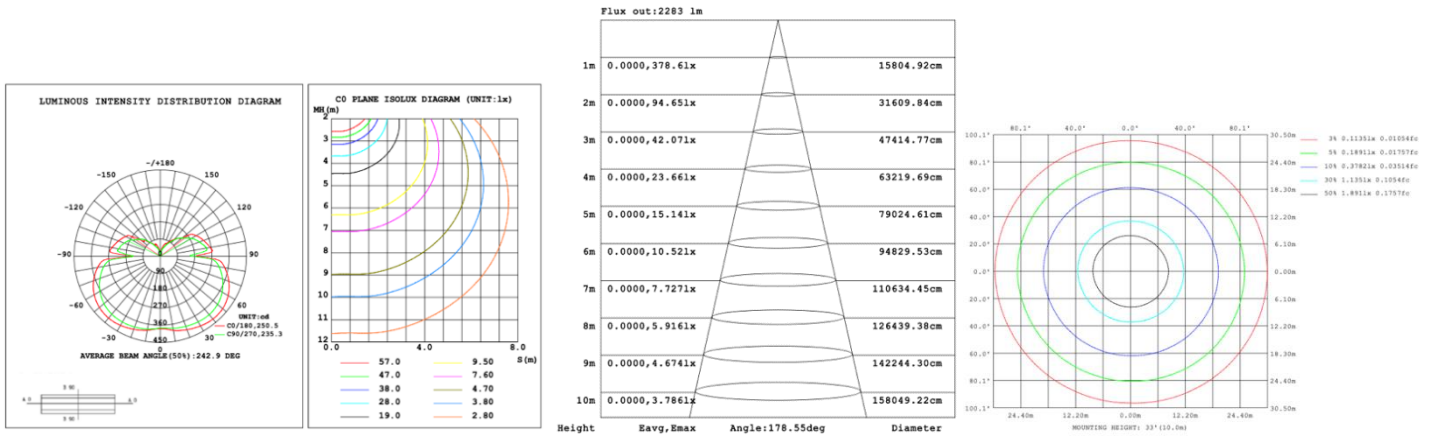



### 47.24" 60W @ 4000K

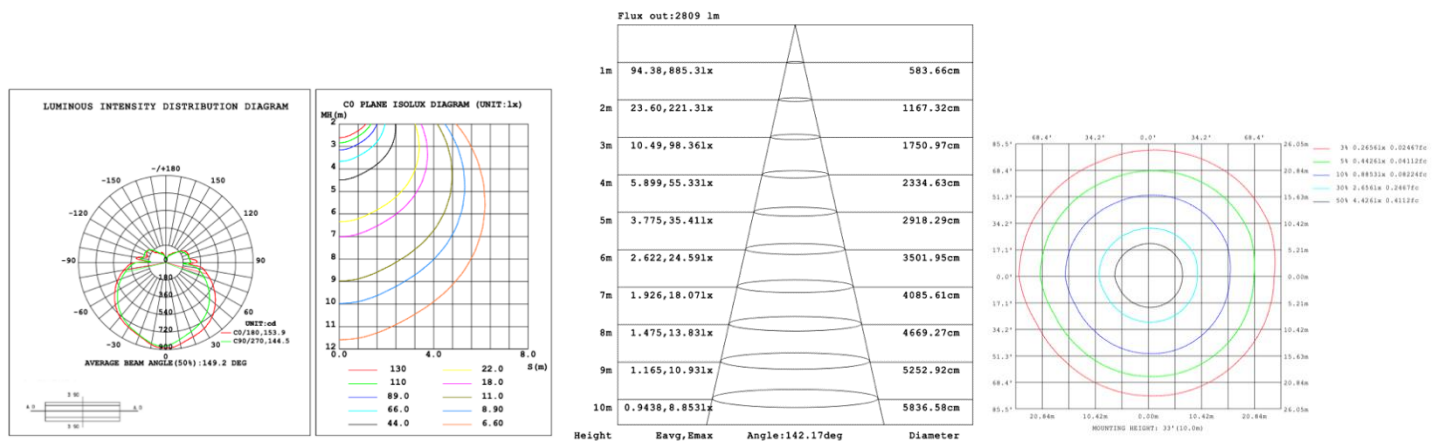

### 59.06" 70W @ 4000K

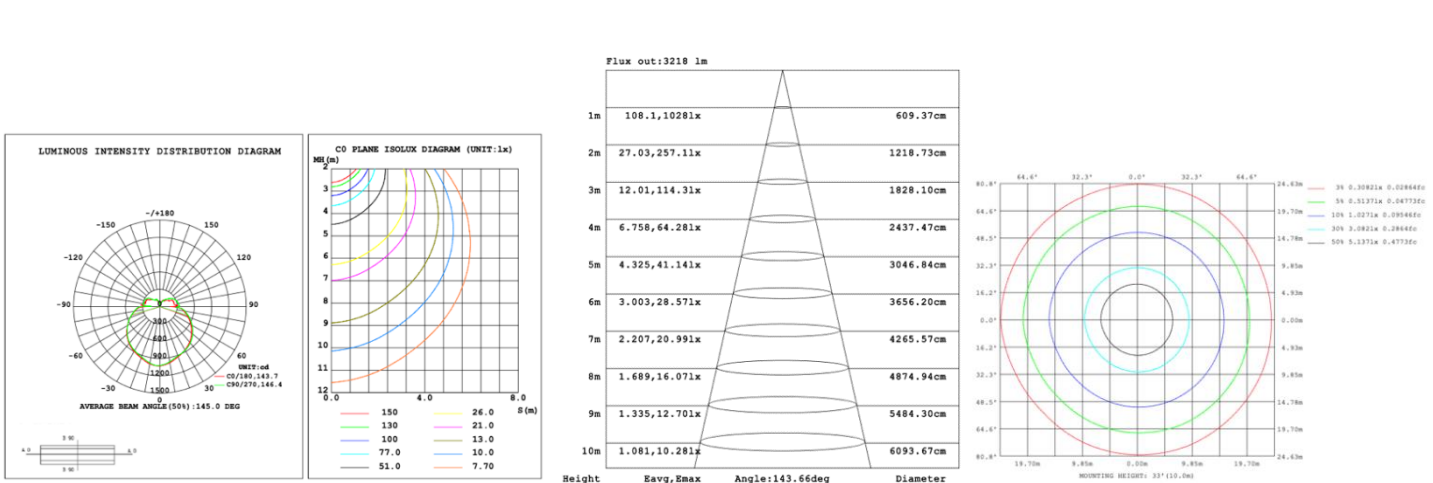

## 70.87" 80W @ 4000K

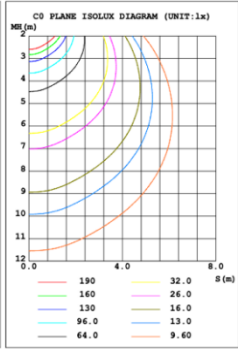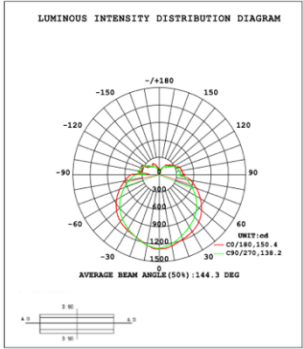

Flux out: 3776 lm

Height	Eavg, Emax	Angle: 137.34deg	Diameter
1m	177.1, 1280lx		512.17cm
2m	44.28, 319.91lx		1024.34cm
3m	19.68, 142.21lx		1536.51cm
4m	11.07, 79.97lx		2048.68cm
5m	7.085, 51.18lx		2560.86cm
6m	4.920, 35.54lx		3073.03cm
7m	3.615, 26.11lx		3585.20cm
8m	2.768, 19.99lx		4097.37cm
9m	2.187, 15.80lx		4609.54cm
10m	1.771, 12.80lx		5121.71cm

