

KASPER

LED Mini Wall Pack

A mini wall pack for indoor or outdoor (wet location) use — workshops, warehouses, steel mills, gas stations, toll booths and station platforms. An integrated photocell is standard on every model.

- 10 / 15 / 20W · 1,450 – 2,420 lm · up to 145 lm/W
- Integrated photocell — standard on all models
- 1–10V dimming · CRI 80
- Lumileds LEDs · 75,000 hr rated life
- Die-cast aluminium cooling design, LED Tj < 85°C
- IP65 · wet location



LUMEN OUTPUT 1,450 – 2,420 lm

EFFICACY Up to 145 lm/W

COLOR TEMP / CCT 4000K / 5000K

CRI 80 (Ra)

DISTRIBUTION 108° × 93°

LED SOURCE Lumileds

WATTAGE 10 / 15 / 20W

VOLTAGE AC 120–277V

POWER FACTOR 0.95

DIMMING 1–10V

DRIVER 88% driver efficacy

FINISH Dark Bronze, White, Black, Silver

OPERATING TEMP –22°F to 113°F (storage –40°F to 176°F)

IP / IMPACT IP65

MATERIAL Die-cast aluminum

DIMENSIONS 4.75 × 2.36 × 7.98" (10/15W) · 5.33 × 3.4 × 8.48" (20W)

LIFETIME 75,000 hrs

WARRANTY 5-Year Limited

HOUSING SIZES

The 20W body is larger and shaped differently.



10 / 15
Compact housing
4.75 × 2.36 × 7.98"



20
Larger housing
5.33 × 3.4 × 8.48"

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	FINISH
KASPER	10 10W 15 15W 20 20W	U 120-277V	40 4000K 50 5000K	P Photocell + 1-10V Dimming	DBZ Dark Bronze WH White BK Black SM Silver


Build Your Order Code — example values shown in grey

MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	FINISH
KASPER	15	U	50	P	DBZ
KASPER	15	U	50	P	DBZ


STANDARD FINISHES



DBZ
Dark Bronze



WH
White




BK
Black



SM
Silver

DIMENSIONS & WEIGHT

WATTAGE	DIMENSIONS (W × D × H)	NET WEIGHT
10 / 15W	4.75 × 2.36 × 7.98"	1.26 lbs
20W	5.33 × 3.4 × 8.48"	3.3 lbs



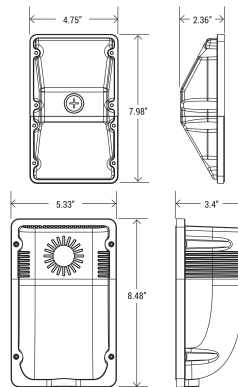


OPTIONS

CONTROLS

P	Integrated photocell — standard on all models
DV	1–10V dimming — standard on all models

PHOTOMETRY

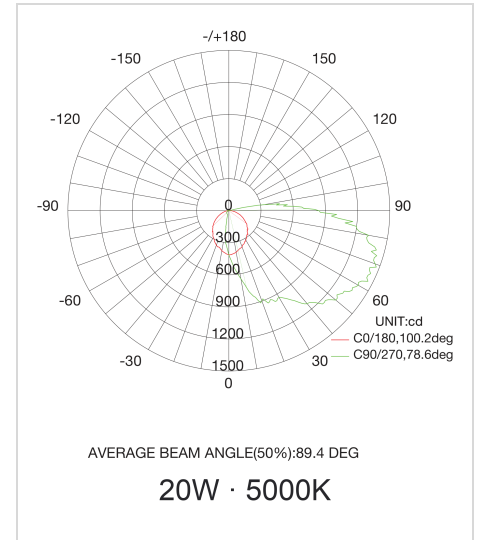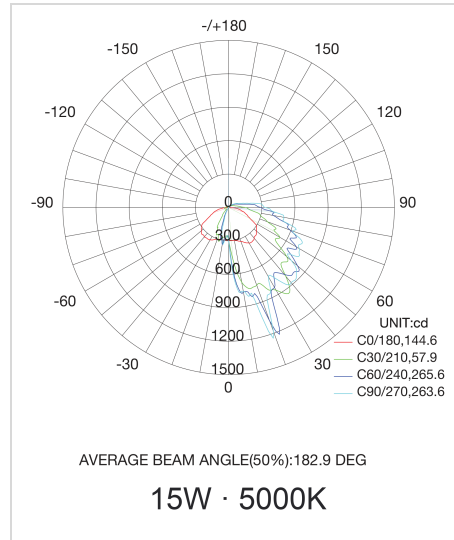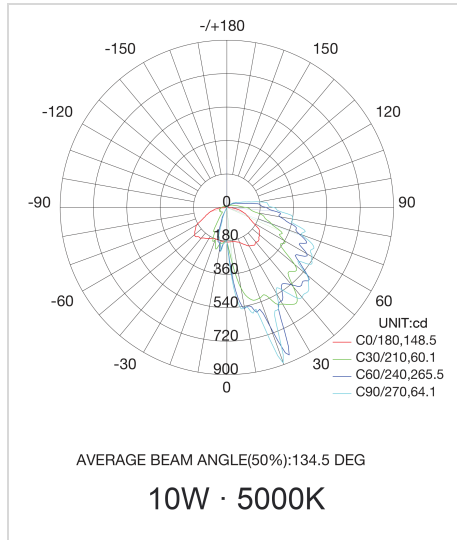

DELIVERED LUMENS

Beam	CCT	10W	15W	20W
108° × 93°	Nominal	1,450	2,100	2,420

Nominal delivered lumens. Photometry shown at 5000K.

DISTRIBUTION 108° × 93° **EFFICACY** Up to 145 lm/W **IES FILE** Available on request