

SLIM FLUSH MOUNT FIXTURE

Installation Instructions

MODEL NUMBERS: SM5/SM7/SM9/SM11/SM13

Contact Information

For support & assistance, please feel free to contact us:

(803) 766-0243 | info@ciplighting.com

IMPORTANT SAFETY INFORMATION

Read this entire manual before attempting installation or operation.

This fixture is designed to operate with either 120–277VAC or 277–480VAC. Installation must follow all local and national electrical codes.

GENERAL SAFETY PRECAUTIONS

- ☐ Read this entire manual before installation.
- ☐ Installation must follow national and local electrical codes.
- ☐ Only qualified electricians should perform installation or maintenance.
- ☐ Disconnect power at the breaker before installing.
- ☐ Use approved connectors such as wire nuts.
- ☐ Ground the fixture properly.
- ☐ Do not install in wet locations unless rated for such use.
- ☐ Allow the fixture to cool before handling.

FCC COMPLIANCE NOTICE

- ☐ This device complies with Part 15 of the FCC Rules. Operation is subject to:
 - This device may not cause harmful interference.
 - This device must accept any interference received.
- Unauthorized modifications may void user authority to operate the equipment.

CAUTION

- ☐ Do not test the LED light using a portable generator.
- ☐ Follow all local, regional, and national regulations.
- ☐ Do not install during rain or in wet conditions to prevent shock or damage.
- ☐ Use gloves during installation to avoid injury.
- ☐ In case of smoke, fire, or unusual odor, shut off power immediately and contact a qualified technician.
- ☐ This fixture is suitable for outdoor installations.

(803) 766-0243 | info@ciplighting.com



SLIM FLUSH MOUNT FIXTURE

Installation Instructions

PRODUCT FUNCTIONALITY & WIRING

- **Voltage Input:** 120V AC
- **Dimming:** TRIAC compatible
- **Installation Type:** Surface mount / flush mount
- **Mounting Base:** Junction box (standard size)

☐ Wire Connections:


- **Black (Line):** Connect to power supply hot/live
- **White (Neutral):** Connect to power supply neutral
- **Green (Ground):** Connect to ground wire in junction box

INSTALLATION STEPS

NOTE: Ensure power is turned off at the breaker panel before beginning installation.

STEP 1: POWER OFF

- ☐ Switch off power at the breaker panel.




STEP 2: FIXTURE PREPARATION

- Open the fixture by carefully removing the lens.
- Unscrew and remove the mounting plate from the fixture body.


Black — L
White — N
copper — G

Junction Box




STEP 3: MOUNTING PLATE INSTALLATION

- Align and attach the mounting plate to the junction box using the included screws.
- Ensure the plate is secured flush against the ceiling.

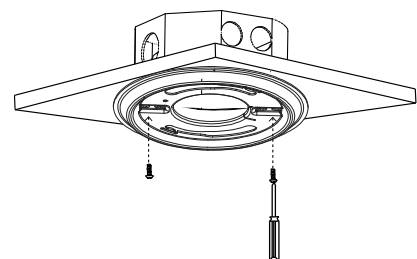

STEP 4: WIRING CONNECTIONS

- ☐ Pull the supply wires through the center opening of the mounting plate.
- ☐ Connect fixture wires to the power supply wires:
- Black to Live (L)
 - White to Neutral (N)
 - Green to Ground (G)
- ☐ Secure all connections with wire nuts and carefully push wires into the box.

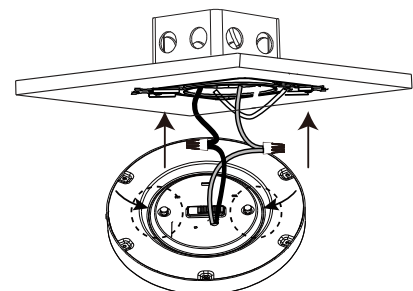


SLIM FLUSH MOUNT FIXTURE

Installation Instructions


STEP 5: FIXTURE INSTALLATION

- Align the fixture base with the mounting plate.
- Secure the fixture using the provided side screws, tightening until flush.

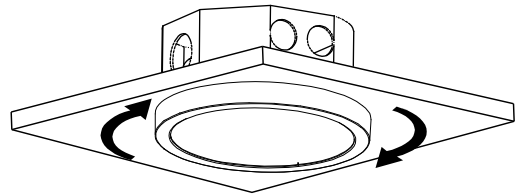

STEP 6: COMPLETE ASSEMBLY

- Reinstall the lens by snapping or rotating it into place.
- Confirm that the fixture is tightly fitted and flush with the ceiling.



POWER ON AND TEST

- Restore power at the circuit breaker.
- Turn on the switch and verify that the light operates correctly.

USAGE, CARE & MAINTENANCE

- ☐ Designed for indoor use in dry or damp environments.
- ☐ Do not use in wet environments unless otherwise specified.
- ☐ Clean with a soft, dry cloth. Avoid using abrasive materials.
- ☐ Periodically check fixture integrity and wiring.
- ☐ Only use manufacturer-approved replacement parts.

NOTE: Always disconnect power before performing maintenance.

SLIM FLUSH MOUNT FIXTURE

Installation Instructions

(803) 766-0243
info@ciplighting.com

RETAIN THIS MANUAL FOR FUTURE USE