

## INTRODUCTION

### FEATURE

- Uniform Linear Lighting
- Long Lifespan Design > 50,000Hours
- Working Temperature: -20°C~40°C

### MAIN MATERIAL

- LED BRAND: GUBO
- LED Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Diffuser: Frosted PC Diffuser

### INSTALLATION

- W20 Magnetic Track Slotted
- Suitable for Interior Lighting

### STANDARD

- Designed and Manufactured to Comply with CE/RoHS/EMF/TUV/SAA/Erp/cETL/FCC
- IP20 Protection, Class III Electric


### OPTION

- LED CCT: 1,800K~10,000K/R/G/B/Y
- Custom Housing Finished Color:

**MATT WHITE**  
[HMWT]

**MATT BLACK**  
[HMBK]


## W20 MAGNETIC LINEAR DOWNLIGHT



### CASE STUDY:



### DIMENSION: [UNIT: MM]

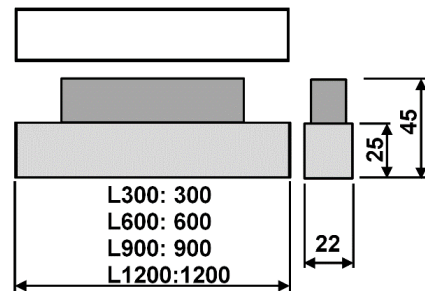

MODEL	POWER [W]	LED TYPE	GCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	REMOTE CONTROL	INPUT [V]
GTR4421C-L300	10W	10x2W SMD3030	G2700K	RA90	800	>0.5	BDF: 120°	[CDP]:PWM(1%) [REMOTE DRIVER] [CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDZ]:ZIGBEE(1%) [CRF]:2.4GRF(1%)	DC24V [DC48V] [REMOTE DRIVER] AC220~240V [AC100~240V] [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	900				
			G3500K	RA90	900				
			G4000K	RA90	950				
			G5000K	RA90	950				
			G6000K	RA90	900				
			H2700K	RA97	650				
			H3000K	RA97	700				
			H3500K	RA97	700				
			H4000K	RA97	750				
			H5000K	RA97	750				
			H6000K	RA97	700				
		2C@10W	10TGW	G2700K	G6000K	RA90	650	>0.5	
GTR4421C-L600	20W	20x2W SMD3030	G2700K	RA90	1600	>0.5	BDF: 120°	[CDP]:PWM(1%) [REMOTE DRIVER] [CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDZ]:ZIGBEE(1%) [CRF]:2.4GRF(1%)	DC24V [DC48V] [REMOTE DRIVER] AC220~240V [AC100~240V] [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	1800				
			G3500K	RA90	1800				
			G4000K	RA90	1900				
			G5000K	RA90	1900				
			G6000K	RA90	1800				
			H2700K	RA97	1300				
			H3000K	RA97	1400				
			H3500K	RA97	1400				
			H4000K	RA97	1500				
			H5000K	RA97	1500				
			H6000K	RA97	1400				
		2C@20W	20TGW	G2700K	G6000K	RA90	1300	>0.5	
GTR4421C-L900	30W	30x2W SMD3030	G2700K	RA90	2400	>0.5	BDF: 120°	[CDP]:PWM(1%) [REMOTE DRIVER] [CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDZ]:ZIGBEE(1%) [CRF]:2.4GRF(1%)	DC24V [DC48V] [REMOTE DRIVER] AC220~240V [AC100~240V] [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	2700				
			G3500K	RA90	2700				
			G4000K	RA90	2850				
			G5000K	RA90	2850				
			G6000K	RA90	2700				
			H2700K	RA97	1950				
			H3000K	RA97	2100				
			H3500K	RA97	2100				
			H4000K	RA97	2250				
			H5000K	RA97	2250				
			H6000K	RA97	2100				
		2C@30W	30TGW	G2700K	G6000K	RA90	1950	>0.5	
GTR4421C-L1200	40W	40x2W SMD3030	G2700K	RA90	3200	>0.5	BDF: 120°	[CDP]:PWM(1%) [REMOTE DRIVER] [CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDZ]:ZIGBEE(1%) [CRF]:2.4GRF(1%)	DC24V [DC48V] [REMOTE DRIVER] AC220~240V [AC100~240V] [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	3600				
			G3500K	RA90	3600				
			G4000K	RA90	3800				
			G5000K	RA90	3800				
			G6000K	RA90	3600				
			H2700K	RA97	2600				
			H3000K	RA97	2800				
			H3500K	RA97	2800				
			H4000K	RA97	3000				
			H5000K	RA97	3000				
			H6000K	RA97	2800				
		2C@40W	40TGW	G2700K	G6000K	RA90	2600	>0.5	

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.  
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±3.

CIP Lighting

T: 1-803-766-0243 W: [www.ciplighting.com](http://www.ciplighting.com) E: [info@ciplighting.com](mailto:info@ciplighting.com)