



Specifications

Part # CIP-TPG7-(wattage)-(CCT color)-AC100-277V

Note: We try to keep stock: all wattages, 3CCT selectable, AC100-277V, no sensor, 3in tenon

Wattage	30W / 50W / 60W / 80W / 100W / Power Selectable
LED Chip	SMD 3030, Lumileds or Other LED Chips
Driver Brand	SOSEN / ZHIHE/ FAHOLD or Other Brand
CCT	3000K / 4000K / 5000K / 5700K optional , 3CCT Selectable
Light Output	3600lm / 6000lm / 7200lm / 9300lm / 11600lm
Efficacy	110-120 LM/W (Can customize higher LM/W if needed)
AC Input Voltage	100~277V /120-347V / 277-480V
Light Distribution	Type V
Exclusive Feature(1)	Button Photocell Sensor Available
Exclusive Feature(2)	Acrylic Diffuser / PC Diffuser Optional
Exclusive Feature(3)	3CCT / Power Tunable Available
Ambient Temperature	-40°C to +45°C(-40°F to +113°F)
Total Harmonic Distortion (THD)	<20%
Lifetime	50,000H
IP Rating	IP65
Warranty	5 years

Features



CCT Select



Power Select



Photocell sensor



ADC12 Die casting


Button Photocell Sensor (Optional)




CCT Select & Power Select



Dimension

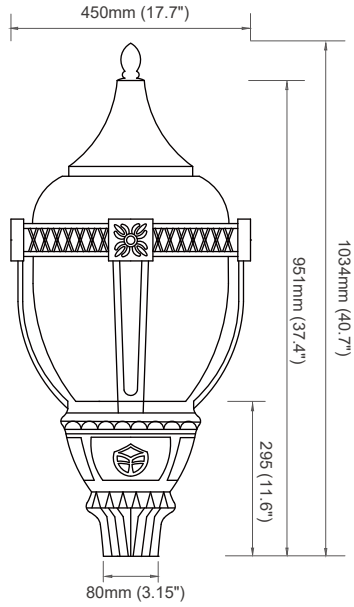

100W-60W

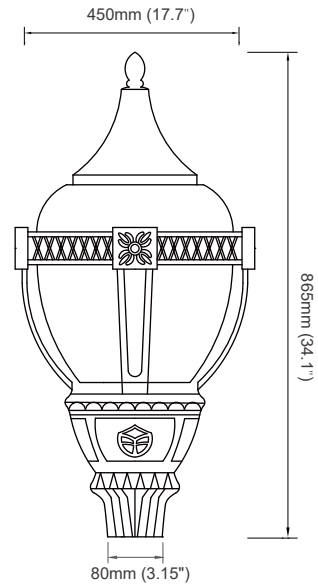

60W-30W

Applications




Street / Walkway




Community

Light Distribution

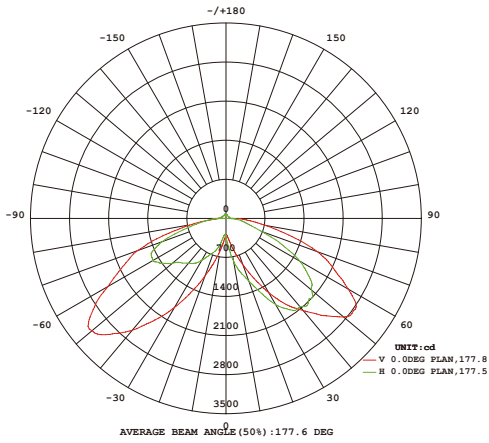

Installation

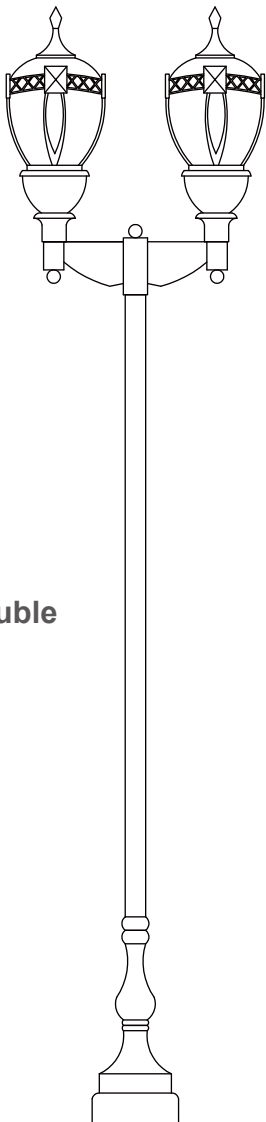


Double



Single

Packaging information

Wattage	Product Dimension (mm/in)	Carton Box Dimension (mm/in)	N.W (Kg/lb) (1pc)	G.W (Kg/lb) (1ctn)	qty/ctn
100W-60W	450 x 450 x 951 mm 17.72 x 17.72 x 37.44 in	540 x 540 x 980 mm 21.26 x 21.26 x 38.58 in	8.5Kg(18.74lbs)	11.8Kg(26.00lbs)	1 PCS
60W-30W	450 x 450 x 865 mm 17.72 x 17.72 x 37.44 in	540 x 540 x 895 mm 20.87 x 20.87 x 34.10 in	6.2Kg(13.67lbs)	9.0Kg(19.80lbs)	1 PCS

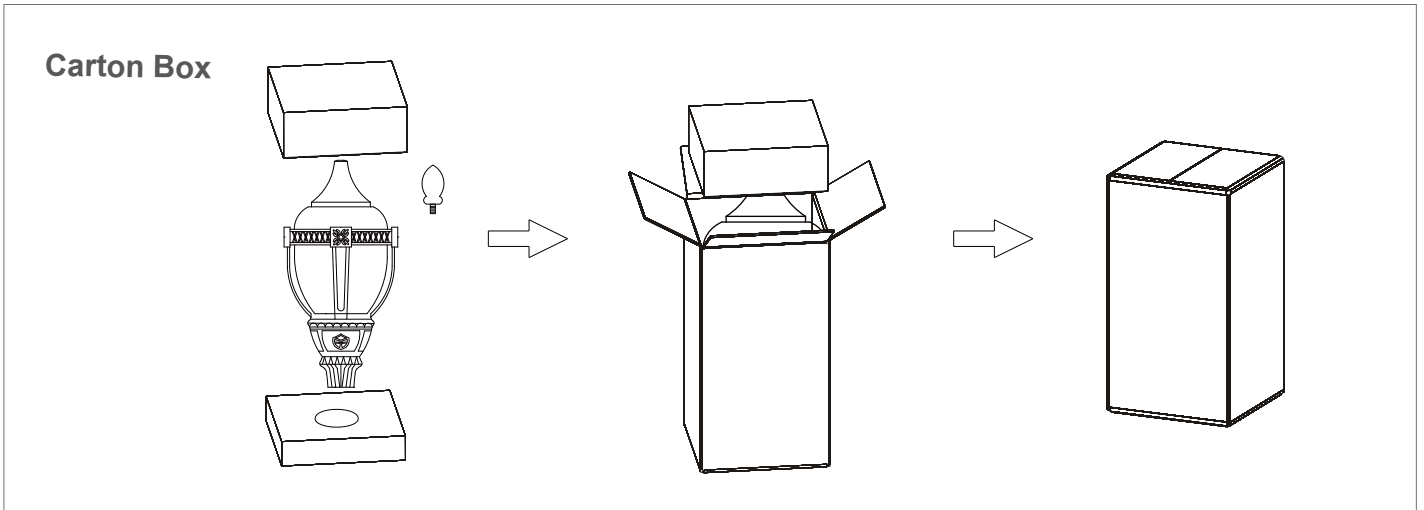

CIP Lighting

803-766-0243

info@cipighting.com

www.cipighting.com