

NESTOR

Remote Emergency Head

A remote emergency lamp head for use with emergency units equipped with remote capacity. Available in single- or dual-head configurations for interior or exterior applications. Features adjustable heads and an injection-molded, flame-retardant thermoplastic housing with a durable white finish.

- Single or double adjustable lamp head
- 100 lumens per head — 1.2W single, 2.4W double
- Interior and exterior rated models
- CRI greater than 70
- Wired to the host emergency unit — no battery of its own
- Injection-molded flame-retardant high-impact thermoplastic housing
- Long-lasting white finish



cULus

FCC

CEC

DOE

RoHS

LUMEN OUTPUT	100 lm single head · 200 lm double head
CRI	70+ (Ra)
LED SOURCE	Ultra-bright white LED
WATTAGE	1.2W single head · 2.4W double head

VOLTAGE	3.6 / 9.6V DC head supply — host unit 120 / 277V AC
FINISH	White
MATERIAL	Injection-molded flame-retardant high-impact thermoplastic
WARRANTY	5-Year electrical parts & housing

AVAILABLE MODELS

 1-IN Interior · 1 head	 2-IN Interior · 2 heads	 1-EX Exterior · 1 head	 2-EX Exterior · 2 heads
--	---	--	---

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	HEADS	LOCATION	FINISH
NESTOR	1 1 head 2 2 heads	IN Interior EX Exterior	WH White

Build Your Order Code — example values shown in grey

MODEL	HEADS	LOCATION	FINISH
NESTOR	1	IN	WH

DIMENSIONS

MODEL	WIDTH	HEIGHT	DEPTH
NESTOR-1-IN	3.74" (95 mm)	4.25" (108 mm)	3.14" (80 mm)
NESTOR-2-IN	6.69" (170 mm)	4.25" (108 mm)	2.98" (76 mm)
NESTOR-1-EX	3.74" (95 mm)	6.35" (161 mm)	2.23" (57 mm)
NESTOR-2-EX	4.52" (115 mm)	—	—

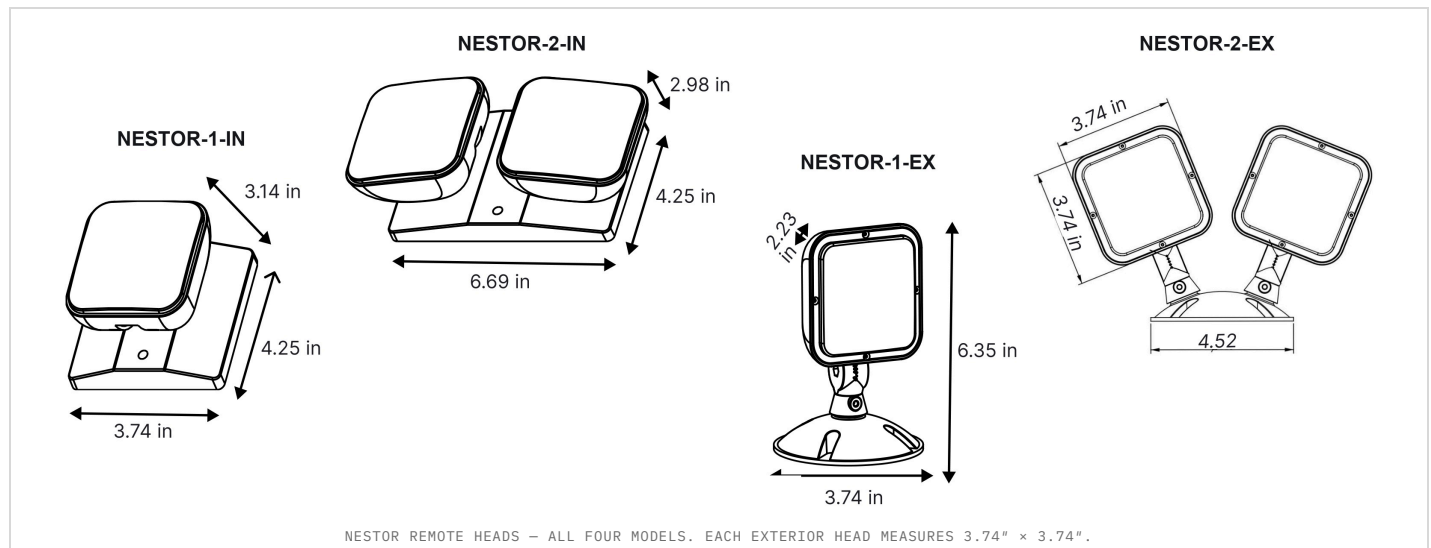

ELECTRICAL PERFORMANCE

MODEL	POWER	LUMENS	VOLTAGE	CRI
NESTOR-1	1.2W	100 lm	3.6 / 9.6V DC	70+
NESTOR-2	2.4W	200 lm	3.6 / 9.6V DC	70+

Values as published by the manufacturer. Contact CIP for custom configurations.