

ORION

Running Man Exit Sign

A pictogram exit sign with three interchangeable running-man legends for field-selectable direction and configurable single- or double-face installation. An integrated nickel-cadmium battery provides 120 minutes of emergency operation. Features a high-impact, UV- and flame-rated thermoplastic housing with ceiling, wall, or side mounting.

- Three running-man pictogram legends supplied as standard for directional selection
- Single or double face, configured on site with the supplied legends
- 120 / 347VAC input at 4W – 1.5W in emergency
- Integral 3.6V 900mAh nickel-cadmium battery, 120 minutes emergency operation
- Maximum 24 hours for full charge time
- LED source rated 75,000 hours
- High-impact UV flame-rated thermoplastic housing
- Universal mounting – ceiling, wall or side · damp location rated



cULus

RoHS

Damp Location



LED SOURCE	LED — green running-man pictogram
WATTAGE	4W · 1.5W in emergency
VOLTAGE	120 / 347V AC dual voltage
BATTERY	3.6V 900mAh nickel-cadmium, integral
EMERGENCY RUNTIME	120 minutes
RECHARGE TIME	24 hours maximum

FINISH	White
MATERIAL	High-impact UV flame-rated thermoplastic
MOUNTING	Universal — ceiling, wall or side mount
DIMENSIONS	13.60" L × 9.06" H × 2.33" W
LIFETIME	75,000 hours
WARRANTY	2 years

SUPPLIED LEGENDS

All three supplied as standard — selected on site



Running man



Left arrow



Right arrow

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL

ORION


Build Your Order Code — example values shown in grey

MODEL

ORION

DIMENSIONS

MODEL	LENGTH	HEIGHT	WIDTH
ORION	13.60" (345 mm)	9.06" (230 mm)	2.33" (59 mm)

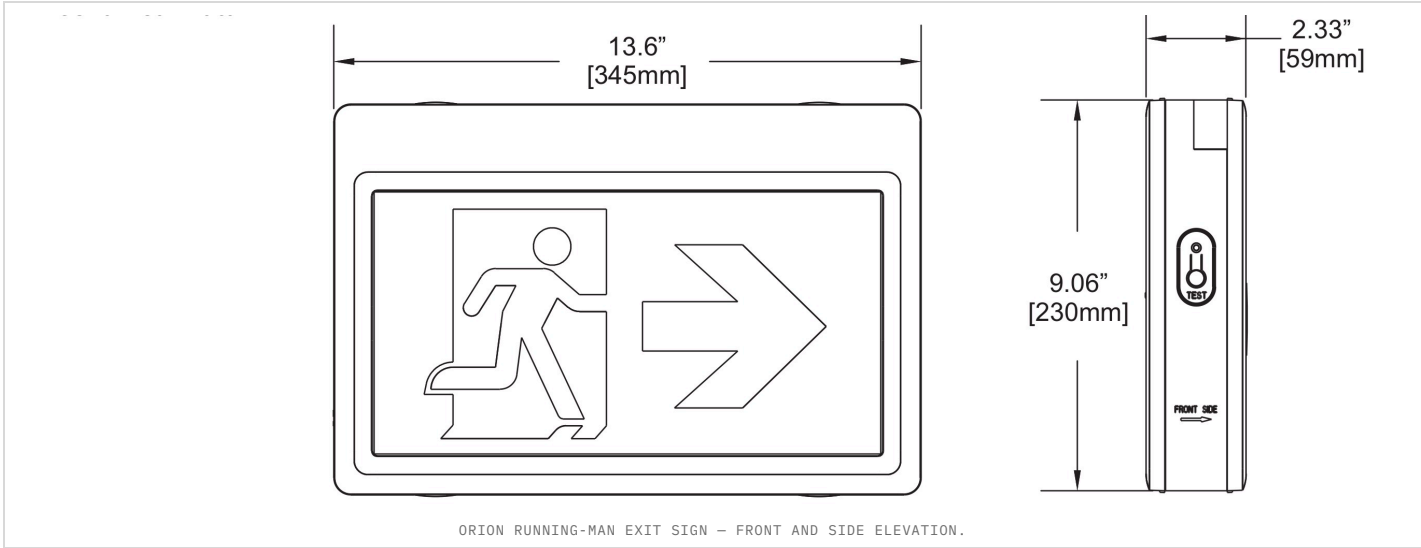

ELECTRICAL & EMERGENCY PERFORMANCE

MODEL	RATED VOLTAGE	INPUT WATT	EM POWER	LED SOURCE	RECHARGE	EMERGENCY RUNTIME
ORION	120 / 347V	4W	1.5W	Green running-man pictogram	24 hrs	120 min

Values as published by the manufacturer. Contact CIP for custom configurations.