


UNDERWATER LED RECESSED LINEAR LIGHT




(A-L195-MA)




(A-L328-MA)

DIMENSION: [UNIT: MM]

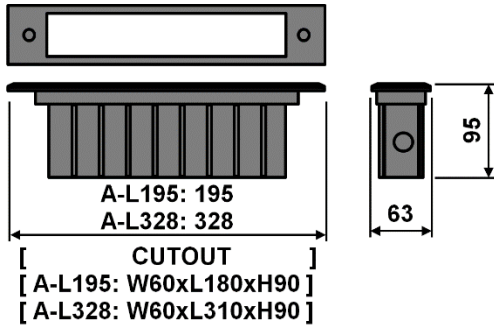


[MY] YOKE MOUNT



[BDF] FROSTED



[SLEEVE]



INTRODUCTION

FEATURE

Advanced Patent LED Technology
Durable Corrosion Resistant Structure
Long Lifespan >50,000hours
Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
Driver Brand: GUBO
Housing: SUS316 Housing
Fittings: Corrosion-resistant Nylon Buried Sleeve
Diffuser: Clear Tempered Glass Diffuser

INSTALLATION

Ground or Wall Recessed
Maximum Diving Depth: 5meters
Fitting: Screwed into Buried Sleeve
Suitable for Underwater Lighting, Like Pool, Fountain

STANDARD


Designed and Manufactured to Comply with CE/RoHS/cETL/SAA.....
IP68 and IK10 Protection, Class III Electric

OPTIONS

LED CCT: 2700K/3500K/4000K/6000K/R/G/B/A
[MA]: Adjustable Mount Bracket
[ACF]: Female Waterproof Connector

NOTES: Cannot Be Operated for Over 5min Out of Water!

CASE STUDY

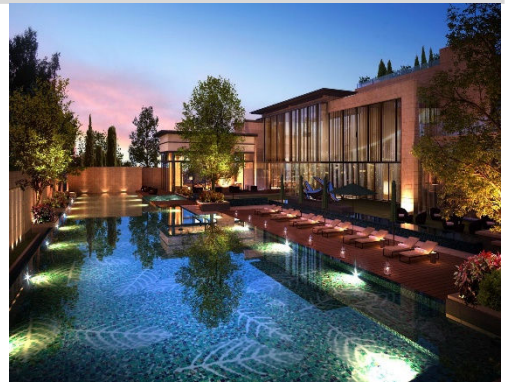

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT [V]
GTG9618A-L195 GTG9618A-L195-MA	6W	6x2W SMD3030	G2700K	RA90	460	>0.5	[Symmetric] BL10D:10° BL15D:15° BL25D:25° BL30D:30° BL45D:45° BL60D:60° BL90D:90° BL120D:120°	[CDP]: PWM(1%)	CV DC24V [CV DC12V]
			G3000K	RA90	500				
			G3500K	RA90	500				
			G4000K	RA90	530				
			G5000K	RA90	530				
			G6000K	RA90	530				
	2C@6W	6TW	G2700K	G6000K	RA90	300	>0.5		
3C@6W	6RGB	620nm	520nm	465nm	/	300	>0.5		
4C@6W	6RGBW	620nm	520nm	465nm	2700K	/	300	>0.5	
4C@6W	6RGBA	620nm	520nm	465nm	590nm	/	300	>0.5	
GTG9618A-L328 GTG9618A-L328-MA	12W	12x2W SMD3030	G2700K	RA90	770	>0.7	[Oval] BLV10x45° BLV10x60° BLV20x60° BLV30x70°	[Following by Remote Driver] [CDT]: TRIAC(10%) [CDV]: 0/1~10V(8%) [CDV0]: 0~10V(1%) [CDV1]: 1~10V(10%) [CDX]: DMX512(1%) [CDA]: DALI(1%)	
			G3000K	RA90	830				
			G3500K	RA90	830				
			G4000K	RA90	890				
			G5000K	RA90	890				
			G6000K	RA90	890				
	2C@12W	12TW	G2700K	G6000K	RA90	520	>0.5		
3C@12W	12RGB	620nm	520nm	465nm	/	520	>0.5		
4C@12W	12RGBW	620nm	520nm	465nm	2700K	/	520	>0.5	
4C@12W	12RGBA	620nm	520nm	465nm	590nm	/	520	>0.5	

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.