



Wall mounted Series
(Under-cabinet, Mirror light, Over bed light)




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
CIP-LED6-BPC	6W	304x30x61	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
CIP-LED10-BPC	10W	569x30x61		4000K				
CIP-LED15-BPC	15W	894x30x61	120-347V	5000K	CRI>90	140Lm/W		
CIP-LED20-BPC	20W	1180x30x61	220-240V	6500K				
CIP-LED24-BPC	25W	1466x30x61						
CIP-LED30-BPC	30W	1466x30x61						

Wall mounted Series
(Under-cabinet,Mirror light,Over bed light)



FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- USB socket
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
CIP-LED6-BPC(2)	6W	348x69x92	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
CIP-LED10-BPC(2)	10W	619x69x92						
CIP-LED15-BPC(2)	15W	939x69x92						
CIP-LED20-BPC(2)	20W	1224x69x92						
CIP-LED24-BPC(2)	25W	1510x69x92						
CIP-LED30-BPC(2)	30W	1510x69x92						
CIP-LED0606-BPC(2)	6W+6W	348x69x92						
CIP-LED1010-BPC(2)	10W+10W	614x69x92						
CIP-LED1515-BPC(2)	15W+15W	939x69x92						
CIP-LED2020-BPC(2)	20W+20W	1224x69x92						
CIP-LED2424-BPC(2)	25W+25W	1510x69x92						
CIP-LED3030-BPC(2)	30W+30W	1510x69x92						

Wall mounted Series
(Under-cabinet,Mirror light,Over bed light)




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- Color:White,Silver,Black

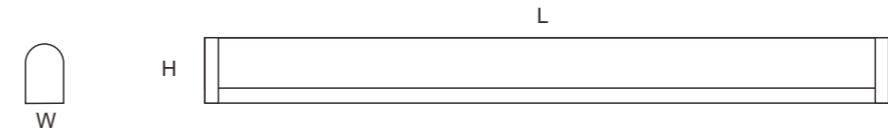

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
CIP-LED6-BPC(3)	6W	349x52x89	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
CIP-LED10-BPC(3)	10W	608x52x89						
CIP-LED15-BPC(3)	15W	940x52x89						
CIP-LED20-BPC(3)	20W	1225x52x89						
CIP-LED24-BPC(3)	25W	1511x52x89						
CIP-LED30-BPC(3)	30W	1511x52x89						