



CIP-AS: (1-6 Tier Options)

PRODUCT DESCRIPTION

Introducing the Circular Pendants, crafted from extruded aluminum with glare-free acrylic rings, offering direct and indirect lighting.

Available in sizes from 15.75" to 70.87", mix and match for stunning compositions. With tunable white and RGBW options, and over 6500 powder-coated colors, customize your ambiance effortlessly.

Shipped assembled for convenience.

*CIP-U01A



CIP-U01B



CIP-U01C



CIP-U01D



CIP-U01E



FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- Fixture delivered lumens per watt ratio up to 120 LPW, 60 LPW direct, 60 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.



PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch







MODEL INFORMATION:

Example: CIP-AS-U01A-20W-S-B

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable	
*CIP-AS-U01A CIP-AS-U01B CIP-AS-U01C CIP-AS-U01D CIP-AS-U01E	*20W=15.75"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default)	
	30W=23.62"			S=Platinum Silver	5'=5 foot 60"	
	40W = 31.50"		A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	C=Dali	W=Gloss White	15'=15 foot 180"
	50W = 39.37"			D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	O=Oil Rubbed Bronze	20'=20 foot 240"
		60W = 47.24"		Z=ZigBee(for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.)		25'=25 foot 300"
	70W = 59.06"	T=3K-4K Tunable White control by remote/wall control	L=ELV / Triac dimming		30'=30 foot 360"	
	80W = 70.87"	R3= RGB+3000K				
R4=RGB+4000K						
<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</p>						


STANDARD COLOR FINISHES



LUMEN OUTPUT

Model Number	Size	Wattage	Kelvin Temp field Selectable \pm 500K	Delivered Lumen \pm 10%
CIP-AS-U01A/B/C/D/E	15.75"	20W	3000K/3500K/4000K or 2700K/3500K/4000K	2400 lm
	23.62"	30W	3000K/3500K/4000K or 2700K/3500K/4000K	3600 lm
	31.50"	40W	3000K/3500K/4000K or 2700K/3500K/4000K	4800 lm
	39.37"	50W	3000K/3500K/4000K or 2700K/3500K/4000K	6000 lm
	47.24"	60W	3000K/3500K/4000K or 2700K/3500K/4000K	7200 lm
	59.06"	70W	3000K/3500K/4000K or 2700K/3500K/4000K	8400 lm
	70.87"	80W	3000K/3500K/4000K or 2700K/3500K/4000K	9600 lm

EMERGENCY BATTERY OPTIONS

PICTURE	MODEL NUMBER	DESCRIPTION
	-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL

Get Smart




Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

Tiers: Other Tier options available (1-6)




PHOTOMETRIC: Testing for Single ring and direct Illumination


15.75" 20W @ 4000K

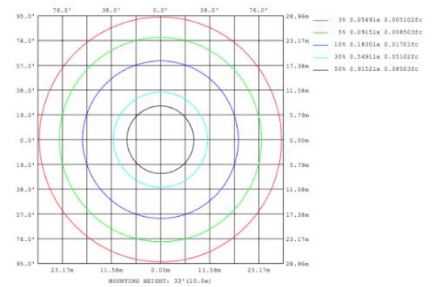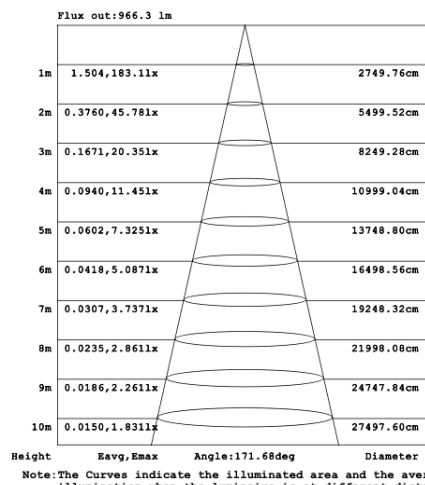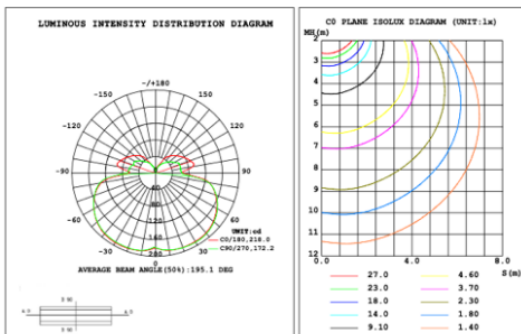


23.62" 30W @ 4000K

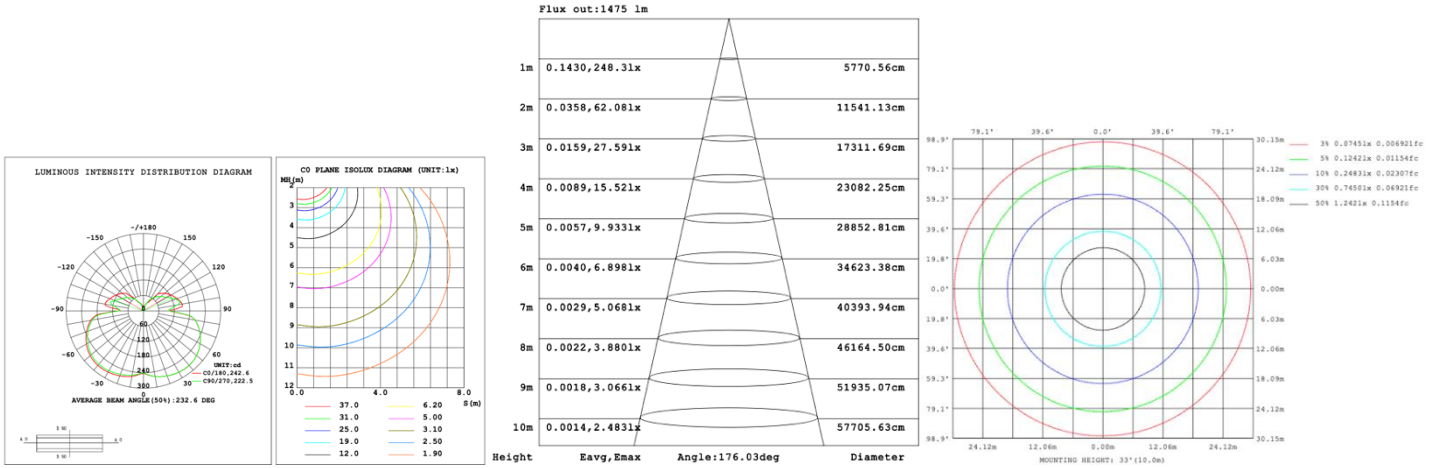





31.50" 40W @ 4000K

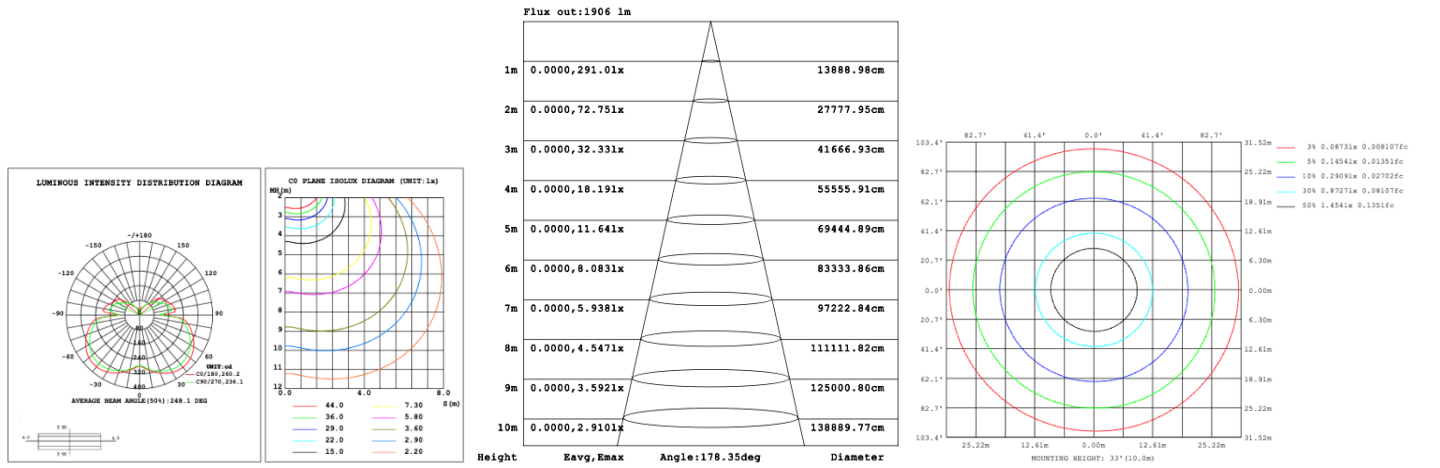





39.37" 50W @ 4000K

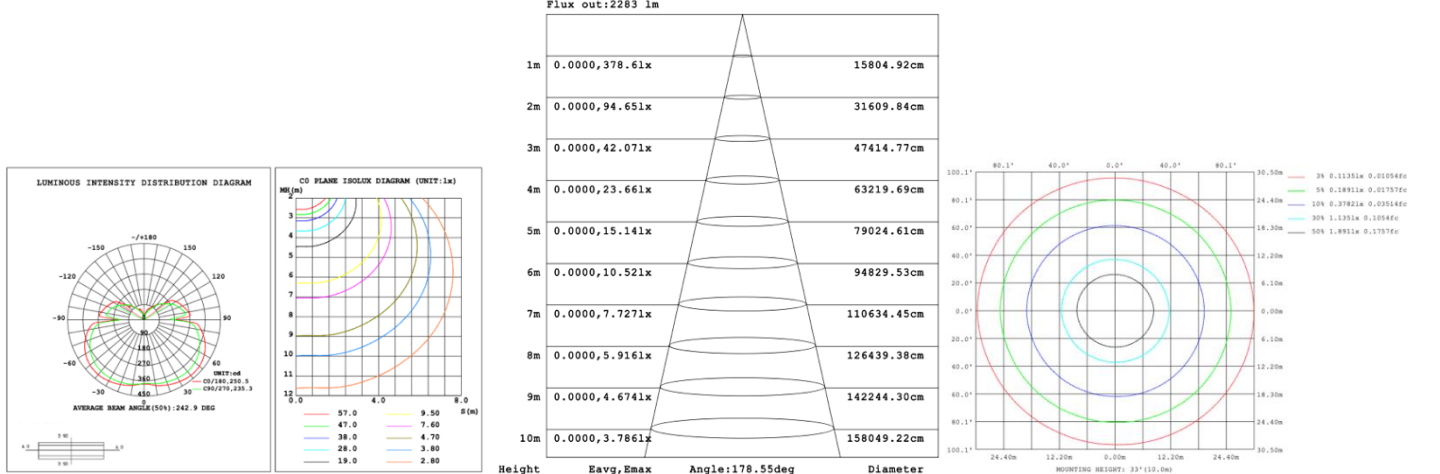

47.24" 60W @ 4000K

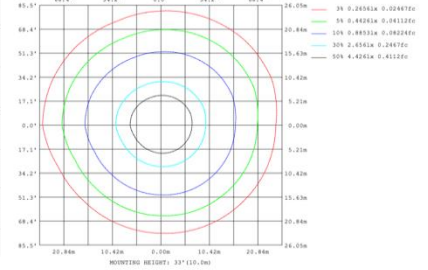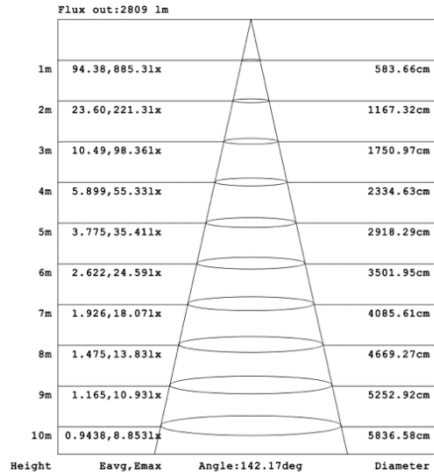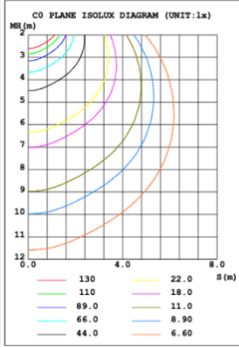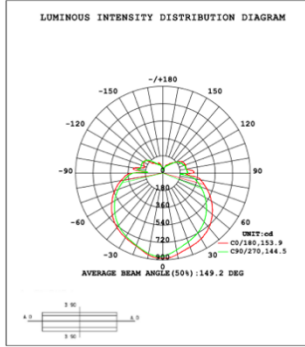

59.06" 70W @ 4000K

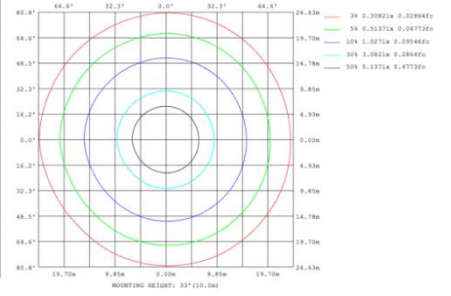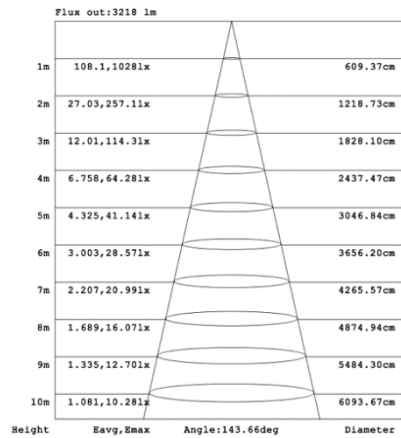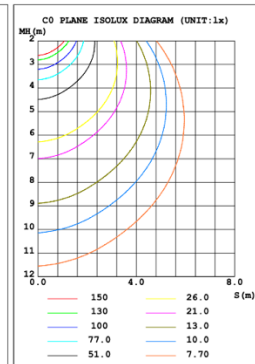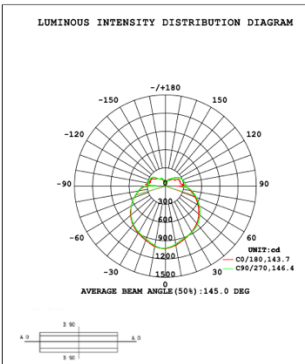

70.87" 80W @ 4000K

