

# CIP LIGHTING

A division of Charlotte International Partners Inc.  
1740 First Baxter Crossing, Fort Mill SC 29708 USA  
1-803-396-1439 info@ciplighting.com

# K3

## LED Linear High Bay Light

IP44

SEVEN - YEAR

# 7

WARRANTY

# 175LM/W




# VEET CB IK10

# CIP LIGHTING

A division of Charlotte International Partners Inc.  
1740 First Baxter Crossing, Fort Mill SC 29708 USA  
1-803-396-1439 info@ciplighting.com

## HIGH LUMEN LINEAR LED HIGH BAY




### Product Description:

Acrylic housing, more light and elegant

Two side cover avoid light leaking

Various beam angle 30°/60°/90° options, and asymmetric 25°/30°

Frosted lens design with soft light



kWh/1000h




# Features

Powered by



Sandblasting oxidation treatment on heat sink makes fixture body with better abrasion performance and corrosion resistance

PC transparent/ frosted cover, the overall appearance looks lighter and thinner

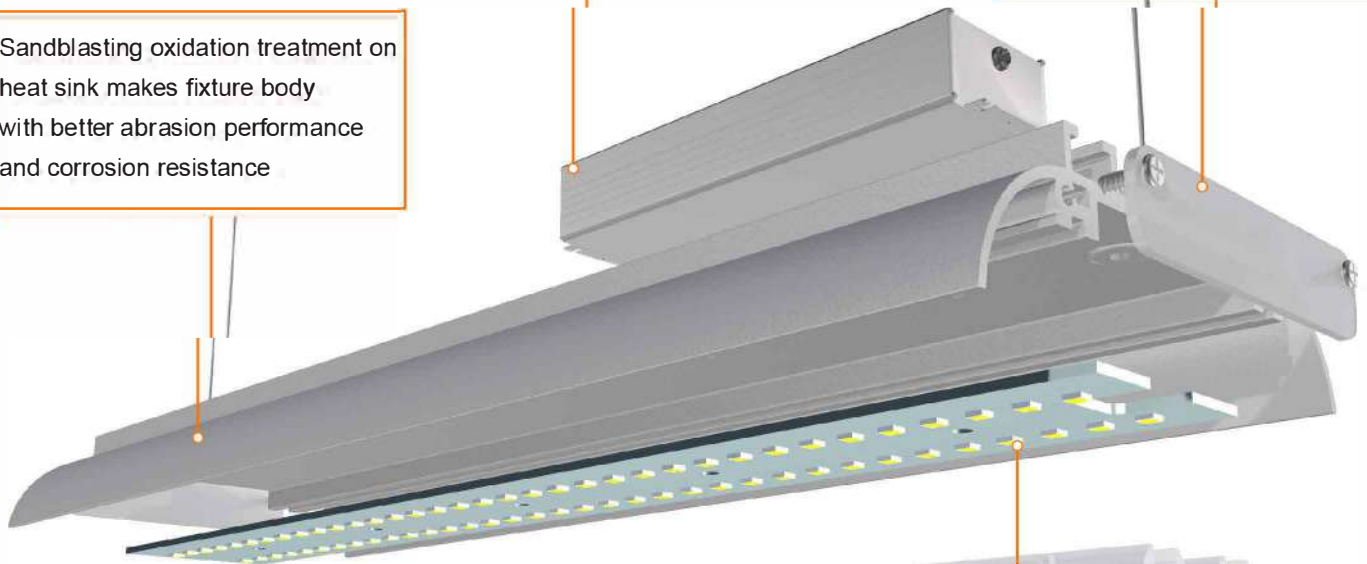

Frosted Lens design with soft light  
Various beam angle of 30°/60°/90° options,  
and Asymmetric 25°/30°

High lumen 175LM/W  
3030 SMD Led Chip





## K3 LED Linear High Bay Light

# 30W


### SPECIFICATIONS



### Technical Data

Model Number	HS-HB30W-K3
Power	30W
Luminous Efficacy	175lm/W
Lumen Output	5250lm
LED Quantity	49pcs
Dimension	298*100*26.5mm
CCT	3000K 4000K 5000K 6000K (Custom Option)
CRI	>80Ra
System Efficiency	≥90%


### Product Dimensions

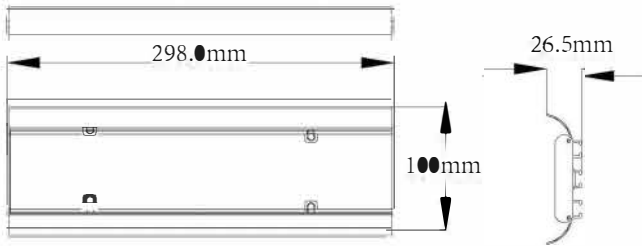

### Electrical Details

Input Voltage	AC100-277V/347V/480V
Power Frequency	50-60Hz
Output Voltage	DC36-48V
Power Efficiency	>92%
Power Factor	≥0.95
Total Harmonic Distortion	≤15%
Dimmable	Yes (Optional)


### Photometrics

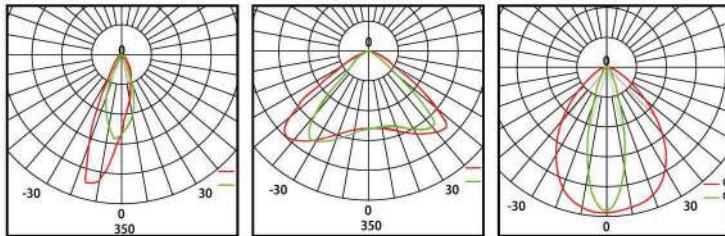

single 25°

double 30°

30°

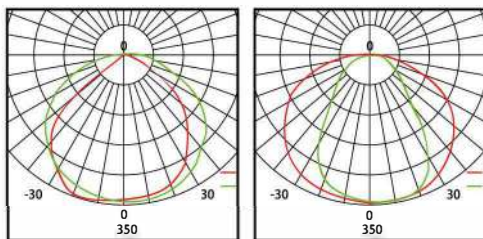

60°

90°

### Other Details

IP Rating	IP44
Lifespan	100,000+ Hours
Storage Temperature	-20°~65°C
Operating Temperature	-20°~55°C
Luminaire Net Weight	1.2KG
Certification	UL, DLC Premium, SAA, TUV, VEET, CB
Color of housing	White(customized)



# CIP LIGHTING

A division of Charlotte International Partners Inc.  
1740 First Baxter Crossing, Fort Mill SC 29708 USA  
1-803-396-1439 info@ciplighting.com

SEVEN - YEAR  
**7**  
WARRANTY



## K3 LED Linear High Bay Light


# 60W

## SPECIFICATIONS

### Technical Data

Model Number	HS-HB60W-K3
Power	60W
Luminous Efficacy	175lm/W
Lumen Output	10500lm
LED Quantity	98pcs
Dimension	593*100*26.5mm
CCT	3000K 4000K 5000K 6000K (Custom Option)
CRI	>80Ra
System Efficiency	≥90%


### Product Dimensions

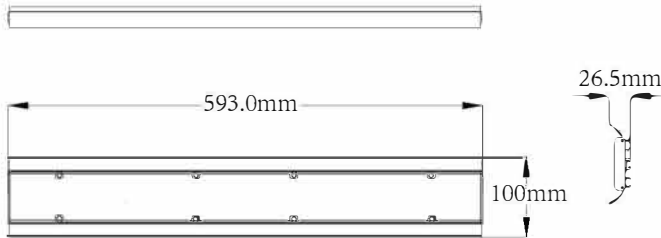

### Electrical Details

Input Voltage	AC100-277V/347V/480V
Power Frequency	50-60Hz
Output Voltage	DC36-48V
Power Efficiency	>92%
Power Factor	≥0.95
Total Harmonic Distortion	≤15%
Dimmable	Yes (Optional)


### Photometrics

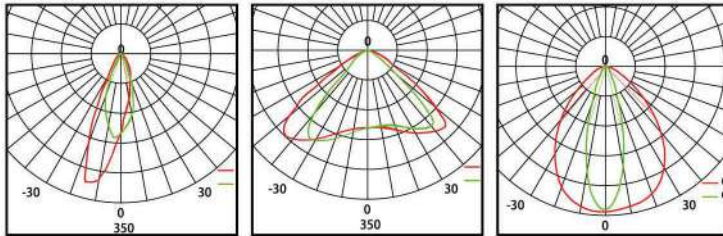

single 25°

double 30°

30°

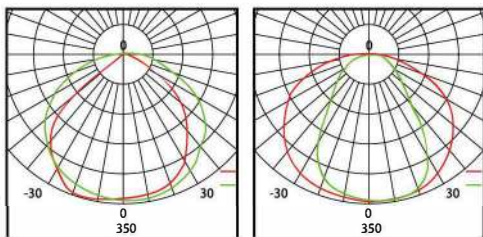

60°

90°

### Other Details

IP Rating	IP44
Lifespan	100,000+ Hours
Storage Temperature	-20°~65°C
Operating Temperature	-20°~55°C
Luminaire Net Weight	1.7KG
Certification	UL, DLC Premium, SAA, TUV, VEET, CB
Color of housing	White(customized)



# CIP LIGHTING

A division of Charlotte International Partners Inc.  
1740 First Baxter Crossing, Fort Mill SC 29708 USA  
1-803-396-1439 info@ciplighting.com



## K3 LED Linear High Bay Light

# 90W


## SPECIFICATIONS



### Technical Data

Model Number	HS-HB90W-K3
Power	90W
Luminous Efficacy	175lm/W
Lumen Output	15750lm
LED Quantity	147pcs
Dimension	888*100*26.5mm
CCT	3000K 4000K 5000K 6000K (Custom Option)
CRI	>80Ra
System Efficiency	≥90%


### Product Dimensions

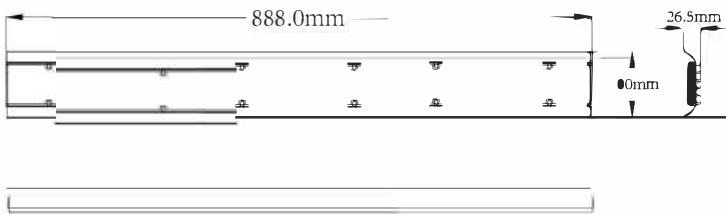

### Electrical Details

Input Voltage	AC100-277V/347V/480V
Power Frequency	50-60Hz
Output Voltage	DC36-48V
Power Efficiency	>92%
Power Factor	≥0.95
Total Harmonic Distortion	≤15%
Dimmable	Yes (Optional)


### Photometrics

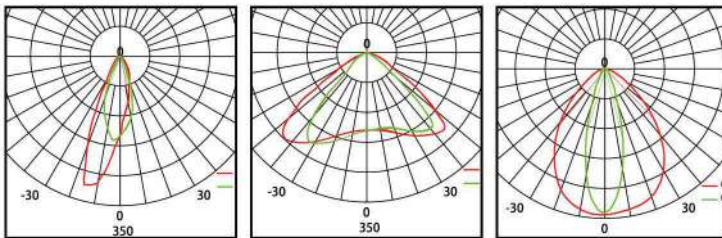

single 25°

double 30°

30°

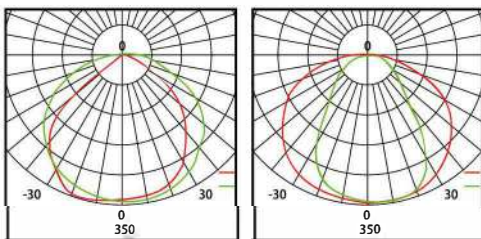

60°

90°

### Other Details

IP Rating	IP44
Lifespan	100,000+ Hours
Storage Temperature	-20°~65°C
Operating Temperature	-20°~55°C
Luminaire Net Weight	2.6KG
Certification	UL,DLC Premium,SAA,TUV,VEET,CB
Color of housing	White(customized)





# CIP LIGHTING

A division of Charlotte International Partners Inc.  
 1740 First Baxter Crossing, Fort Mill SC 29708 USA  
 1-803-396-1439 info@ciplighting.com



## K3 LED Linear High Bay Light

# 120W


## SPECIFICATIONS



### Technical Data

Model Number	HS-HB120W-K3
Power	120W
Luminous Efficacy	175lm/W
Lumen Output	21000lm
LED Quantity	196pcs
Dimension	1183*100*26.5mm
CCT	3000K 4000K 5000K 6000K (Custom Option)
CRI	>80Ra
System Efficiency	≥90%


### Product Dimensions

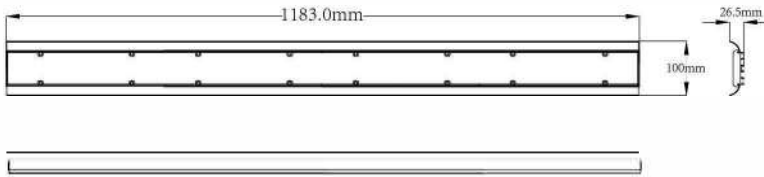

### Electrical Details

Input Voltage	AC100-277V/347V/480V
Power Frequency	50-60Hz
Output Voltage	DC36-48V
Power Efficiency	>92%
Power Factor	≥0.95
Total Harmonic Distortion	≤15%
Dimmable	Yes (Optional)


### Photometrics

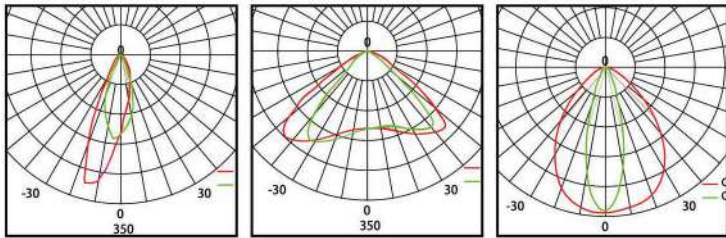

single 25°

double 30°

30°

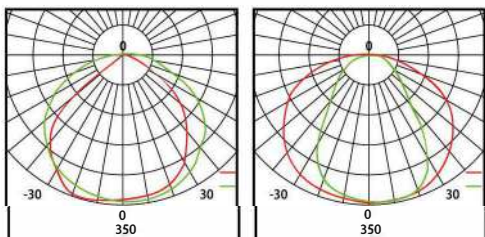

60°

90°

### Other Details


IP Rating	IP44
Lifespan	100,000+ Hours
Storage Temperature	-20°~65°C
Operating Temperature	-20°~55°C
Luminaire Net Weight	3KG
Certification	UL, DLC Premium, SAA, TUV, VEET, CB
Color of housing	White(customized)




# CIP LIGHTING

A division of Charlotte International Partners Inc.  
1740 First Baxter Crossing, Fort Mill SC 29708 USA  
1-803-396-1439 info@ciplighting.com

## Installation

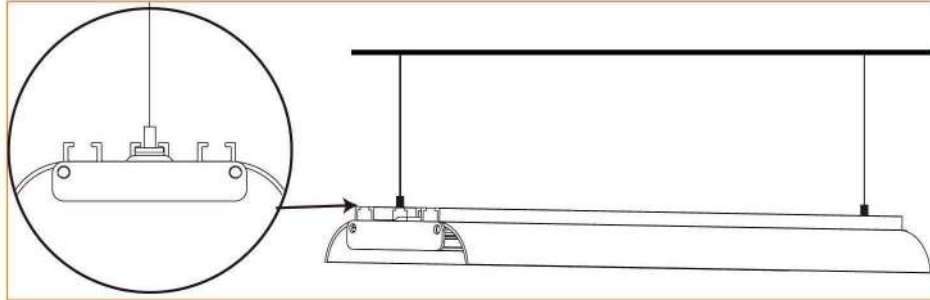

## Application

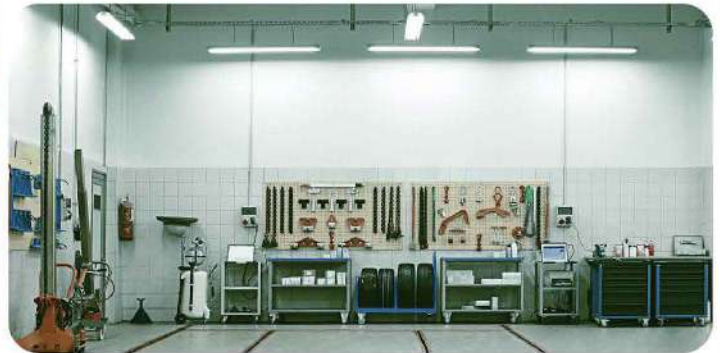

Widely use in Factory, Workshop, Warehouse, Logistics Center, Exhibition Hall, Stadium, Gas Station, Supermarket and etc.

