

SANCHA

Compact Exit Sign

A compact double-sided exit sign with red or green lettering, available in white or black injection-molded thermoplastic housing. An integrated nickel-cadmium battery provides 90 minutes of emergency operation. Mounts to a universal J-box.

- 6 in. letter height with a 3/4 in. stroke, double sided
- Super-bright red or green LED letters — 12 LEDs per unit
- 120 / 277VAC dual voltage operation at 1.9W
- Integral 1.2V 1000mAh nickel-cadmium battery, 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Universal J-box mounting · damp location rated



UL

FCC

CEC

DOE

RoHS

Damp Location


LETTER HEIGHT	6" (152 mm) · 3/4" stroke, double sided
LED SOURCE	12 × LED — red or green
WATTAGE	1.9W
VOLTAGE	120 / 277V AC dual voltage
BATTERY	1.2V 1000mAh nickel-cadmium, integral
EMERGENCY RUNTIME	90 minutes

RECHARGE TIME	24 hours maximum
FINISH	White · Black
MATERIAL	Injection-molded thermoplastic ABS housing · UL 94V-0 flame rating
MOUNTING	Universal J-box mounting
DIMENSIONS	11.60" W × 7.40" H
WARRANTY	5-Year electrical parts & housing

AVAILABLE COMBINATIONS



R-WH
Red · White

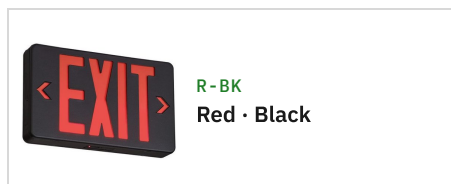

R-BK
Red · Black



G-WH
Green · White

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	FACE	LETTER	FINISH
SANCHA	2S Double Sided	R Red Letters	WH White BK Black
		G Green Letters	WH White

Build Your Order Code — example values shown in grey

MODEL	FACE	LETTER	FINISH
SANCHA	2S	R	WH

DIMENSIONS

MODEL	WIDTH	HEIGHT	DEPTH	LETTER HEIGHT
SANCHA	11.60" (295 mm)	7.40" (188 mm)	—	6.00" (152 mm)

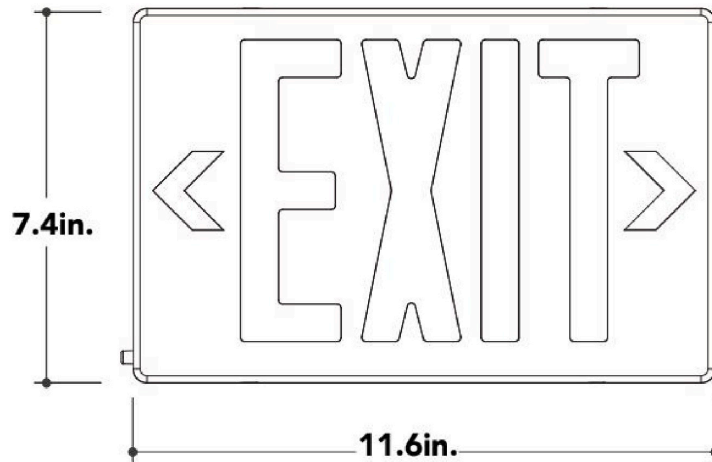

SANCHA COMPACT DOUBLE-SIDED EXIT SIGN — FRONT ELEVATION.

ELECTRICAL & EMERGENCY PERFORMANCE

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED SOURCE	RECHARGE	EMERGENCY RUNTIME
SANCHA-2S-R-WH	120 / 277V	0.015 – 0.008A	1.9W	12 × Red LED	24 hrs	90 min
SANCHA-2S-G-WH	120 / 277V	0.015 – 0.008A	1.9W	12 × Green LED	24 hrs	90 min
SANCHA-2S-R-BK	120 / 277V	0.015 – 0.008A	1.9W	12 × Red LED	24 hrs	90 min

Values as published by the manufacturer. Contact CIP for custom configurations.