

ARVID

LED Architectural Wall Pack

Compact architectural LED wall pack for indoor or outdoor (wet-location) use — museums, galleries, shopping malls, office buildings, and façades. Field-selectable wattage (12/18/24/30W) and CCT (3000/4000/5000K), a die-cast aluminum heat sink, and even, soft PC-lens optics.

- Field-selectable wattage: 12 / 18 / 24 / 30W
- Field-selectable CCT: 3000K / 4000K / 5000K (factory 30W @ 4000K)
- Up to 142 lm/W efficacy
- Wide-range input AC 120–277V / 277–480V
- Die-cast aluminum heat sink — keeps LED Tj < 85°C
- Continuous 1–10V dimming
- Photocell, motion sensor & Bluetooth control (optional)
- Wet-location rated · over 50,000 hr life



UL

RoHS

DLC Premium

Wet Location

LUMEN OUTPUT	1,608 – 3,960 lm
EFFICACY	Up to 142 lm/W
COLOR TEMP / CCT	3000K / 4000K / 5000K
CRI	70 (Ra)
DISTRIBUTION	Type V · 100.4° × 91.6°
WATTAGE	12 / 18 / 24 / 30W (selectable)
VOLTAGE	AC 120–277V · 277–480V
POWER FACTOR	0.90
DIMMING	1–10V continuous · Photocell · Motion · Bluetooth (opt.)

DRIVER	High-efficiency · 90% driver efficacy
FINISH	Dark Bronze, Black, White, Silver
OPERATING TEMP	–22°F to 113°F (storage –40°F to 176°F)
IP / IMPACT	Wet Location
MATERIAL	Die-cast aluminum · PC optical lens
DIMENSIONS	9.91" W × 5.8" H × 4.37" D (wedge — 1.64" at top)
WEIGHT	4.28 lbs (1.94 kg)
LIFETIME	Over 50,000 hrs
WARRANTY	5-Year Limited

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

● **In stock** — all other configurations built to order.





MODEL	WATTAGE	VOLTAGE	CCT	DISTRIBUTION	CONTROLS	OPTIONS	FINISH
ARVID	● PS 12/18/24/30W	● U 120–277V ● H 277–480V	● 3CCT 3000/4000/5000K	● T5 Type V	N None DV 1–10V Dimming ● PC Photocell* MW Motion Sensor BT Bluetooth	N None ● EB 4W Emergency Battery** ● EBL 4W Low-Temp Battery**	● DBZ Dark Bronze BK Black WH White SM Silver

* Photocell (PC) is available on 120–277V (U) only. ** Emergency battery (EB / EBL) available on 120–277V (U) models only.

Build Your Order Code — example values shown in grey


MODEL	WATTAGE	VOLTAGE	CCT	DISTRIBUTION	CONTROLS	OPTIONS	FINISH
ARVID	PS	U	3CCT	T5	PC	N	DBZ

STANDARD FINISHES

DBZ
Dark BronzeBK
BlackWH
WhiteSM
Silver

DIMENSIONS & WEIGHT

SPEC	VALUE
Fixture (W × H × D)	9.91 × 5.8 × 4.37 in (251.7 × 147.2 × 110.9 mm)
Depth at top	1.64 in (41.6 mm)
Net weight	4.28 lbs (1.94 kg)
Cable	5-core · 18 AWG · 11.8 in

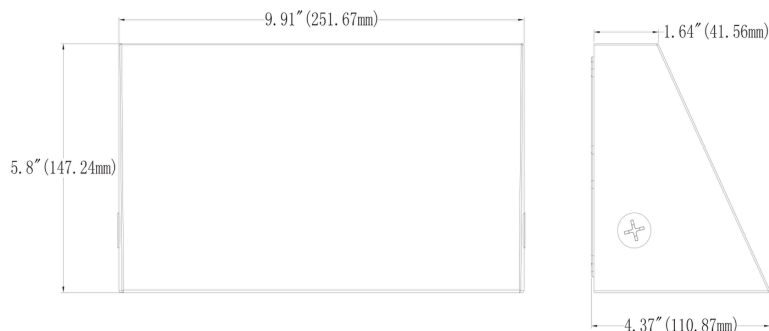

WEDGE PROFILE — 4.37" DEEP AT THE BASE, TAPERING TO 1.64" AT THE TOP.

OPTIONS

CONTROLS

DV	1–10V continuous dimming
PC	Photocell (120–277V only)
MW	Motion sensor
BT	Bluetooth wireless





EMERGENCY BATTERY (OPTION)

EB	4W emergency backup battery driver
EBL	4W low-temp battery driver, –4°F to 131°F (–20°C to 55°C)

ACCESSORIES (SOLD SEPARATELY)

MW	Microwave motion sensor module
RC	Remote controller (pairs with the microwave sensor)

PHOTOMETRY

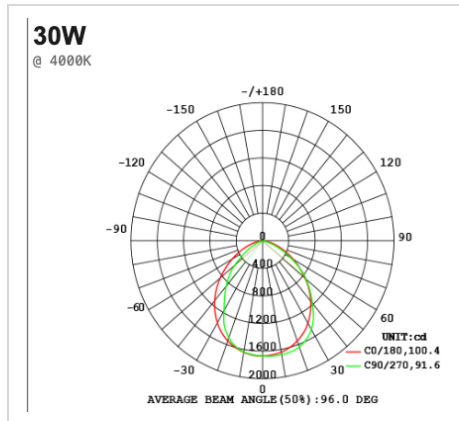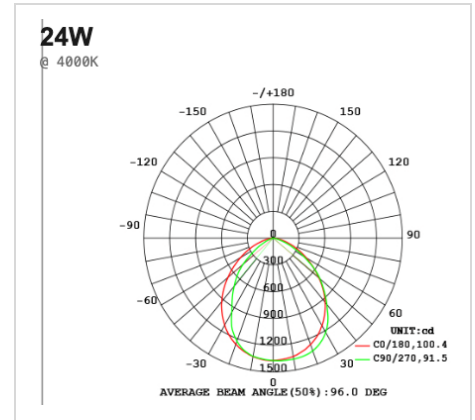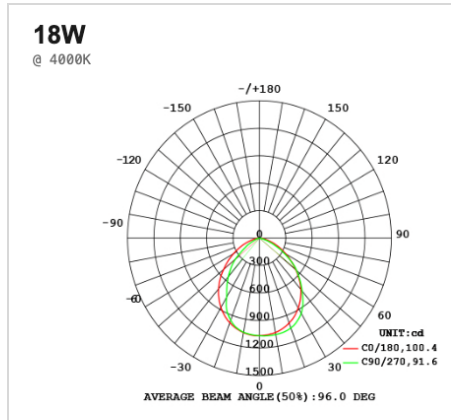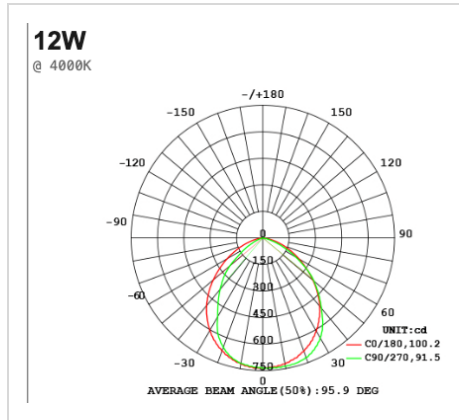

DELIVERED LUMENS

Optic	CCT	12W	18W	24W	30W
Type V	3000K	1,608	2,340	3,024	3,630
	4000K	1,704	2,520	3,264	3,960
	5000K	1,680	2,448	3,120	3,750

Field-selectable wattage and CCT — factory default 30W @ 4000K. Efficacy up to 142 lm/W. Distribution: Type V (100.4° × 91.6°).

DISTRIBUTION Type V · 100.4° × 91.6° **EFFICACY** Up to 142 lm/W **IES FILE** Available on request