

ZANE

LED Garage Luminaire

A low-profile die-cast LED luminaire for parking garages, covered walkways, and service areas in interior and exterior applications. A wide 270° light angle spreads even illumination from a housing only 2.6" deep. IP66 wet-location rated.

- Lumileds LED · 125 lm/W · 75,000 hr rated life
- Wide 270° light angle — broad, even coverage from a 2.6" housing
- Die-cast aluminum cooling design, LED Tj < 85°C
- 1–10V dimming and a factory motion sensor are optional
- UL certified · DLC Premium · IP66 wet location



UL

DLC Premium

FCC

RoHS

IP66

Wet Location

LUMEN OUTPUT	5,625 / 8,750 lm
EFFICACY	125 lm/W
COLOR TEMP / CCT	4000K / 5000K
CRI	70 (Ra)
DISTRIBUTION	270°
LED SOURCE	Lumileds
WATTAGE	45 / 70W
VOLTAGE	120–277V
POWER FACTOR	0.95
DIMMING	1–10V (optional)

DRIVER	Electronic · PF 0.95 · driver efficiency 90%
FINISH	Dark Bronze, White
OPERATING TEMP	–30°C to +45°C (–22°F to 113°F)
IP / IMPACT	IP66 · Wet Location
MATERIAL	Die-cast aluminum
CORD LENGTH	12" (0.3 m) input cable
DIMENSIONS	13.8" × 13.8" × 2.6"
LIFETIME	75,000 hrs
WARRANTY	5-Year Limited

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	FINISH
ZANE	45 45W 70 70W	U 120-277V	40 4000K 50 5000K	N None DV 1-10V dimming MW Motion sensor	DBZ Dark Bronze WH White


Build Your Order Code — example values shown in grey

MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	FINISH
ZANE	45	U	50	MW	DBZ

FINISHES





DBZ
Dark Bronze



WH
White

DIMENSIONS & WEIGHT

FIXTURE	WIDTH	LENGTH	HEIGHT	WEIGHT
Overall	13.8" (350 mm)	13.8" (350 mm)	2.6" (66 mm)	9.32 lb (4.2 kg)

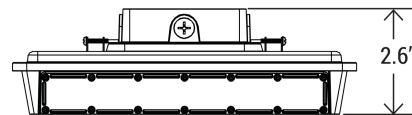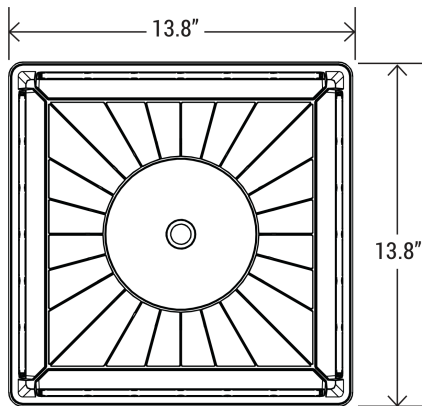

SQUARE 13.8" FOOTPRINT, 2.6" DEEP. SIDE VIEW SHOWS THE INTEGRAL JUNCTION BOX.

OPTIONS



CONTROLS

DV	1–10V dimming driver
MW	Factory-installed motion sensor

ACCESSORIES (ORDERED SEPARATELY)

MS	Motion sensor, 120–277V
MSA	Area-light motion sensor
MSD	Motion + daylight sensor, multi-level control
RC	Handheld remote controller
EB8	Emergency backup battery driver, 8W
EB15	Emergency backup battery driver, 15W
EB20	Emergency backup battery driver, 20W

PHOTOMETRY

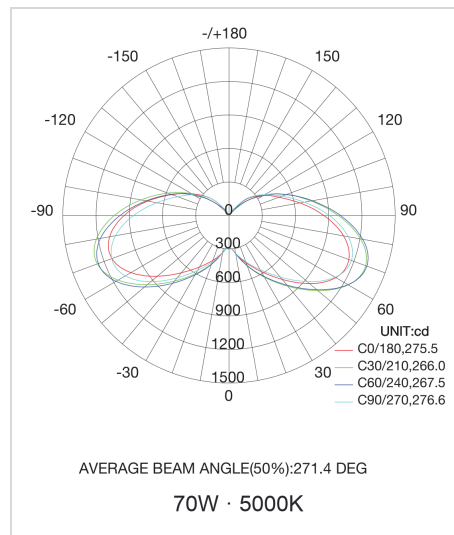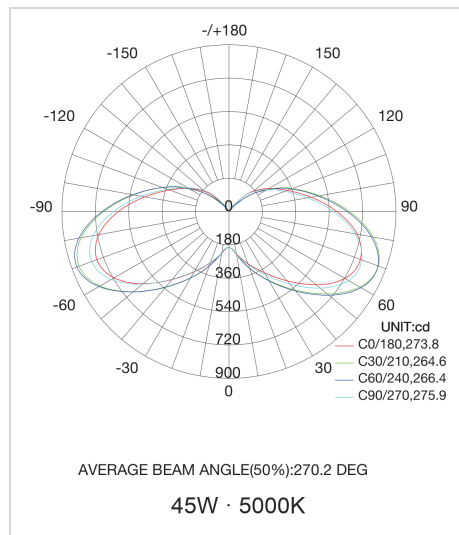

DELIVERED LUMENS

Distribution	CCT	45W	70W
270° canopy	Nominal	5,625 lm	8,750 lm

Nominal delivered lumens per the manufacturer's photometric report — 125 lm/W at both wattages, consistent across 4000K and 5000K.

DISTRIBUTION 270° **EFFICACY** 125 lm/W **IES FILE** Available on request