



ANTI-GLARE DOWNLIGHT SERIES



- 2700K
- 3000K
- 3500K
- 4000K
- 5000K

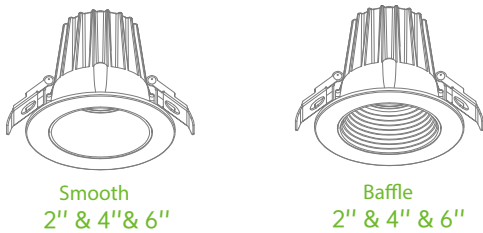

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
COB02-R9W-5CCT	120V AC Dimmable	9W	650LM	5CCT Tunable	Ø 70MM	80X67MM
COB04-R12W-5CCT	120V AC Dimmable	12W	1000LM	5CCT Tunable	Ø 108MM	122X77MM
COB04-R15W-5CCT	120V AC Dimmable	15W	1200LM	5CCT Tunable	Ø 108MM	122X77MM
COB06-R18W-5CCT	120V AC Dimmable	18W	1500LM	5CCT Tunable	Ø 140MM	180X85MM
COB06-R20P-5CCT	100-277V AC Dimmable	10/15/20W Power Selectable	1800LM	5CCT Tunable	Ø 140MM	180X85MM
COB06-R25P-41	100-277V AC Dimmable 0-10V & Triac Dimming	15/20/25W Power Selectable	2200LM	5CCT Tunable	Ø 140MM	180X85MM

KEY FEATURES

- ★ Having smooth & baffle design for choice, easy DIY change the design.
- ★ CRI 90+ , beam angle 36° degree.
- ★ Anti-glare design, no harm to eyes.
- ★ Airtight & IC rated, no housing required.
- ★ Suitable for damp locations.
- ★ Option: 0-10V dimmable & Triac Dimmable & Power Selectable & 5CCT Tunable in one fixture.

Trim Color




Junction Box



KEY FEATURES

- ★ Having smooth & baffle design for choice, easy DIY change the design.
- ★ CRI 90+ , beam angle 36° degree.
- ★ Anti-glare design, no harm to eyes.
- ★ Airtight & IC rated, no housing required.
- ★ Suitable for damp locations.
- ★ Option: 0-10V dimmable & Triac Dimmable & Power Selectable & 5CCT Tunable in one fixture.


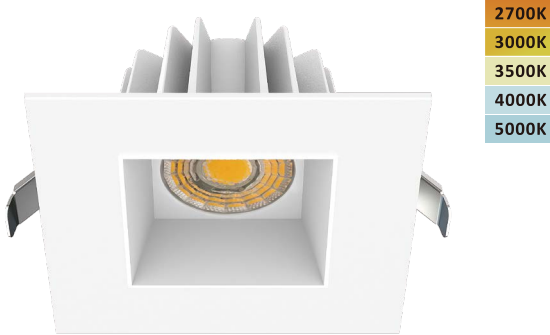


- 2700K
- 3000K
- 3500K
- 4000K
- 5000K

Trim Color



Junction Box

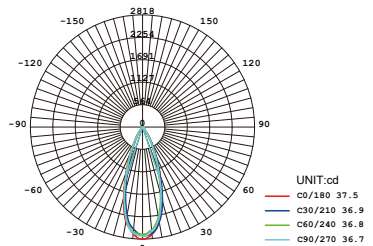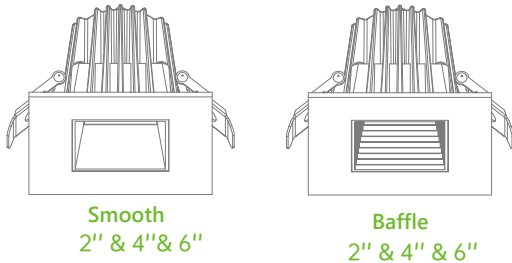

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
COB02-S9W-5CCT	120V AC Dimmable	9W	650LM	5CCT Tunable	Ø 70MM	80X80X57MM
COB04-S12W-5CCT	120V AC Dimmable	12W	1000LM	5CCT Tunable	Ø 108MM	122X122X64MM
COB04-S15W-5CCT	120V AC Dimmable	15W	1200LM	5CCT Tunable	Ø 108MM	122X122X64MM
COB06-S18W-5CCT	120V AC Dimmable	18W	1500LM	5CCT Tunable	Ø 140MM	173X173X85MM
COB06-S20P-5CCT	100-277V AC Dimmable	10/15/20W Power Selectable	1800LM	5CCT Tunable	Ø 140MM	173X173X85MM
COB06-S25P-41	100-277V AC Dimmable -10V & Triac Dimming	15/20/25W Power Selectable	2200LM	5CCT Tunable	Ø 140MM	173X173X85MM