

INTRODUCTION

CURVED MAGNETIC TRACK LED SPOTLIGHT

FEATURE

Anti-glare Uniform Lighting UGR≤16
 Long Lifespan Design>50,000Hours
 Working Temperature: -20℃~40℃

MAIN MATERIAL

LED BRAND: GUBO
 LED Driver Brand: GUBO
 Housing: Die-casted Aluminum
 Optics: High Efficiency Reflector
 Diffuser: Light-frosted PC Diffuser

INSTALLATION


W20 Magnetic Track Slotted
 Suitable for Interior Lighting

STANDARD

Designed and Manufactured to Comply with
 CE/RoHS/EMF/TUV/SAA/Erp/cETL/FCC
 IP20 Protection, Class III Electric

OPTION

LED CCT: 1,800K~10,000K/R/G/B/Y
 [CRI]: Ra80, [G] Ra90, [H] RA97
 Custom Housing Finished Color:




Custom Housing Finished Color:

MATT WHITE [HMWT] MATT BLACK [HMBK]

CASE STUDY:

DIMENSION: [UNIT: MM]

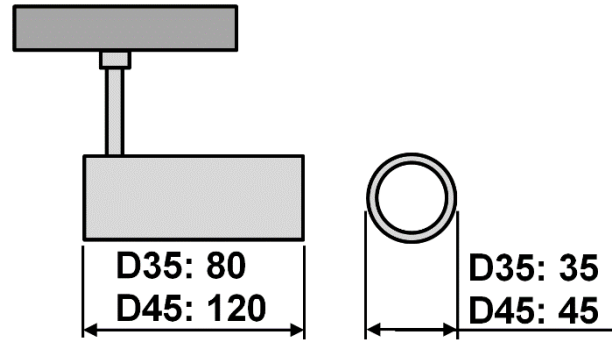

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	REMOTE CONTROL	INPUT [V]
GTR4464A-D35	5W	5x2W SMD3030	G2700K	RA90	385	>0.5	BL24D:24°	[CDP]:PWM(1%) [REMOTE DRIVER] [CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDZ]:ZIGBEE(1%) [CRF]:2.4GRF(1%)	DC24V [DC48V]
			G3000K	RA90	405				
			G3500K	RA90	400				
			G4000K	RA90	420				
			G5000K	RA90	420				
			H2700K	RA97	335				
			H3000K	RA97	345				
			H3500K	RA97	345				
			H4000K	RA97	380				
			2C@5W	5TGW	G2700K				
GTR4464A-D45	10W	10x2W SMD3030	G2700K	RA90	770	>0.9	BL24D:24°	[REMOTE DRIVER] [CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDZ]:ZIGBEE(1%) [CRF]:2.4GRF(1%)	[REMOTE DRIVER] AC220~240V [AC100~240V] [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	810				
			G3500K	RA90	800				
			G4000K	RA90	840				
			G5000K	RA90	840				
			H2700K	RA97	670				
			H3000K	RA97	690				
			H3500K	RA97	690				
			H4000K	RA97	760				
			2C@10W	10TGW	G2700K				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±3.

CIP Lighting

T: 1-803-766-0243 W: www.ciplighting.com E: info@ciplighting.com