


GRETA

LED Wall Step Light

A flush-faceplate LED step light with a recessed louvre face — the aperture sits back behind the plate for a tighter cut-off and no view of the source. Surface mounted on a wall, ceiling or 4" J-box, in round and square trims across three output tiers.

- Recessed louvre face — aperture set back for a tight cut-off
- Round or square, 4.6" to 7.9"
- Output follows the size — 3W · 6W · 10W (up to 680 lm)
- Anti-glare soft light · RA90 standard (RA80 / RA97 optional)
- Nine control options — TRIAC, 0/1–10V, DALI, DMX512, PWM, Zigbee, Bluetooth, RF
- IP65 · IK08 · Class I · CE / RoHS / ETL / FCC / SAA

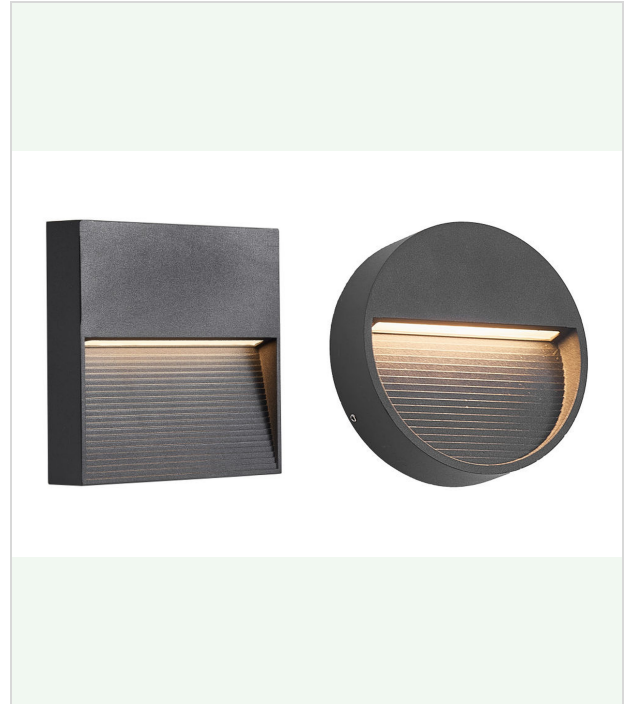

LUMEN OUTPUT	180 – 680 lm (by tier)
COLOR TEMP / CCT	2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K
COLOR QUALITY / CRI	RA90 (RA80 / RA97 optional)
DISTRIBUTION	T2M 65° × 135° · BDF 120° (LM-20%)
LED SOURCE	GUBO
WATTAGE	3W / 6W / 10W (by trim size)
VOLTAGE	AC 100–277V 50/60Hz · AC 220–240V · AC 110–130V · DC 12V / 24V / 36V / 42V
DIMMING / CONTROLS	Non-dimmable std · TRIAC / 0–10V / 1–10V / DALI / DMX512 / PWM · Zigbee / Bluetooth / 2.4G RF

DRIVER	GUBO
FINISH	White, Black, Grey, Dark Grey, Brass
IP / IMPACT	IP65 · IK08
MATERIAL	Die-cast aluminium housing · corrosion-resistant plastic sleeve
LENS	High-efficiency PC lens
MOUNTING	Wall or ceiling surface · [FJP] plate for 4" J-box
DIMENSIONS	Round Ø4.6–7.9" · square 4.6–7.9" · 1.3" deep
LIFETIME	>50,000 hrs

Ordering

GRETA


CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	CCT	CRI	VOLTAGE	SHAPE	SIZE	CONTROLS	FINISH
GRETA	27 2700K	80 RA80	U AC 100-277V	RD Round	46 4.6" · 3W	N Non-dimmable	WH White
	30 3000K	90 RA90	AC220 AC 220-240V	SQ Square	59 5.9" · 6W	DT TRIAC	BK Black
	35 3500K	97 RA97	AC110 AC 110-130V		79 7.9" · 10W	DV 0/1-10V	GY Grey
	40 4000K		DC12 DC 12V			DA DALI	AGY Dark Grey
	50 5000K		DC24 DC 24V			DX DMX512	BR Brass
	57 5700K		DC36 DC 36V			DP PWM	
	65 6500K		DC42 DC 42V			ZB Zigbee	
	TW Tunable White					BT Bluetooth	
	RGB					RF 2.4G RF	
	RGBW						
	RGBA						


Build Your Order Code — example values shown in grey

MODEL	CCT	CRI	VOLTAGE	SHAPE	SIZE	CONTROLS	FINISH
GRETA	30	90	U	SQ	46	N	BK

FINISHES




WH
White (RAL9010)



BK
Black (RAL9005)



GY
Grey (RAL7042)




AGY
Dark Grey
(RAL7016)



BR
Brass (RAL1024)

RECESSED LOUVRE FACE — TRIM SHAPES




RD
Round
Sizes 46 · 59 · 79



SQ
Square
Sizes 46 · 59 · 79

Dimensions

SHAPE	SIZE	FACE SIZE	OUTPUT
RD Round	46	Ø4.6" (118 mm)	3W
RD Round	59	Ø5.9" (150 mm)	6W
RD Round	79	Ø7.9" (200 mm)	10W
SQ Square	46	4.6" (118 mm)	3W
SQ Square	59	5.9" (150 mm)	6W
SQ Square	79	7.9" (200 mm)	10W
All	—	Depth 1.3" (32 mm)	—

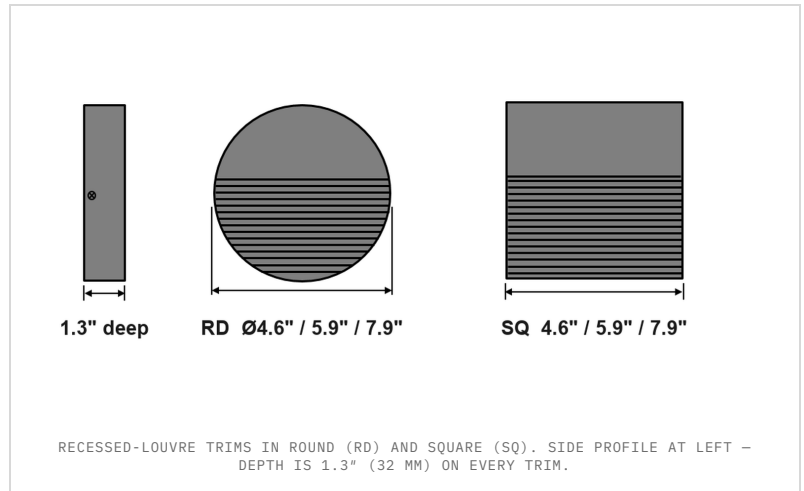

Photometry

DELIVERED LUMENS — WHITE, RA90

Optic	CCT	3W	6W	10W
White (RA90)	2700K	180	360	600
	3000K	190	380	640
	3500K	190	380	640
	4000K	210	410	680
	5000K	210	410	680
	5700K	210	410	680
	6500K	200	400	670

Nominal delivered lumens at RA90; tolerance $\pm 10\%$ at 25°C. Output follows the size — 3W on size 46, 6W on size 59, 10W on size 79.

DELIVERED LUMENS — TUNABLE WHITE & COLOUR

Mode	Output	3W	6W	10W
TW Tunable White	Delivered	150	320	530
RGB	Delivered	120	240	400
RGBW	Delivered	150	320	530
RGBA	Delivered	120	240	400

Tunable White spans 2700K–6500K from one fixture. RGB / RGBW / RGBA are multi-chip (620 nm red · 520 nm green · 455 nm blue, plus 2700K white or amber); values are total delivered lumens with all channels at full.

DISTRIBUTION T2M 65° × 135° · BDF 120° (LM-20%) **EFFICACY** — **IES FILE** On request