

ULLA 1

LED Area Luminaire

An open-cage LED area post top for pedestrian streets, gardens, courtyards, hotels, parking areas, and public parks. Five outputs from 30 to 150W share one 13.6" air-cooled housing with low-glare frosted optics, carried on three curved support rods above the pole fitter. The base slips over a 2-3/8" or 3" pole; wall-bracket and floor-mount configurations, photocell and motion-sensor controls, and a house-side shield are available.

- Five outputs, 30 / 50 / 75 / 100 / 150W — up to 19,500 lm from one 13.6" housing
- 130 lm/W standard · 150 lm/W high-efficacy option
- Type V (120°) standard · Type II, III, IV refractive optics available
- Slips over a 2-3/8" or 3" pole — wall-bracket and floor-mount versions
- Air-cooling housing design · IP67 · -40°F rated
- Photocell and motion-sensor options · cETLus, DLC, CE, RoHS



cETLus

DLC

CE

RoHS

SAA

ISO 9001

IP67

LUMEN OUTPUT	Up to 19,500 lm
EFFICACY	130 lm/W (150 lm/W optional)
COLOR TEMP / CCT	2700K / 3000K / 4100K / 5000K / 5700K
COLOR QUALITY / CRI	80+ (Ra)
DISTRIBUTION	Type V (120°) · Type II / III / IV optional
LED SOURCE	SMD LED
WATTAGE	30 / 50 / 75 / 100 / 150W
VOLTAGE	100–277V · 200–480V
POWER FACTOR	>0.95
DIMMING / CONTROLS	Non-dimmable

DRIVER	UL-listed power supply
FINISH	Bronze, Black, White
OPERATING TEMP	-40°F to +113°F
IP / IMPACT	IP67 · Wet Location
LENS	Frosted cover
MOUNTING	Post top (slips over 2-3/8" or 3" pole) · wall bracket · floor mount
DIMENSIONS	13.6" Ø × 22.17" H (post top) · up to 29.33" H by configuration
WEIGHT	11.0 lb (fixture, net) · 5.1 lb (wall bracket)
LIFETIME	50,000 hrs
WARRANTY	5-Year Limited

Ordering & Dimensions

ULLA 1

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.



● In stock — all other configurations built to order.

MODEL	WATTAGE	CCT	VOLTAGE	DISTRIBUTION	MOUNTING	CONTROLS	OPTIONS	FINISH
ULLA 1	● 30 30W ● 50 50W ● 75 75W ● 100 100W ● 150 150W	27 2700K ● 30 3000K 41 4100K ● 50 5000K 57 5700K	● U 100- 277V H 200- 480V	● T5 Type V T2 Type II T3 Type III T4 Type IV	● SF2 2-3/8" pole ● SF3 3" pole WL Wall mount FL Floor mount	● N None PC Photocell MS Motion sensor SC Shorting cap	● N None HS House-side shield	● BZ Bronze ● BK Black WH White

Build Your Order Code — example values shown in grey


MODEL	WATTAGE	CCT	VOLTAGE	DISTRIBUTION	MOUNTING	CONTROLS	OPTIONS	FINISH
ULLA 1	100	50	U	T5	SF2	N	N	BZ

STANDARD FINISHES

BZ
BronzeBK
BlackWH
White


Dimensions & Weight

CONFIGURATION	OVERALL HEIGHT	HOUSING Ø	POLE ID (FITTER)
ULLA 1 (post top)	22.17" (563 mm)	13.6" (345 mm)	2.44" / 3.07"
ULLA 1 (motion sensor)	25.08" (637 mm)	13.6" (345 mm)	2.44" / 3.07"
ULLA 1 (wall bracket)	29.33" (745 mm)	13.6" (345 mm)	—
ULLA 1 (floor mount)	24.05" (611 mm)	13.6" (345 mm)	—

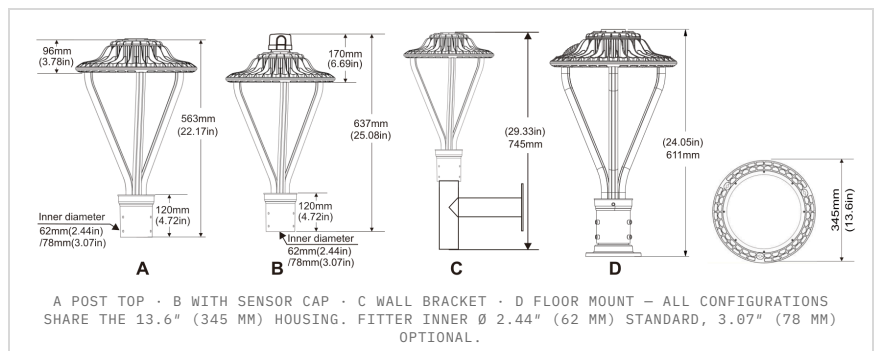


Mounting


ULLA 1



SF2-SF3
Post Top
2-3/8" or 3" pole

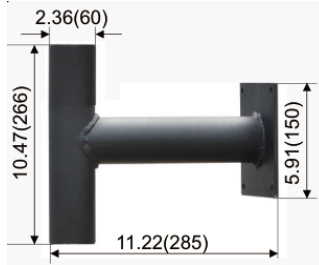

WL
Wall Mount
Bracket arm

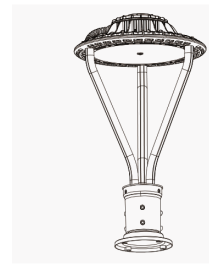

FL
Floor Mount
Surface base

Options


CONTROLS & ACCESSORIES



PC
Photocell



MS
Motion Sensor



SC
Short Cap



HS
House-Side Shield


POLE ADAPTERS — SOLD SEPARATELY



RP95
Round pole
3.74" (95 mm)




RP110
Round pole
4.33" (110 mm)




RP115
Round pole
4.53" (115 mm)




RP150
Round pole
5.91" (150 mm)



RP175
Round pole
6.89" (175 mm)



SP80
Square pole
3.15" (80 mm)



SP110
Square pole
4.33" (110 mm)

Each adapter steps a larger pole down to a 2-3/8" (60 mm) tenon — use with the SF2 mounting.

Photometry

ULLA 1

OUTPUT & HID REPLACEMENT

WATTAGE	DELIVERED LUMENS	REPLACES
30W	3,900 lm	HPS 100W
50W	6,500 lm	HPS 175W
75W	9,750 lm	HPS 200W
100W	13,000 lm	HPS 300W
150W	19,500 lm	HPS 500W

At the standard 130 lm/W build.

Distribution Type V (120°) · Type II / III / IV optional **Efficacy** 130 lm/W (150 lm/W optional) **CRI** 80+ (Ra)

IES File On request

