
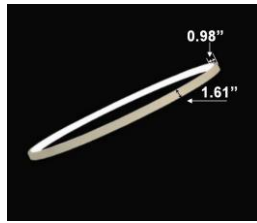


Light Outside

Light Inside

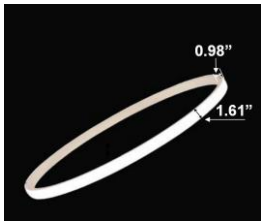

CIP-K-2 Tier

PRODUCT DESCRIPTION

Introducing Circular Lighting, a harmonious blend of modern design and functionality. Crafted from extruded aluminum with meticulously designed lenses, these luminaires offer options illumination inside or outside. Available in sizes ranging from 31.5" to 70.87", allowing for versatile configurations. With tunable white and RGBW options, select from over 6,500 powder-coated colors to set the perfect ambiance. Delivered fully assembled for your convenience.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination inside or outside the profile.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Fixture lumens per watt ratio up to 75 LPW for illumination.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.



PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch







MODEL INFORMATION:

Example: CIP-K2T-S02A-90W-S-B

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*CIP-K2T-S02A CIP-K2T-S02B CIP-K2T-S02C CIP-K2T-S02D CIP-K2T-S02E CIP-K2T-S02F CIP-K2T-S02H CIP-K2T--S02J CIP-K2T-S02K	*90W=39.3 7"+31.5"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default) 5'=5 foot 60"
			C= Dali	S=Platinum Silver	15'=15 foot 180" 20'=20 foot 240"
	110W=47.24"+39.37"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	25'=25 foot 300"
	150W=70.87"+59.06"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	O=Oil Rubbed Bronze	30'=30 foot 360"
CIP-K2T-S02G CIP-K2T--S02I	90W=31.5"39.37"	R3= RGB+3000K	L=ELV / Triac dimming		
	110W=39.37"+47.24"				
	150W=59.05"+70.87"	R4=RGB+4000K			
<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</p>					

Note: We try to keep standard parts in stock, please check stock and lead time when ordering.


STANDARD COLOR FINISHES / Custom Colors are available, ask representative for more information



LUMEN OUTPUT

Model Number	Size	Wattage	Kevin Temp field selectable	Lumen
CIP-K2T-S02A/B/C/D/E/F/H/J/K	39.37"+31.5"	90W	2700K/3500K/3500K 3000K/3500K/4000K	6750 lm
	47.24"+39.37"	110W	2700K/3500K/3500K 3000K/3500K/4000K	8250 lm
	70.87"+59.05"	150W	2700K/3500K/3500K 3000K/3500K/4000K	11250 lm
CIP-K2T-S02G/I	31.5"+39.37"	90W	2700K/3500K/3500K 3000K/3500K/4000K	6750 lm
	47.24"+59.05"	130W	2700K/3500K/3500K 3000K/3500K/4000K	9750 lm
	59.05"+70.87"	150W	2700K/3500K/3500K 3000K/3500K/4000K	11250 lm

EMERGENCY BATTERY OPTIONS

PICTURE	MODEL NUMBER	DESCRIPTION
	CIP-K2T-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	CIP-K2T-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	CIP-K2T-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes





RGBW/TUNABLE WHITE SMART CONTROL

Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.





PHOTOMETRIC: Illumination outside the profile, light inside

CIP-K2T-S01A40WZ 31.50" 40W @ 4000K

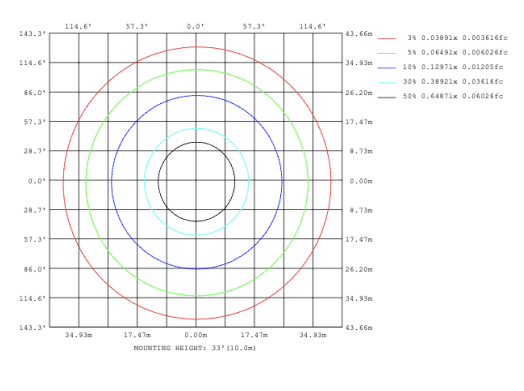
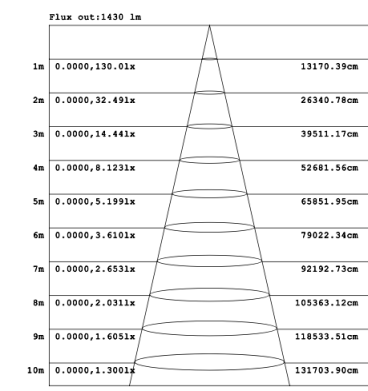
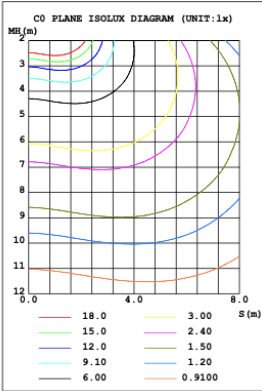
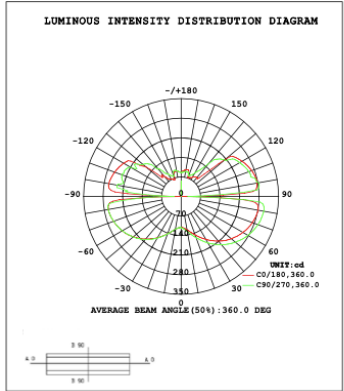


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.





CIP-K2T-S01A50WZ 39.37" 50W @ 4000K

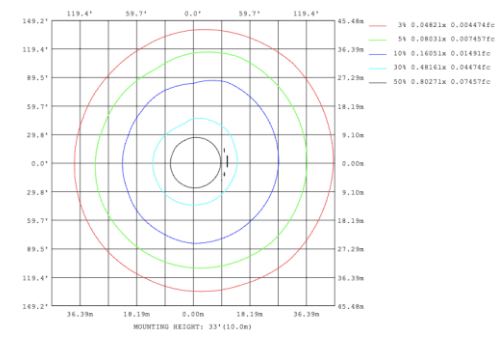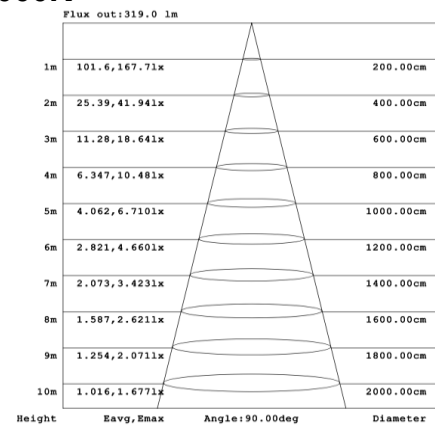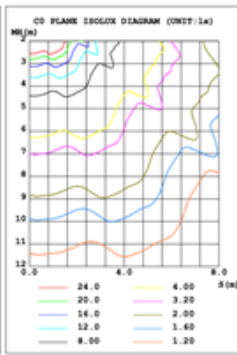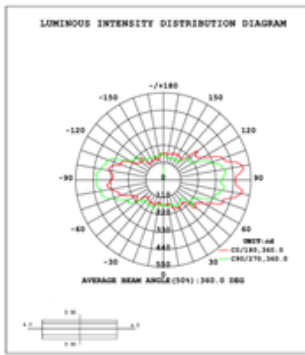





CIP-K2T-S01A60WZ 47.24" 60W @ 4000K

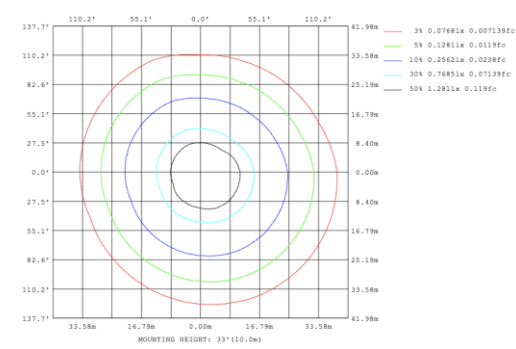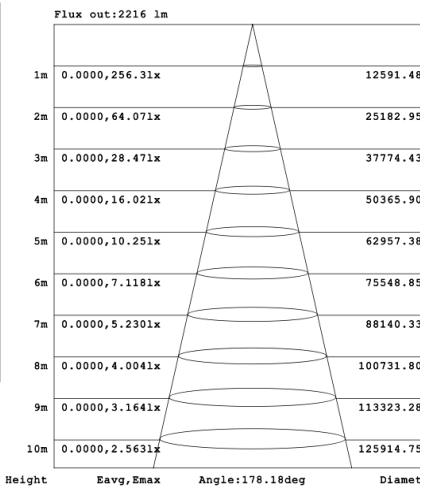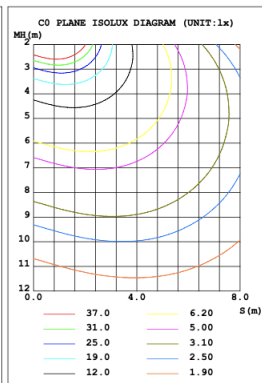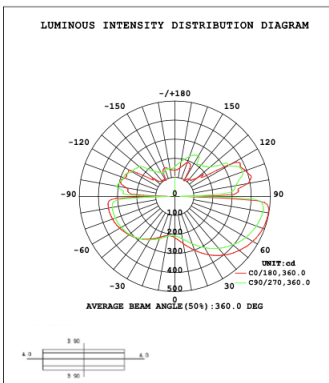

CIP-K2T-S01A70WZ 59.06" 70W @ 4000K

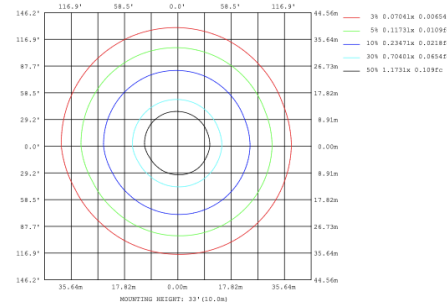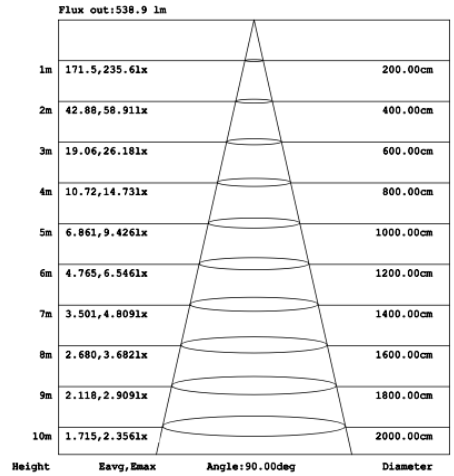
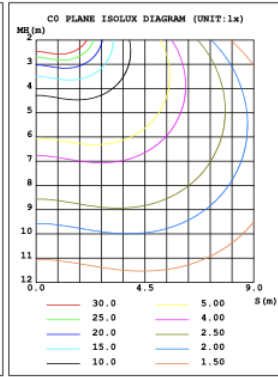
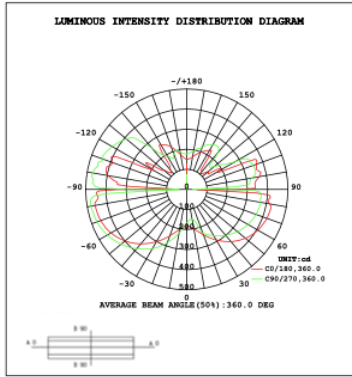


CIP-K2T-S01A80WZ 70.87" 80W @ 4000K

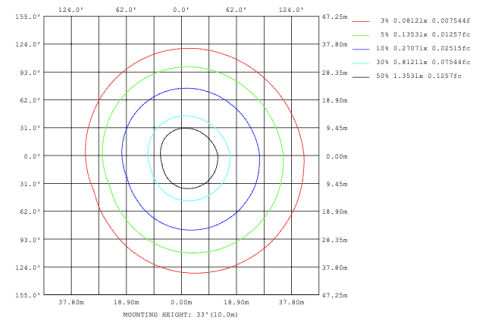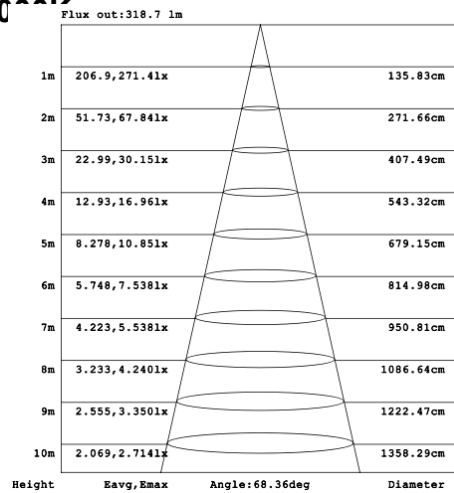
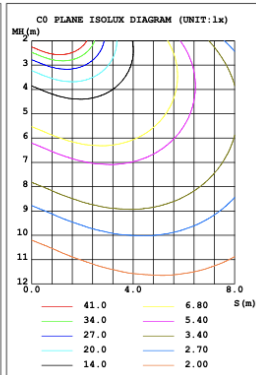
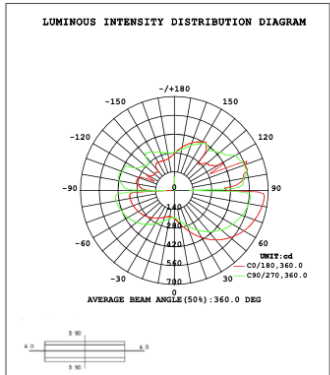


Illumination inside the profile, light outside




CIP-K2T-S01B40WZ 31.50" 40W @ 4000K

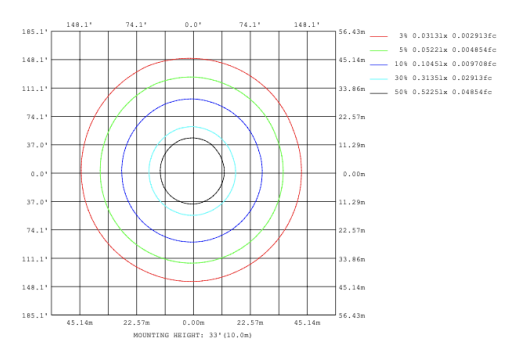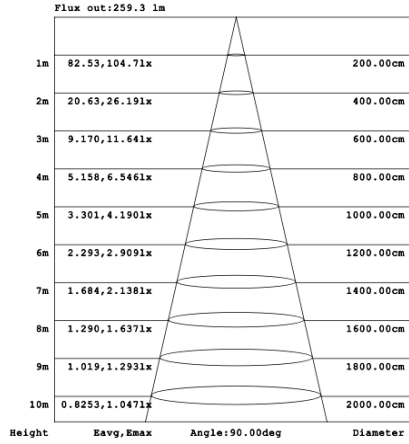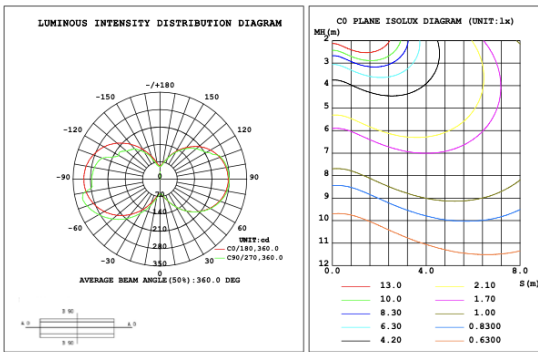




CIP-K2T-S01B50WZ 39.37" 50W @ 4000K

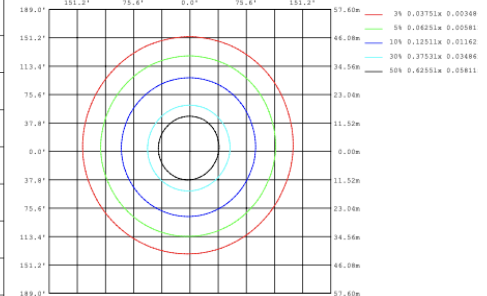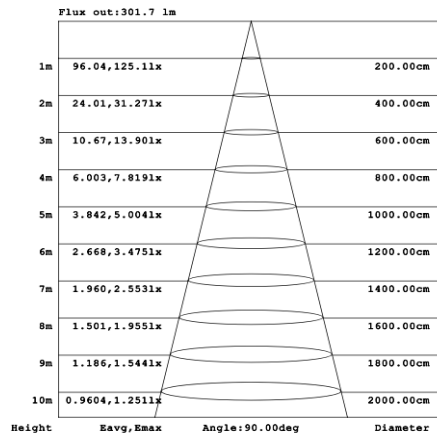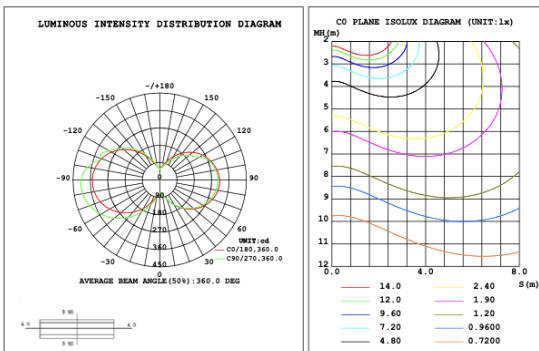




CIP-K2T-S01B60WZ 47.24" 60W @ 4000K

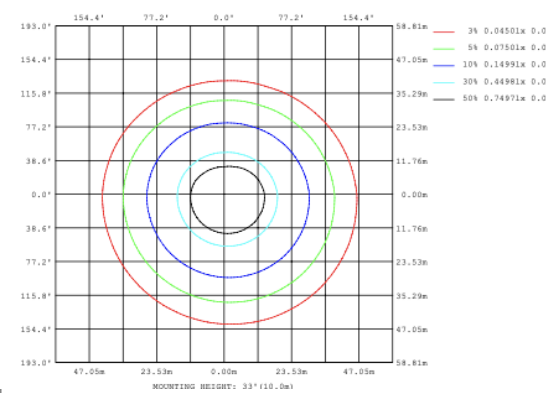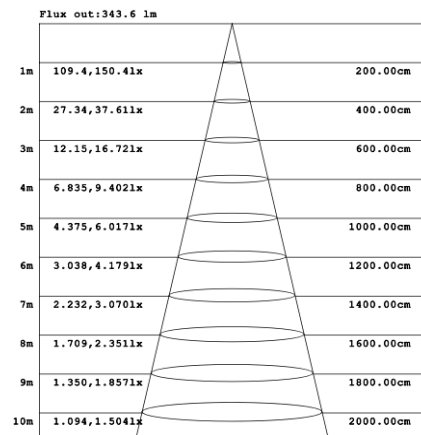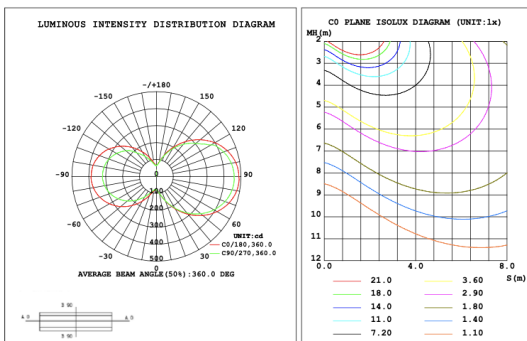

CIP-K2T-S01B70WZ 59.06" 70W @ 4000K

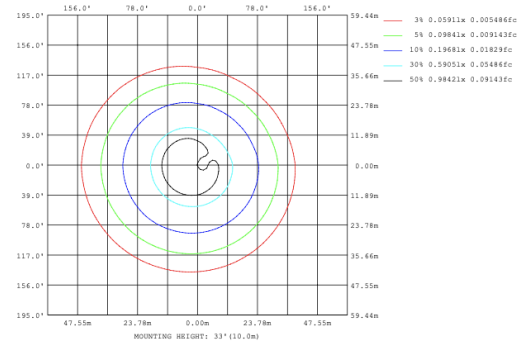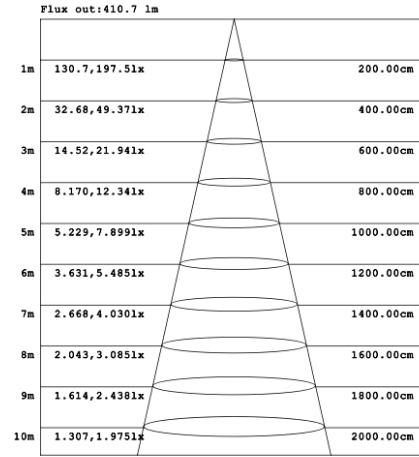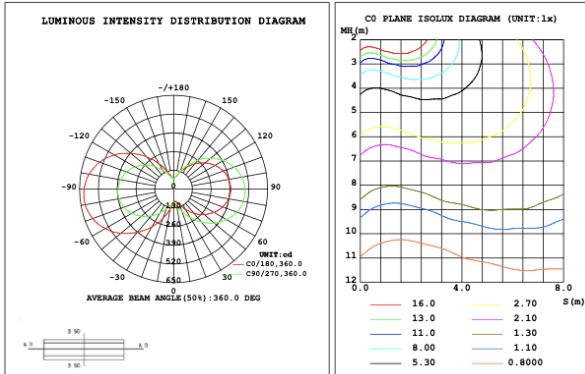

CIP-K2T-S01B80WZ 70.87" 80W @ 4000K

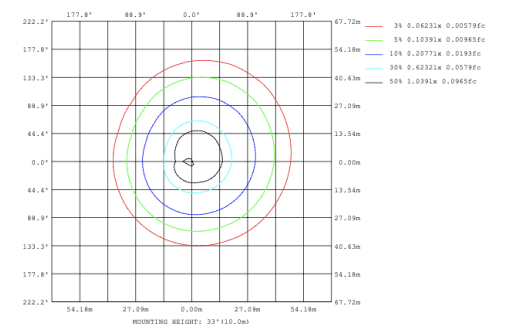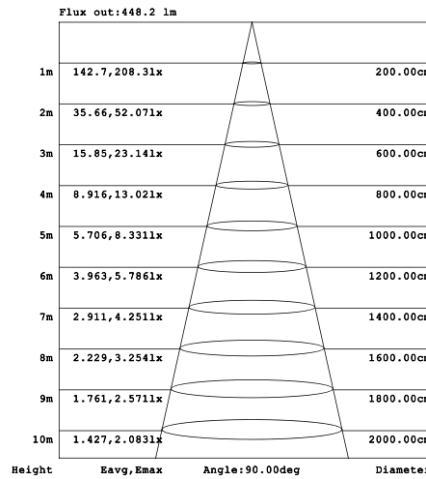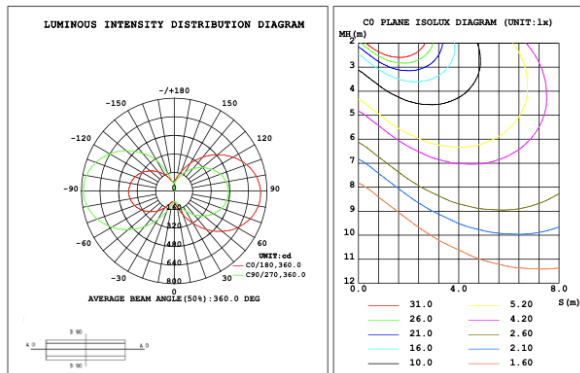

Other Configurations (up to 6 rings)

