

FINN 2

LED Area Luminaire

A UFO-style round LED post top for walkways, parking areas, community grounds, and plazas. Three power-select models cover 40–150W from one Ø16.6" aluminum housing with PC lens, with a built-in power switch and 3CCT switch (3000/4000/5000K) set at install. The slip-fitter base fits a 3" round-pole tenon — 2-3/8" adapter available — and the 88° turnable bracket folds the head flat to save package volume. Photocell, motion sensor, and WiFi camera options.

- UFO-style round post top — Ø16.6" aluminum housing with PC lens
- Three power-select models: W60 (40/50/60W) · W100 (60/80/100W) · W150 (120/135/150W)
- 3CCT switch — 3000K / 4000K / 5000K field-selectable
- 130–140 lm/W efficacy — up to ~21,000 lm at 150W
- 88° turnable bracket — head folds flat to cut package volume
- Fits 3" round-pole tenon (2-3/8" adapter) · photocell, motion sensor, WiFi camera optional
- -40°F to +113°F rated · UL, DLC, CE, RoHS



LUMEN OUTPUT	Up to ~21,000 lm
EFFICACY	130–140 lm/W
COLOR TEMP / CCT	3000K / 4000K / 5000K / 3CCT switch
COLOR QUALITY / CRI	70+ (Ra)
DISTRIBUTION	Type V (144°)
LED SOURCE	Samsung SMD 2835 (or equal)
WATTAGE	40 – 150W (three power-select models)
VOLTAGE	120–277V · 120–347V · 180–480V
DRIVER	Meanwell / SOSEN / ZHIHE · THD <15%

FINISH	Bronze, Black
OPERATING TEMP	-40°F to +113°F
MATERIAL	Aluminum alloy · PC lens
LENS	PC lens
MOUNTING	Slip fitter — 3" round-pole tenon (standard) · 2-3/8" tenon adapter available
DIMENSIONS	Ø16.58" (421.2 mm) × 17.03" (432.6 mm) H
WEIGHT	13.9 – 14.8 lb
LIFETIME	50,000 hrs
WARRANTY	5-Year Limited

Ordering & Dimensions

FINN 2

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

● In stock — all other configurations built to order.


MODEL	WATTAGE	CCT	VOLTAGE	DISTRIBUTION	MOUNTING	OPTIONS	FINISH
FINN 2	W60 40/50/60W ● W100 60/80/100W W150 120/135/150W	● 30 3000K ● 40 4000K ● 50 5000K ● 3CCT (3000/4000/5000K)	● U 120-277V E 120-347V H 180-480V	● T5 Type V	SF3 Slip ● fitter · 3" tenon SF2 2-3/8" tenon adapter*	● N None ● PC Photocell sensor ● MS Motion sensor CAM WiFi camera	BZ Bronze ● BK Black

* SF2 uses a 2-3/8" tenon adapter on the standard 3" slip-fitter base.

Build Your Order Code — example values shown in grey


MODEL	WATTAGE	CCT	VOLTAGE	DISTRIBUTION	MOUNTING	OPTIONS	FINISH
FINN 2	W100	30	U	T5	SF3	N	BZ

STANDARD FINISHES

BZ
BronzeBK
Black


Dimensions & Weight

MODEL	DIAMETER	HEIGHT	MOUNT COLLAR	WEIGHT (NET)
FINN 2	Ø16.58"	17.03"	Ø3.07"	13.9 -
(40-	(421.2	(432.6	(78	14.8
150W)	mm)	mm)	mm)	lb

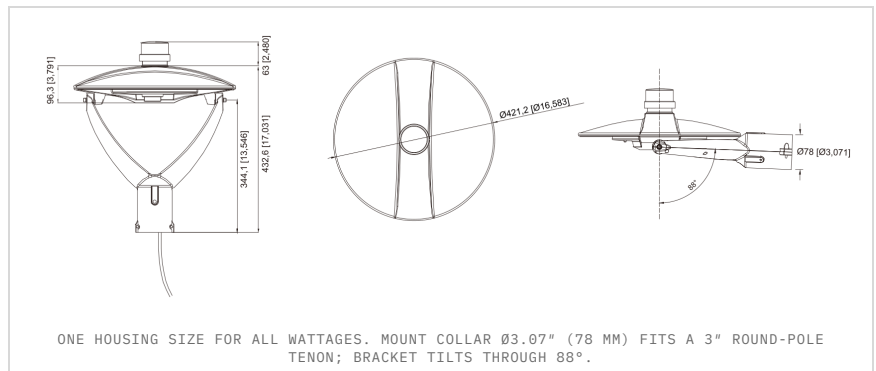

Mounting

FINN 2

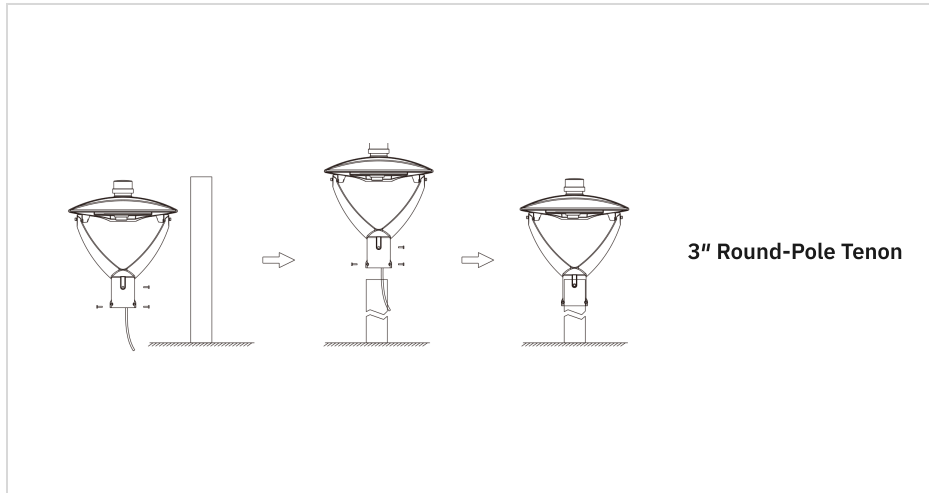


Slides over a 3" round-pole tenon and locks with set screws — 2-3/8" poles use the available adapter.

Options



Photometry

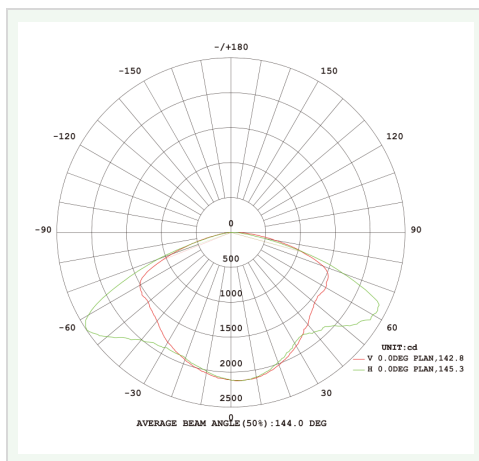

OUTPUT & SUGGESTED MOUNTING HEIGHT

MODEL	SUGGESTED HEIGHT	DELIVERED LUMENS*
W60 (40-60W)	10' - 15'	~5,400 - 8,100 lm
W100 (60-100W)	15' - 20'	~8,100 - 13,500 lm
W150 (120-150W)	20' - 26'	~16,200 - 20,250 lm

* Estimated at 135 lm/W — verify against photometric files for final layouts.

Distribution Type V (144°) **Efficacy** 130-140 lm/W **IES File** On request