


GTG3131E: LED WALL LIGHT





(MRA100A)-[BDF] (MRA100A2B) (MRA200A)-[BDF] (MRA200A2B)

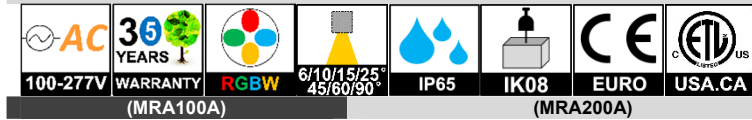

DIMENSION : [UNIT: MM]

(MRA100A)

(MRA200A)

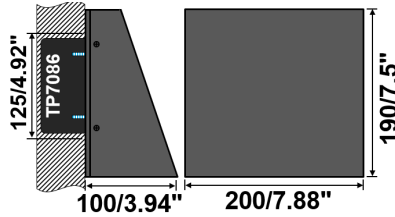

INTRODUCTION

FEATURE

Advanced LED Lighting Technology
 The Uniform Quality by Skilled Production
 The Perfect Interior & Exterior Slim Lighting Fixture
 Long Lifespan > 50,000hours
 Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
 Driver Brand: GUBO
 Housing: Die-casted Aluminum Housing
 Optics: High Efficiency PMMA Lens
 Diffuser: Clear Glass Diffuser

INSTALLATION

Suitable for Balcony, Veranda, External Wall.....

- [FWA]: Wall Surface Mounted
- [FJP]: Fixing Plate on JBOX/Outlet Box
- [PSA]: Aluminum Straight Bollard

NOTES: Custom Installation and Accessories
 Referred to Another Catalogue of Fixing Kits.

STANDARD

Designed and Manufactured to Comply with
 CE/RoHS/ETL/FCC/SAA
 IP65 Protection, Class I Electric

OPTION

LED CCT: 1,800K~10,000K/R/G/B/Y
 Personal Eye Protection Standard: RG0 (EN166:2001)
 [CRI]: [E] RA80, [G] RA90, [H] RA97(RG0)
 F1: Custom Housing Finish Colors by RAL Code
 [GBG]: Custom Baffle Finish Colors by RAL Code

WHITE	BLACK	GREY	DARK GREY	BRASS
RAL9010P	RAL9005P	RAL7042P	RAL7016P	RAL1024P

CASE STUDY:



MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT [V]
GTG3131A-MRA100A2B	30W [35W] [25W] [20W] [15W]	36x2W SMD3030	E2700K	RA80	2380	> 0.9	[Lens] BL15D:15° BL25D:25° BL30D:30° BL45D:45° BL60D:60° BL90D:90°	[*CDT]:TRIAC(10%) [*CDV0]:0~10V(8%) [*CDV0]:0~10V(1%) [*CDV1]:1~10V(10%) [*CDP]:PWM(1%)	*AC100~277V [AC100~240V] [AC100~347V] 50/60Hz
			E3000K	RA80	2540				
			E3500K	RA80	2540				
			E4000K	RA80	2680				
			E5000K	RA80	2680				
			E6500K	RA80	2640				
			G2500K	RA90	1530	> 0.9			
			G2700K	RA90	1910				
			G3000K	RA90	2060				
			G3500K	RA90	2060				
			G4000K	RA90	2210				
			G5000K	RA90	2210	> 0.9			
			G6500K	RA90	2160				
2C@30W	TWG	G2700K G6500K	RA90	1710					
3C@30W	RGB	620nm 520nm 460nm	\	1710					
4C@30W	RGBWG	620nm 520nm 460nm G2700K	\	1710					
4C@30W	RGBA	620nm 520nm 460nm 590nm	\	1710					
GTG3131A-MRA200A2B	60W [50W] [40W] [30W]	72x2W SMD3030	E2700K	RA80	4770	> 0.9	[Oval] BLV15x60° [Frosted] BDF:100° [Louver] BGL LM-20%	Following by Remote Driver [+CDT]:TRIAC(1%) [+CDV0]:0~10V(1%) [+CDX]:DMX512(1%) [+CDA]:DALI(1%) [+CRZ]:Zigbee(1%) [+CRB]:Bluetooth(1%)	[+CV DC12V] [+CV DC24V] [+CV DC42V]
			E3000K	RA80	5070				
			E3500K	RA80	5070				
			E4000K	RA80	5370				
			E5000K	RA80	5370				
			E6500K	RA80	5280				
			G2500K	RA90	2260	> 0.9			
			G2700K	RA90	3820				
			G3000K	RA90	4120				
			G3500K	RA90	4120				
			G4000K	RA90	4410				
			G5000K	RA90	4410	> 0.9			
			G6500K	RA90	4330				
2C@60W	TWG	G2700K G6500K	RA90	3410					
3C@60W	RGB	620nm 520nm 460nm	\	3410					
4C@60W	RGBWG	620nm 520nm 460nm G2700K	\	3410					
4C@60W	RGBA	620nm 520nm 460nm 590nm	\	3410					

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.