

FINN 2

LED Area Luminaire

A UFO-style round LED post top for walkways, parking areas, community grounds, and plazas. Three power-select models cover 40–150W from one Ø16.6" aluminum housing with PC lens, with a built-in power switch and 3CCT switch (3000/4000/5000K) set at install. The slip-fitter base fits a 3" round-pole tenon — 2-3/8" adapter available — and the 88° turnable bracket folds the head flat to save package volume. Photocell, motion sensor, and WiFi camera options.

- UFO-style round post top — Ø16.6" aluminum housing with PC lens
- Three power-select models: W60 (40/50/60W) · W100 (60/80/100W) · W150 (120/135/150W)
- 3CCT switch — 3000K / 4000K / 5000K field-selectable
- 130–140 lm/W efficacy — up to ~21,000 lm at 150W
- 88° turnable bracket — head folds flat to cut package volume
- Fits 3" round-pole tenon (2-3/8" adapter) · photocell, motion sensor, WiFi camera optional
- -40°F to +113°F rated · UL, DLC, CE, RoHS



LUMEN OUTPUT	Up to ~21,000 lm	FINISH	Bronze, Black
EFFICACY	130–140 lm/W	OPERATING TEMP	-40°F to +113°F
COLOR TEMP / CCT	3000K / 4000K / 5000K / 3CCT switch	MATERIAL	Aluminum alloy · PC lens
CRI	70+ (Ra)	LENS	PC lens
DISTRIBUTION	Type V (144°)	MOUNTING	Slip fitter — 3" round-pole tenon (standard) · 2-3/8" tenon adapter available
LED SOURCE	Samsung SMD 2835 (or equal)	DIMENSIONS	Ø16.58" (421.2 mm) × 17.03" (432.6 mm) H
WATTAGE	40 – 150W (three power-select models)	WEIGHT	13.9 – 14.8 lb
VOLTAGE	120–277V · 120–347V · 180–480V	LIFETIME	50,000 hrs
DRIVER	Meanwell / SOSEN / ZHIHE · THD <15%	WARRANTY	5-Year Limited

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

● **In stock** — all other configurations built to order.

MODEL	WATTAGE	CCT	VOLTAGE	DISTRIBUTION	MOUNTING	OPTIONS	FINISH
FINN 2	W60 40/50/60W ● W100 60/80/100W W150 120/135/150W	● 30 3000K ● 40 4000K ● 50 5000K ● 3CCT (3000/4000/5000K)	● U 120-277V E 120-347V H 180-480V	● T5 Type V	SF3 Slip ● fitter · 3" tenon SF2 2-3/8" tenon adapter*	● N None ● PC Photocell sensor ● MS Motion sensor CAM WiFi camera	BZ Bronze ● BK Black

* SF2 uses a 2-3/8" tenon adapter on the standard 3" slip-fitter base.

Build Your Order Code — example values shown in grey


MODEL	WATTAGE	CCT	VOLTAGE	DISTRIBUTION	MOUNTING	OPTIONS	FINISH
FINN 2	W100	30	U	T5	SF3	N	BZ

STANDARD FINISHES


BZ
BronzeBK
Black

DIMENSIONS & WEIGHT

MODEL	DIAMETER	HEIGHT	MOUNT COLLAR	WEIGHT (NET)
FINN 2 (40-150W)	Ø16.58" (421.2 mm)	17.03" (432.6 mm)	Ø3.07" (78 mm)	13.9 - 14.8 lb

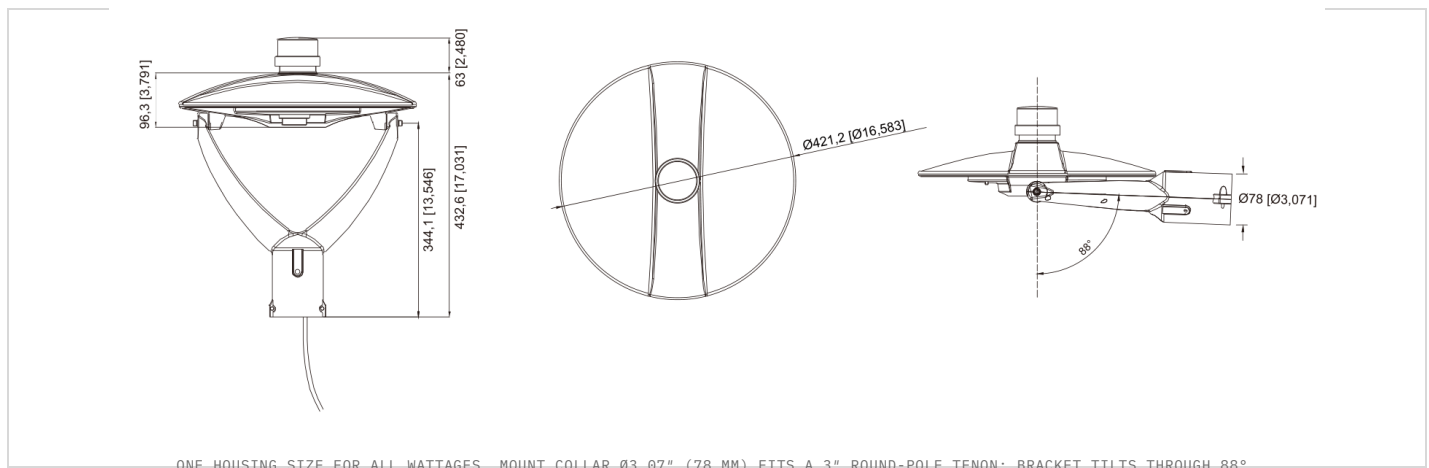

MOUNTING

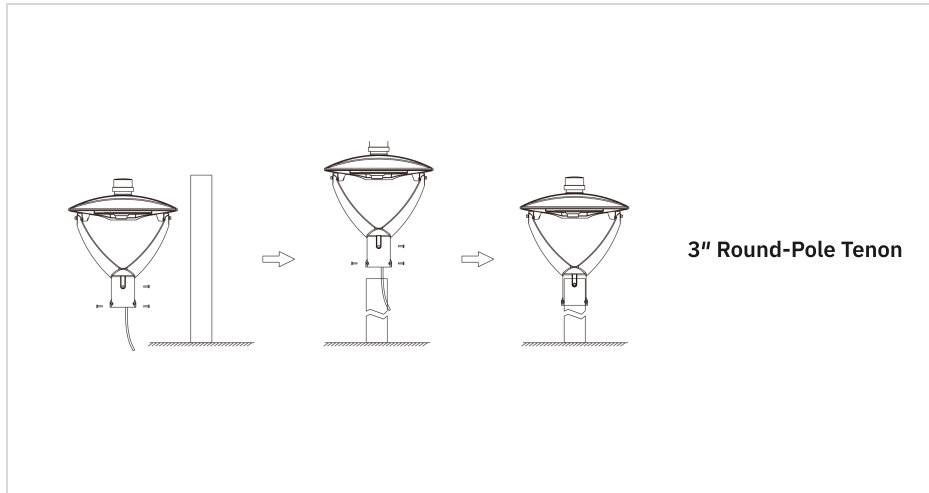


Slides over a 3" round-pole tenon and locks with set screws — 2-3/8" poles use the available adapter.

OPTIONS



PHOTOMETRY

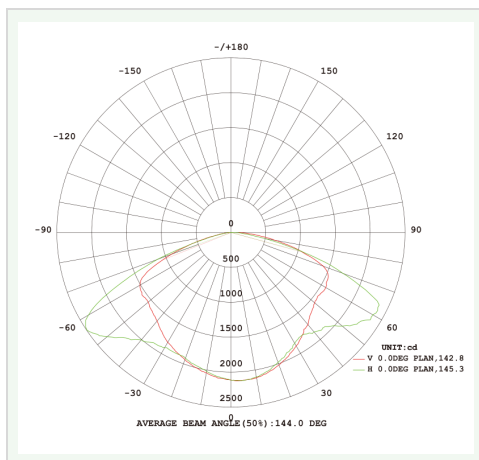

OUTPUT & SUGGESTED MOUNTING HEIGHT

MODEL	SUGGESTED HEIGHT	DELIVERED LUMENS*
W60 (40-60W)	10' - 15'	~5,400 - 8,100 lm
W100 (60-100W)	15' - 20'	~8,100 - 13,500 lm
W150 (120-150W)	20' - 26'	~16,200 - 20,250 lm

* Estimated at 135 lm/W — verify against photometric files for final layouts.

Distribution Type V (144°) **Efficacy** 130-140 lm/W **IES File** On request