

LED WALL LIGHT

| | | | | | | | |
|---------------------|---------|---------------|------|--------------------|------|-------------|-------|
| | | | | | | | |
| 100-277V | SMD2835 | WARRANTY (BC) | 360° | IP20 | EURO | USA.CA (BC) | IECEE |
| BRUSH SILVER FINISH | | | | BRUSH BLACK FINISH | | | |



INTRODUCTION

FEATURE

- Easy Fast Installation and Maintenance Freely
- Excellent Uniform Structure of LED Technology
- Color Rendering Index Ra>90
- Working Temperature: -30°C~50°C

MATERIAL & FINISH

- LED Brand: SANAN (LM80)
- Flicker-free Driver Brand: GUBO
- Fixture: Aluminum
- Diffuser: Frosted PMMA Diffuser

INSTALLATION

- Surface Mounted
- Suitable for Interior Wall Light, like Bedroom, Corridor, Living Room...

STANDARD


- Designed and Manufactured to Comply with TUV/CE/RoHS/CB/SAA/Erp/cETL/FCC
- IP20 Protection, Class II Electric

OPTION

- LED CCT: 1800K/2700K/3500K/5000K/6000K
- Fixture Finish Color:

| | | | |
|-------------|-------------|----------------|----------------|
| WHITE [HWT] | BLACK [HBK] | BRUSHED [HSVB] | BRUSHED [HBKB] |
| | | | |

DIMENSION: [UNIT: MM]

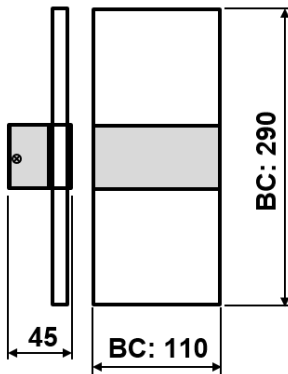

US JBOX
Mounting Bracket
[MJ-RA102]
D102*1.4MM



CASE STUDY



| MODEL | POWER [W] | LED TYPE | CCT [K] | CRI | LUMEN [LM] | POWER FACTOR | BEAM ANGLE | CONTROL MODE | INPUT [V] |
|--------------------|-----------|-----------------|-----------|------|------------|--------------|------------|---|---|
| GTF7131BC-6W-WW30 | 6W | 40x0.5W SMD2835 | 3000K | RA90 | 380 | >0.9 | 360° | 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE | AC220~240V [AC100~277V] 50/60Hz [DC24V] |
| GTF7131BC-6W-NW40 | | | 4000K | | 410 | | | | |
| GTF7131BC-6W-CW60 | | | 6000K | | 430 | | | | |
| GTF7131BC-6W-TW | 2C@6W | 24TW | WW27 CW65 | RA90 | 240 | >0.9 | | | |
| GTF7131BC-6W-RGBW | 4C@6W | 24RGBW | R G B W | \ | 180 | >0.5 | | | |
| GTF7131BC-10W-WW30 | 10W | 40x0.5W SMD2835 | 3000K | RA90 | 630 | >0.9 | | | |
| GTF7131BC-10W-NW40 | | | 4000K | | 680 | | | | |
| GTF7131BC-10W-CW60 | | | 6000K | | 710 | | | | |
| GTF7131BC-10W-TW | 2C@10W | 24TW | WW27 CW65 | RA90 | 480 | >0.9 | | | |
| GTF7131BC-10W-RGBW | 4C@10W | 24RGBW | R G B W | \ | 360 | >0.5 | | | |

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment. Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.