

ZED

LED Linear Hanging (Suspended) Light



Top features

- 3 Power and 4 CCT field-adjustable.
- Selectable direct-Indirect light distributions.
- Fast and seamless continuous runs available.
- I / L / T / X / Y / 120° connectors available. (I am standard.)
- Multiple mount methods.
- Sensor solution ready.
- EM available on 4ft and 8ft models
- DLC Dual-Listed, maximize your rebates.



Model Specification


Model	Size	Input Voltage	Power (Tunable)	CCT (Tunable)	PF	Efficacy	Ra	Dimmable	Warranty
ZED-2FT-25W-L-H	2FT	AC120-277V	15/20/25W	3500/4000/5000/6500K	>0.9	>130LPW	>80	0-10V	5 years
ZED-4FT-50W-L-H	4FT		40/45/50W						
ZED-8FT-80W-L-H	8FT		60/70/80W						

Fast and seamless connection



Screw-free to remove end-cover.
Tool-free press lock connection.

Distributions



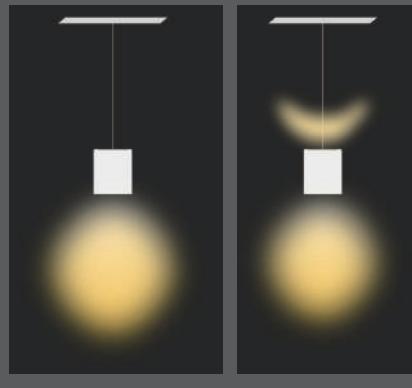


Direct-Indirect flux ratio
adjustable



Dimensions

Length

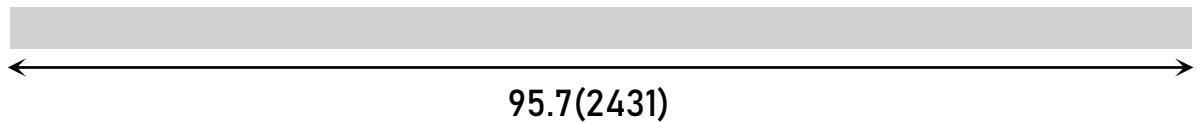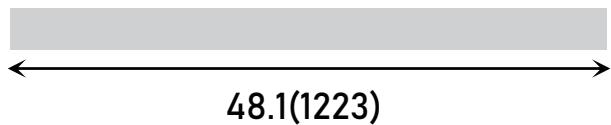

Height and Width



Size unit: inch(mm)

Mounting


Suspended mount, Surface mount, Wall mount, and Recessed mount are available.
The other mount kits except suspended mount are purchased separately.




Suspended mount



Surface mount



Wall mount

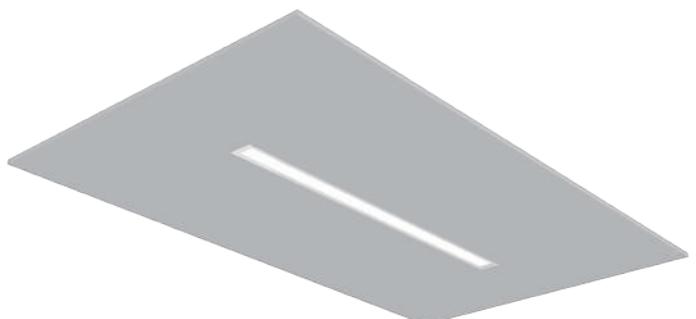

Recessed mount

Connections




"I" connecting




"L" connecting with
"L" shape connector



"T" connecting with
"T" shape connector

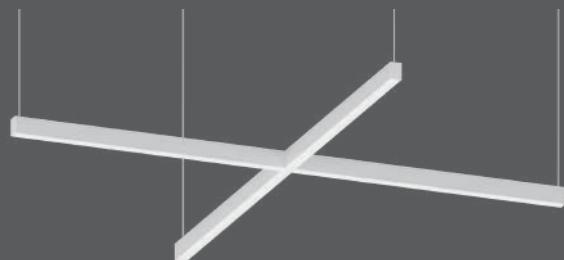


"X" connecting with
"X" shape connector

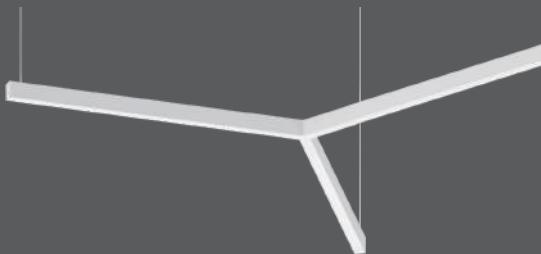

"Y" connecting with
"Y" shape connector



"120°" connecting with
"120°" shape connector








Change to DIY soft lens which can be cut by end-users for seamless continuous runs. Total connected load is <500W at 120V and $\leq 1\ 000\text{W}$ at 277V which included the connectors

Max. No.* of each Power feed






Size / Power	AC 120V	AC 277V
2FT / 25W	19 PCS	38 PCS
4FT / 50W	9 PCS	19 PCS
8FT / 80W	6 PCS	12 PCS

Connector dimensions

Size unit: inch(mm)

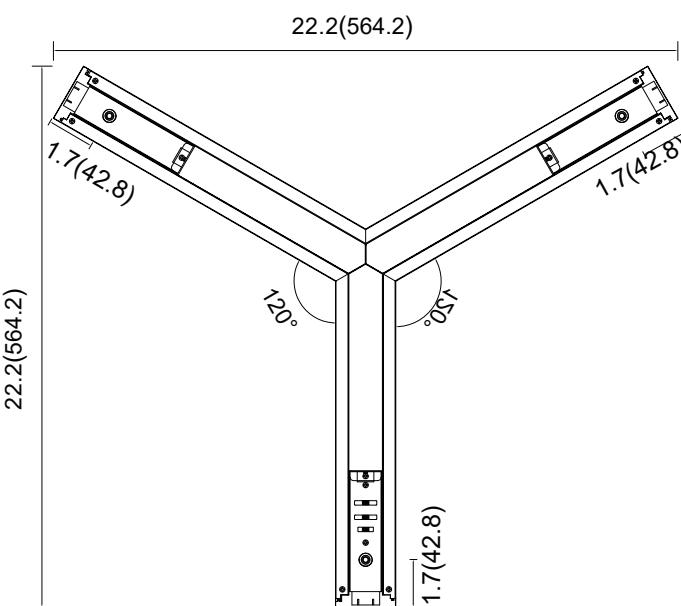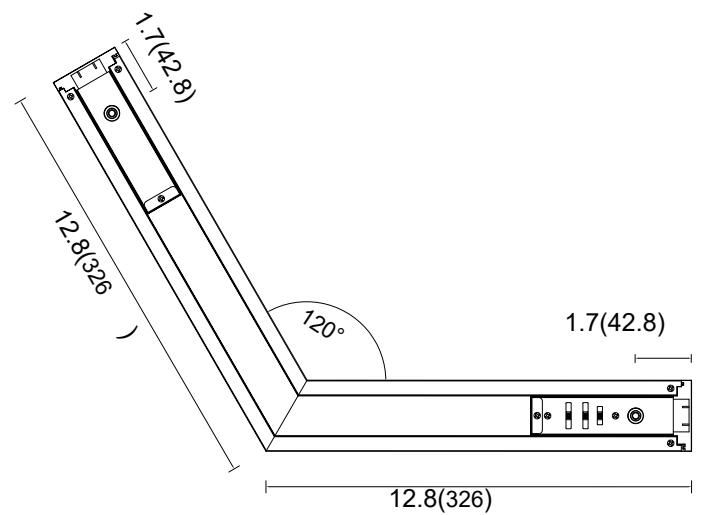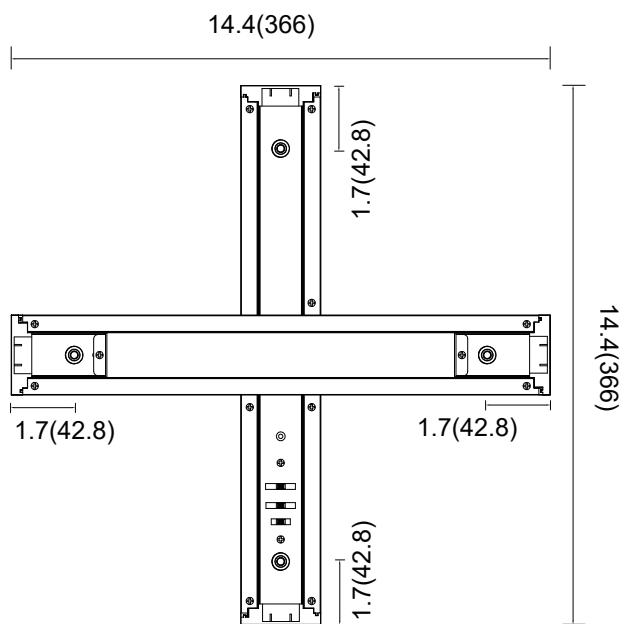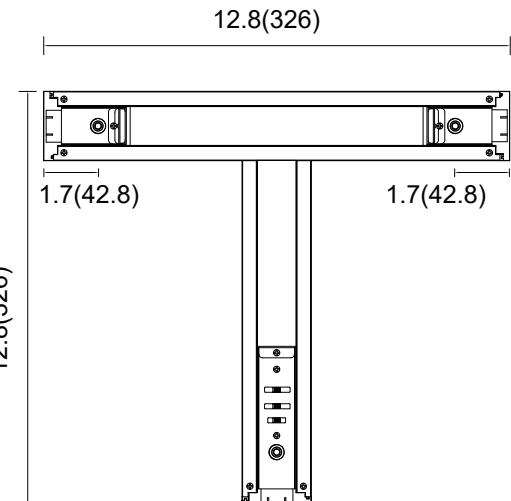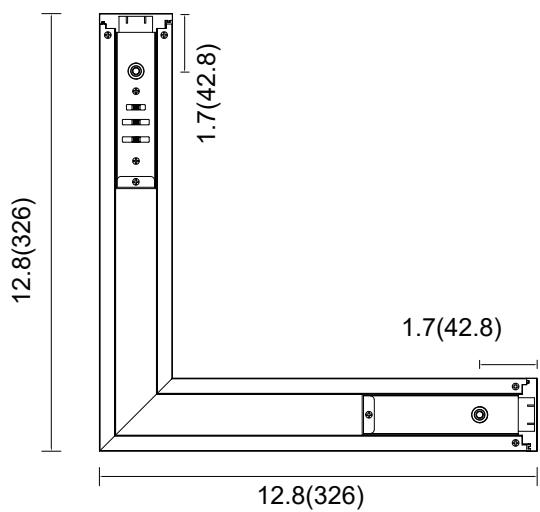

Installation accessories optional
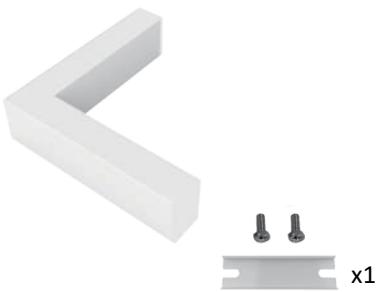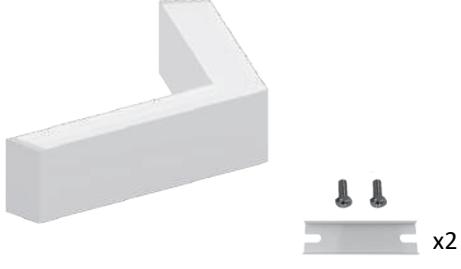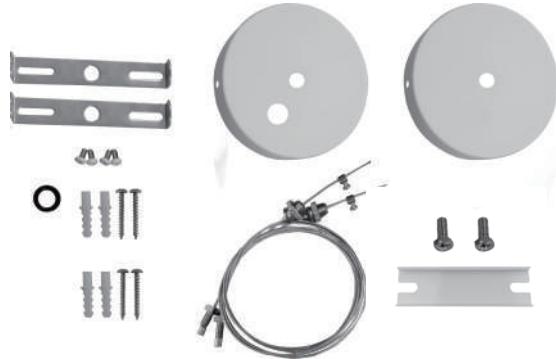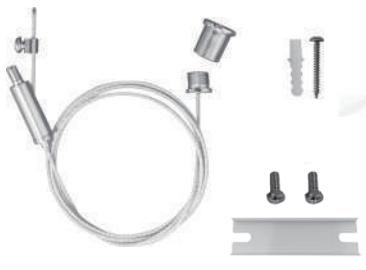
<p>“L” connector</p>  <p>x1</p>	<p>“T” connector</p>  <p>x2</p>	<p>“X” connector</p>  <p>x2</p>
<p>“Y” connector</p>  <p>x2</p>	<p>“120°” connector</p>  <p>x2</p>	
<p>Suspension mount kit Standard equipment. Others are optional.</p>  <p>Power cord</p>		
<p>Cable kit for connection</p> 	<p>AC sensor installation canopy kit (sensor installed)</p> 	<p>Soft DIY-cut diffuser, 49.2' length per roll</p> 

Note: Subject to change without notice. Errors and omission excepted.


Always make sure to use the most recent release

Packing/Weight


Part NO.	Outer Carton Size (LxWxH)	Qty/Carton (pcs)	Net weight (kg)(lbs)	Gross weight (kg)(lbs)	20GP (QTY)	40HQ (QTY)
ZED-2FT-25W-L-H	876x192x202mm (34.49"x7.56"x7.95")	6PCS	1.3 kg (2.87 lbs)	12 kg (26.46 lbs)	4992	11172
ZED-4FT-50W-L-H	1476x192x202mm (58.11"x7.56"x7.95")	6PCS	2.2 kg (4.85 lbs)	18 kg (39.68 lbs)	2952	6708
ZED-8FT-80W-L-H	2475x135x229mm (97.44"x5.31"x9.02")	4PCS	4.1 kg (9.04 lbs)	20 kg (44.09 lbs)	1376	3340

Packing

2FT

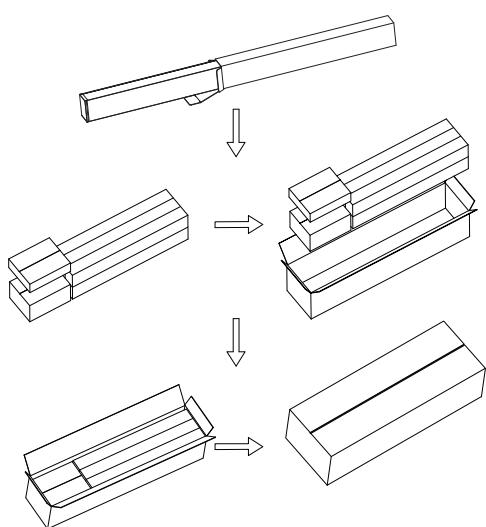

4FT

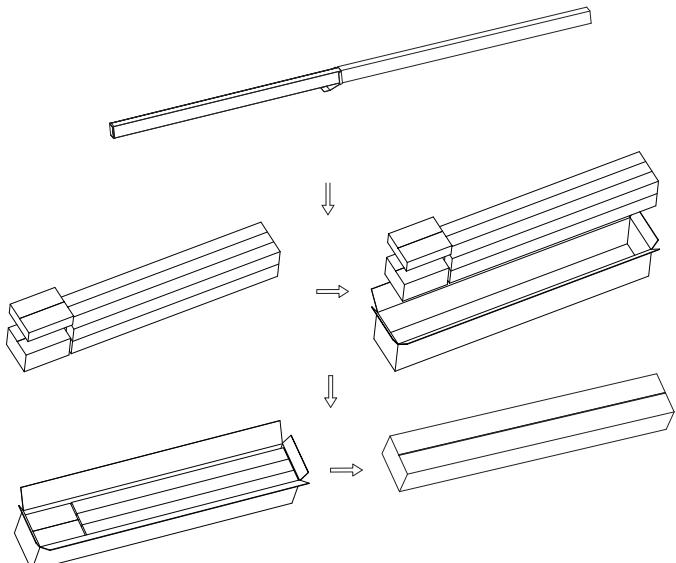

8FT

