

ULRIK

Watt/CCT Selectable Full Cutoff Wall Pack

A full-cutoff wall pack for indoor or outdoor (wet location) use — museums, galleries, shopping malls, office buildings and façades. Zero uplight optics, with both power and colour temperature set on the fixture by sliding switch.

- Field-selectable power — 4-position switch (100 / 80 / 60 / 40%)
- Field-selectable CCT — 3-position switch (3000K / 4000K / 5000K)
- 28 / 42 / 56 / 70W · 4,116 – 9,800 lm · up to 147 lm/W
- Full cutoff · zero uplight · 99.5° × 77.6° distribution
- Ships preset at 70W, 4000K
- Lumileds 2835 LEDs · 1–10V continuous dimming · PF >0.95



UL

RoHS

DLC Premium


Wet Location

LUMEN OUTPUT	Up to 9,800 lm
EFFICACY	Up to 147 lm/W
COLOR TEMP / CCT	3000K / 4000K / 5000K (field-selectable)
CRI	>70 (Ra)
DISTRIBUTION	99.5° × 77.6° · full cutoff
LED SOURCE	Lumileds 2835
WATTAGE	28 / 42 / 56 / 70W (field-selectable)
VOLTAGE	AC 120–277V
POWER FACTOR	>0.95

DIMMING	1–10V continuous
DRIVER	High-efficiency · >89% driver efficiency
FINISH	Dark Bronze, White, Black, Silver
IP / IMPACT	Wet Location
MATERIAL	Die-cast aluminum · PC lens
DIMENSIONS	13.97" W × 4.98" H × 8.18" D
WEIGHT	6.26 lbs
LIFETIME	>50,000 hrs
WARRANTY	5-Year Limited

FIELD SELECTION

Power and CCT are set on the fixture with sliding switches.



**WATT/CCT
Selector Switch**
4-position power · 3-position CCT

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.





● **In stock** — all other configurations built to order.

MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	OPTIONS	FINISH
ULRIK	● 70 28/42/56/70W	● U 120-277V	● 3CCT 3000/4000/5000K	● DV 1-10V Dimming	● N None PC Photocell	● DBZ Dark Bronze WH White BK Black SM Silver

Build Your Order Code — example values shown in grey


MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	OPTIONS	FINISH
ULRIK	70	U	3CCT	DV	N	DBZ

STANDARD FINISHES

DBZ
Dark BronzeWH
WhiteBK
BlackSM
Silver

DIMENSIONS & WEIGHT

MEASUREMENT	VALUE
Width	13.97" (347.8 mm)
Height	4.98" (126.4 mm)
Depth (projection)	8.18" (207.7 mm)
Net weight	6.26 lbs (2.8 kg)

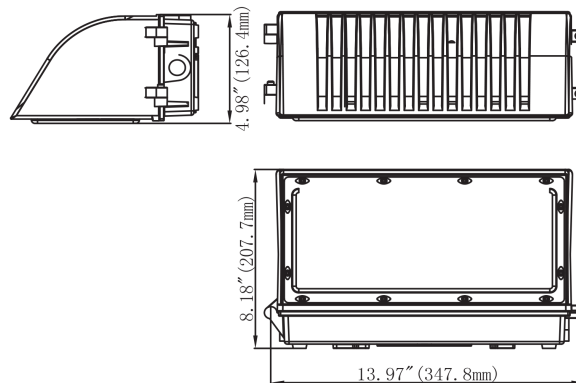

OPTIONS





CONTROLS

DV 1–10V continuous dimming
— standard on all models

OPTIONS

PC Photocell
N None

PHOTOMETRY

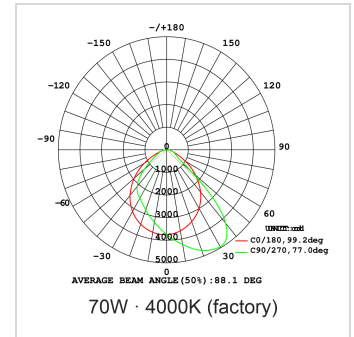

DELIVERED LUMENS

Beam	CCT	28W	42W	56W	70W
99.5° × 77.6°	4000K	4,116	6,174	7,840	9,800

Switch positions 40 / 60 / 80 / 100%. Ships preset at 70W, 4000K. Photometry shown at 4000K.

DISTRIBUTION 99.5° × 77.6° · full cutoff **EFFICACY** Up to 147 lm/W **IES FILE** Available on request