

INTRODUCTION

FEATURE

Durable Optimized LED Lighting Design
 Skilled Manufacturing Technology
 Upgrade LED Lighting Design
 Easy Installation and Maintenance
 Long Lifespan >50,000hours
 Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
 Driver Brand: GUBO
 Housing: Die-casted Aluminum
 Optics: High Efficiency PC Lens

INSTALLATION

Installation: Surface Mounted
 [FBB]: JBOX Mounting Kits
Notes: Remote Driver need be in Deep JBOX
 Suitable for Balcony, Veranda, External Wall.....

STANDARD

Designed and Manufactured to Comply with
 CE/RoHS/CB/cETL/SAA Standard
 Withstand Voltage: 3.75KV, Surge: 6KV
 IP65 Protection, Class I Electric

OPTION

LED CCT: 1,800K~10,000K/R/G/B/Y
 [CRI]: [E] RA80, [G] RA90, [H] RA97(RG0)
 LED Grown Light: **Full Spectrum** 380nm~840nm
 Housing Color Finish: (Colors in RAL)

WHITE BLACK GREY DARK GREY BRASS
 RAL9010P RAL9005P RAL7042P RAL7016P RAL1024P

CASE STUDY: (MCA150A)




CASE STUDY: (MSA150A)



(MSA150A)

DIMENSION: [UNIT: MM]

(MCA150A)

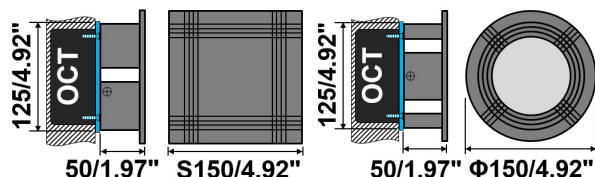


MODEL	POWER 【W】	LED TYPE	CCT 【K】		CRI	FLUX 【LM】	POWER FACTOR	BEAM ANBGLE	OPTIONAL DIMMING	INPUT 【V】
GTG3406A-MCA150A-MSA150A-L1D	1x2W	1x5W	G2700K		RA90	160	> 0.4	1x3°	[+CDP]:PWM(1%) [+CDX]:DMX512(1%)	
			G3000K		RA90	167				
			G4000K		RA90	165				
			G6500K		RA90	165				
	2C@(1x2W)	1TWG	G2700K	G6500K	RA90	120	> 0.5			
	4C@(1x2W)	1RGBWG	620nm	520nm	455nm	G2700K	\	100	> 0.4	
GTG3406A-MCA150A-MSA150A-L2D90D L2D180D	2x2W	2x5W	G2700K		RA90	2x160	> 0.5	2x3°	[Following by Remote Driver] [CDT]:TRIAC(15%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CRZ]:Zigbee(1%) [CRB]:Bluetooth(1%) [CRF]:2.4G RF(1%)	*AC100~277V [AC100~240V] [AC100~347V] 50/60Hz
			G3000K		RA90	2x167				
			G4000K		RA90	2x165				
			G6500K		RA90	2x165				
	2C@(2x2W)	2TWG	G2700K	G6500K	RA90	2x120	> 0.5			
	4C@(2x2W)	2RGBWG	620nm	520nm	455nm	G2700K	\	2x100	> 0.4	
GTG3406A-MCA150A-MSA150A-L3D90D	3x2W	3x5W	G2700K		RA90	3x160	> 0.5	3x3°		[CV DC12V] [+CV DC24V] [CV DC42V]
			G3000K		RA90	3x167				
			G4000K		RA90	3x165				
			G6500K		RA90	3x165				
	2C@(2x2W)	3TWG	G2700K	G6500K	RA90	3x120	> 0.5			
	4C@(2x2W)	3RGBWG	620nm	520nm	455nm	G2700K	\	3x100	> 0.4	
GTG3406A-MCA150A-MSA150A-L4D90D	4x2W	4x5W	G2700K		RA90	4x160	> 0.6	4x3°		
			G3000K		RA90	4x167				
			G4000K		RA90	4x165				
			G6500K		RA90	4x165				
	2C@(4x2W)	4TWG	G2700K	G6500K	RA90	4x120	> 0.6			
	4C@(4x2W)	4RGBWG	620nm	520nm	455nm	G2700K	\	4x100	> 0.6	

NOTE:


All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

GTG3406B: LED WALL LIGHT

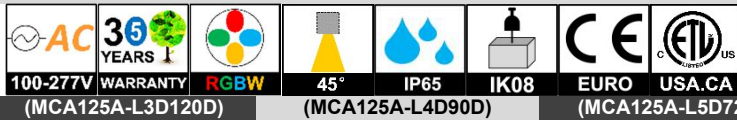

DIMENSION: [UNIT: MM]
(MCA125A)

[FJP]

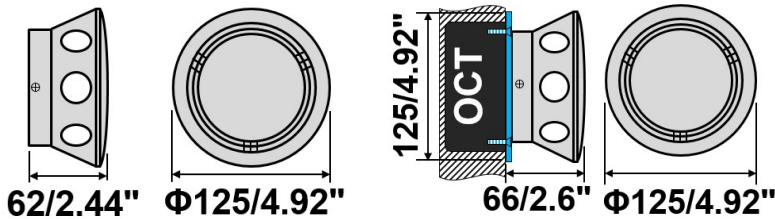

INTRODUCTION

FEATURE

Durable Optimized LED Lighting Design
Skilled Manufacturing Technology
Upgrade LED Lighting Design
Easy Installation and Maintenance
Long Lifespan >50,000hours
Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
Driver Brand: GUBO
Housing: Die-casted Aluminum
Optics: High Efficiency PC Lens

INSTALLATION

Installation: Surface Mounted
[FJP]: JBOX Mounting Plate
Notes: Remote Driver need be in Deep JBOX
Suitable for Balcony, Veranda, External Wall.....

STANDARD


Designed and Manufactured to Comply with
CE/RoHS/CB/cETL/SAA Standard
Withstand Voltage: 3.75KV, Surge: 6KV
IP65 Protection, Class I Electric

OPTION

LED CCT: 1,800K~10,000K/R/G/B/Y
[CRI]: [E] RA80, [G] RA90, [H] RA97(RG0)
Housing Color Finish: (Colors in RAL)

WHITE **BLACK** **GREY** **DARK GREY** **BRASS**
RAL9010P RAL9005P RAL7042P RAL7016P RAL1024P

CASE STUDY:

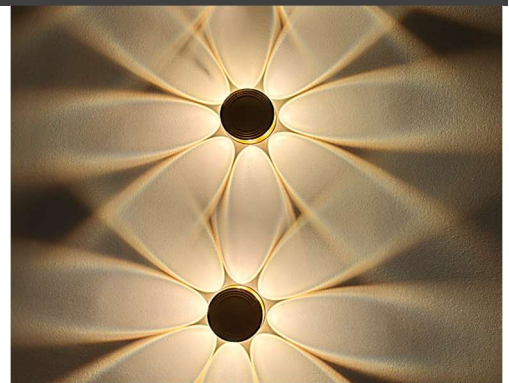

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT [V]
GTG3406B-MCA125A-L3D120D	3x2W	3x5W	G2700K	RA90	3x160	>0.6	3x45°		
			G3000K	RA90	3x167				
			G4000K	RA90	3x165				
			G6500K	RA90	3x165				
			G2700K	RA90	3x120				
GTG3406B-MCA125A-L4D90D	4x2W	4x5W	G2700K	RA90	4x160	>0.4	4x45°	[+CDP]:PWM(1%)	
			G3000K	RA90	4x167				
			G4000K	RA90	4x165				
			G6500K	RA90	4x165				
			G2700K	RA90	4x120				
GTG3406B-MCA125A-L5D72D	5x2W	5x5W	G2700K	RA90	5x160	>0.5	5x45°	[Following by Remote Driver] [CDT]:TRIAC(15%) [CDV]:0~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CRZ]:Zigbee(1%) [CRB]:Bluetooth(1%) [CRF]:2.4G RF(1%)	AC100~277V [AC100~240V] [AC100~347V] 50/60Hz
			G3000K	RA90	5x167				
			G4000K	RA90	5x165				
			G6500K	RA90	5x165				
			G2700K	RA90	5x120				
GTG3406B-MCA125A-L6D60D	6x2W	6x5W	G2700K	RA90	6x160	>0.5	6x45°		[CV DC12V] [+CV DC24V] [CV DC42V]
			G3000K	RA90	6x167				
			G4000K	RA90	6x165				
			G6500K	RA90	6x165				
			G2700K	RA90	6x120				
GTG3406B-MCA125A-L8D45D	8x2W	8x5W	G2700K	RA90	8x160	>0.5	8x45°		
			G3000K	RA90	8x167				
			G4000K	RA90	8x165				
			G6500K	RA90	8x165				
			G2700K	RA90	8x120				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

INTRODUCTION

FEATURE

Durable Optimized LED Lighting Design
Skilled Manufacturing Technology
Upgrade LED Lighting Design
Easy Installation and Maintenance
Long Lifespan >50,000hours
Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
Driver Brand: GUBO
Housing: Die-casted Aluminum
Optics: High Efficiency PC Lens

INSTALLATION

Installation: Surface Mounted
[FJP]: JBOX Mounting Plate
Suitable for Balcony, Veranda, External Wall.....

STANDARD

Designed and Manufactured to Comply with
CE/RoHS/CB/cETL/SAA Standard
Withstand Voltage: 3.75KV, Surge: 6KV
IP65 Protection, Class I Electric

OPTION

LED CCT: 1,800K~10,000K/R/G/B/Y
[CRI]: [E] RA80, [G] RA90, [H] RA97(RG0)
LED Grown Light: **Full Spectrum** 380nm~840nm
Housing Color Finish: (Colors in RAL)

WHITE	BLACK	GREY	DARK GREY	BRASS
RAL9010P	RAL9005P	RAL7042P	RAL7016P	RAL1024P

CASE STUDY:



GTG3406C: LED WALL LIGHT

100-277V	WARRANTY	RGBW	45°	IP65	IK08	EURO	USA.CA	

(MCA100A-L2D180D)	DIMENSION: [MM]	(MCB100A-L4D90D)	DIMENSION: [MM]
(MSA100A-L4D90D)	DIMENSION: [MM]	(MSB100A-L4D90D)	DIMENSION
(MRA50D-L1D)	DIMENSION: [MM]	(MRA50A-L1D)	DIMENSION
(MRH50A-L2D180A)	DIMENSION: [MM]	(MRH50D-L2D180A)	DIMENSION: [MM]
(MRH50R-L2D180A)	DIMENSION: [MM]		

MODEL	POWER 【W】	LED TYPE	CCT 【K】		CRI	FLUX 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】
GTG3406C- MRA50A- MRA50D- L1D	1x2W	1x5W	G2700K		RA90	160	>0.5	1x45°	[+CDP]:PWM(1%) [Following by Remote Driver] [CDT]:TRIAC(15%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CRZ]:Zigbee(1%) [CRB]:Bluetooth(1%) [CRF]:2.4G RF(1%)	*AC100~277V [AC100~240V] [AC100~347V] 50/60Hz [CV DC12V] [+CV DC24V] [CV DC42V]
			G3000K		RA90	167				
			G3500K		RA90	167				
			G4000K		RA90	180				
			G5000K		RA90	180				
	G6500K		RA90	180						
	2C@(2W)	1TWG	G2700K	G6500K	RA90	120	>0.5			
4C@(2W)	1RGBWG	620nm	520nm	455nm	G2700K	\	100	>0.4		
GTG3406C- MRH50A- MRH50D- MRH50R- L2D180D	2x2W	2x5W	G2700K		RA90	2x160	>0.5	2x45°		
			G3000K		RA90	2x167				
			G3500K		RA90	2x167				
			G4000K		RA90	2x180				
			G5000K		RA90	2x180				
	G6500K		RA90	2x180						
	2C@(2x2W)	2TWG	G2700K	G6500K	RA90	2x120	>0.5			
4C@(2x2W)	2RGBWG	620nm	520nm	455nm	G2700K	\	2x100	>0.4		
GTG3406C- MCB100A- MSA100A- L4D90D	4x2W	4x5W	G2700K		RA90	4x160	>0.5	4x45°		
			G3000K		RA90	4x160				
			G3500K		RA90	4x167				
			G4000K		RA90	4x180				
			G5000K		RA90	4x180				
	G6500K		RA90	4x180						
	2C@(4x2W)	4TWG	G2700K	G6500K	RA90	4x120	>0.5			
4C@(4x2W)	4RGBWG	620nm	520nm	455nm	G2700K	\	4x100	>0.4		
GTG3406C- MSB100A- L4D90D	4x2x2W	8x5W	G2700K		RA90	4x2x160	>0.5	4x2x45°		
			G3000K		RA90	4x2x167				
			G3500K		RA90	4x2x167				
			G4000K		RA90	4x2x180				
			G5000K		RA90	4x2x180				
	G6500K		RA90	4x2x180						
	2C@(4x2x2W)	8TWG	G2700K	G6500K	RA90	4x2x120	>0.5			
4C@(4x2x2W)	8RGBWG	620nm	520nm	455nm	G2700K	\	4x2x100	>0.4		

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.