


**GTF3201-201A: INTERIOR CEILING LIGHTING FIXTURE**

**INTRODUCTION**



**FEATURE**

Elegance Design with Durable Quality  
 Long Lifespan >50,000hours  
 Working Temperature: -30°C~50°C

**MAIN MATERIAL**

LED Brand: GUBO  
 Driver Brand: GUBO  
 Housing: Die-casted Aluminum  
 Diffuser: Anti-UV Opal PC Diffuser

**INSTALLATION**

Suitable for Interior Ceiling Lighting  
 [FBJ]: JBOX Mounting Kit  
 [FPW]: Wire Pendant  
 [FFS]: Flush Ceiling Surface Mounted

**STANDARD**

Designed and Manufactured to Comply with  
 TUV/CB/CE/RoHS/SA/Erp/cETL/FCC  
 IP20 Protection, Class I Electrical


**OPTION**

LED CCT: 1,800K~10,000K/R/G/B/Y  
 [CRI]: [E] RA80, [G] RA90, [H] RA97  
 [CSMD]: Dimmable Microwave Motion Sensor  
 Custom Housing Finish: Colors by RAL Code

**Custom Lamp Shade Color Finish:**



**DIMENSION:**

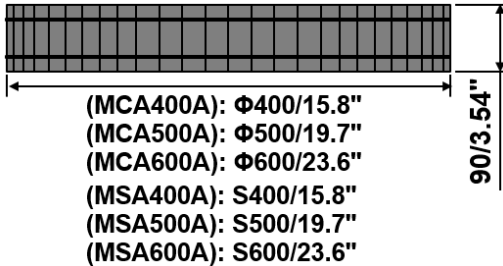

**CASE STUDY:**



MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTO	BEAM ANGLE	OPTIONAL DIMMING	INPUT [V]
GTF3201-201A-MCA400A MSA400A	40W	240x0.5W SMD2835	H2700K	RA97	2730	> 0.9	120°	[CDT]: TRIAC(10%) [CDV]: 0/1~10V(8%) [CDV0]: 0~10V(1%) [CDV1]: 1~10V(15%) [CDX]: DMX512(1%) [CDA]: DALI(1%) [CDZ]: ZIGBEE(1%) [CRF]: 2.4G RF (1%) [CDP]: PWM(1%)	AC100~277V [AC220~240V] [AC110~130V] [AC100~240V] [AC100~347V] 50/60Hz
			H3000K	RA97	2940				
			H3500K	RA97	2940				
			H4000K	RA97	3150				
			H6000K	RA97	3060				
	2C@40W	TWH	H2700K H6000K	RA97	2730	> 0.5			
3C@40W	RGB	620nm 520nm 460nm	\	2730	> 0.4				
4C@40W	RGBWH	620nm 520nm 460nm H2700K	\	2730	> 0.4				
5C@40W	RGBTWH	620nm 520nm 460nm H2700K H6000K	\	2730	> 0.5				
GTF3201-201A-MCA500A MSA500A	50W	300x0.5W SMD2835	H2700K	RA97	3270	> 0.9	120°	Following only For Size "B/C/D/E"	[CV DC12V] [CV DC24V] [CV DC42V]
			H3000K	RA97	3530				
			H3500K	RA97	3530				
			H4000K	RA97	3770				
			H6000K	RA97	3670				
	2C@40W	TWH	H2700K H6000K	RA97	3270	> 0.6			
3C@40W	RGB	620nm 520nm 460nm	\	3270	> 0.5				
4C@40W	RGBWH	620nm 520nm 460nm H2700K	\	3270	> 0.5				
5C@40W	RGBTWH	620nm 520nm 460nm H2700K H6000K	\	3270	> 0.5				
GTF3201-201A-MCA600A MSA600A	60W	360x0.5W SMD2835	H2700K	RA97	4080	> 0.9	120°	Following only For Size "D/E"	[CBE]: Emergency [CBESMD]: EM+Sensor
			H3000K	RA97	4400				
			H3500K	RA97	4400				
			H4000K	RA97	4720				
			H6000K	RA97	4600				
	2C@60W	TWH	H2700K H6000K	RA97	4080	> 0.6			
3C@60W	RGB	620nm 520nm 460nm	\	4080	> 0.5				
4C@60W	RGBWH	620nm 520nm 460nm H2700K	\	4080	> 0.5				
5C@60W	RGBTWH	620nm 520nm 460nm H2700K H6000K	\	4080	> 0.5				

**NOTE:**

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.  
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.