

ULLA 2

LED Area Luminaire

A UFO-style LED post top with an open three-arm cage that carries the finned, die-cast light head — for walkways, communities, house frontages, and building grounds. Two power-selectable models cover 40–150W (W80: 40/60/80W · W150: 75/100/150W), with switch-selectable CCT, and the slip-fitter base slides over a 2-3/8" or 3" round pole tenon and locks with set screws.

- Power selectable on site — W80 model: 40 / 60 / 80W · W150 model: 75 / 100 / 150W
- CCT selectable — 3000K / 4000K / 5000K set by switch (3CCT), or fixed-CCT
- 130–140 lm/W efficacy — up to ~21,000 lm at 150W
- Slip fitter fits 2-3/8" or 3" round tenon — locks with integral set screws
- 0–10V dimming · photocell, motion sensor, and Bluetooth mesh app control options
- Die-cast ADC12 aluminum + tempered glass · -40°F rated · ETL, DLC, CE, RoHS



cETLus

DLC

CE

RoHS

LUMEN OUTPUT	Up to ~21,000 lm
EFFICACY	130–140 lm/W
COLOR TEMP / CCT	3000K / 4000K / 5000K · 3CCT (3000/4000/5000K)
COLOR QUALITY / CRI	70+ (Ra)
LED SOURCE	Samsung SMD 2835 (or equal)
WATTAGE	40/60/80W (W80) · 75/100/150W (W150)
VOLTAGE	120–277V · 120–347V · 180–480V
DIMMING / CONTROLS	0–10V
DRIVER	SOSEN / ZHIHE (or equal)

FINISH	Black, Bronze
OPERATING TEMP	–40°F to +113°F
MATERIAL	Die-cast aluminum (ADC12) · Tempered glass
LENS	Tempered glass
MOUNTING	Slip fitter — 2-3/8" or 3" round tenon
DIMENSIONS	Ø 14.17" × 19.84" H (360 × 504 mm)
WEIGHT	11.2 lb (W80) · 12.4 lb (W150)
LIFETIME	50,000 hrs
WARRANTY	5-Year Limited

Ordering & Dimensions

ULLA 2

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


● In stock — all other configurations built to order.

MODEL	WATTAGE	CCT	VOLTAGE	CONTROLS	DISTRIBUTION	MOUNTING	OPTIONS	FINISH
ULLA 2	- W80 40/60/80W - W150 75/100/150W	30 3000K 40 4000K 50 5000K 3CCT (3000/4000/5000K)	U 120-277V E 120-347V H 180-480V	DV 0-10V dimming (standard)	T5 Type V	SF2 Slip fitter · 2-3/8" tenon SF3 Slip fitter · 3" tenon	N None PC Photocell sensor MS Motion sensor BT Bluetooth mesh control	BK Black BZ Bronze

Build Your Order Code — example values shown in grey


MODEL	WATTAGE	CCT	VOLTAGE	CONTROLS	DISTRIBUTION	MOUNTING	OPTIONS	FINISH
ULLA 2	W80	3CCT	U	DV	T5	SF3	N	BK

STANDARD FINISHES

BK
BlackBZ
Bronze


Dimensions & Weight

MODEL	DIAMETER	OVERALL HEIGHT	HEAD DEPTH	WEIGHT (NET)
ULLA 2 (W80 · 40-80W)	14.17" (360 mm)	19.84" (504 mm)	2.91" (74 mm)	11.2 lb
ULLA 2 (W150 · 75-150W)	14.17" (360 mm)	19.84" (504 mm)	2.91" (74 mm)	12.4 lb

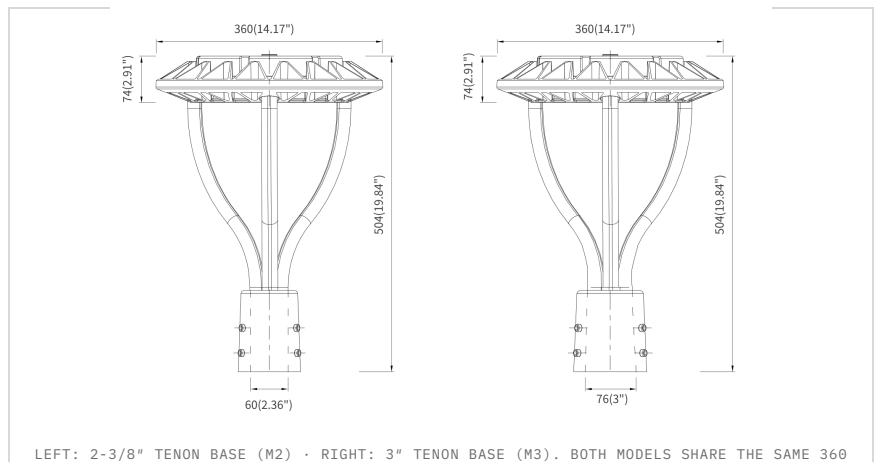


Mounting

ULLA 2

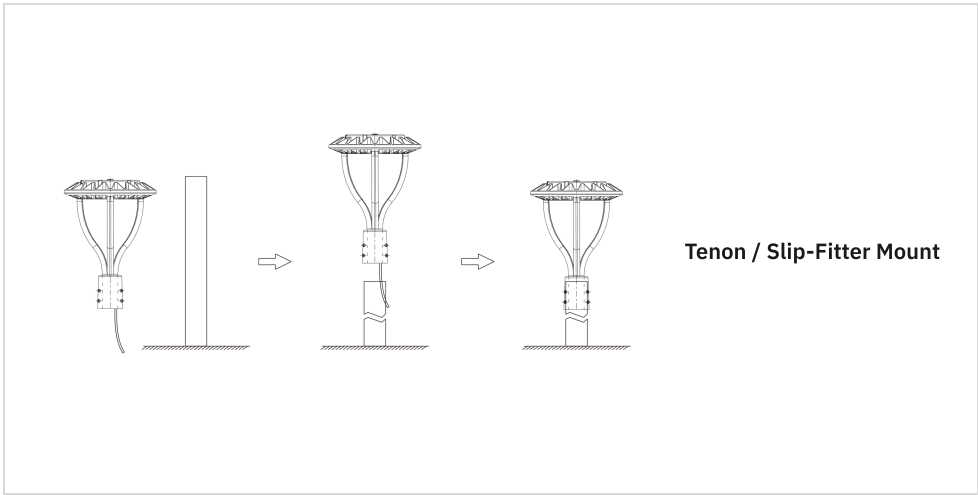

Slides over the pole tenon and locks with integral set screws — supply lead feeds down through the tenon.

Options



Photometry

OUTPUT & SUGGESTED MOUNTING HEIGHT

WATTAGE	SUGGESTED HEIGHT	DELIVERED LUMENS*
40W (W80)	7' - 10'	~5,600 lm
60W (W80)	8' - 12'	~8,400 lm
75W (W150)	10' - 14'	~10,500 lm
80W (W80)	10' - 14'	~11,200 lm
100W (W150)	12' - 18'	~14,000 lm
150W (W150)	14' - 20'	~21,000 lm

* Estimated at 140 lm/W — verify against photometric files for final layouts.

Distribution — Efficacy 130–140 lm/W IES File On request