

Damien

Hazardous-Location Exit Sign

A hazardous-location LED exit sign for Class I, II and III classified areas. Its gravity-cast housing carries a 3,000-hour salt-fog finish and seals to IP66 and NEMA 4X; the single- or double-faced glass panel lights red or green, set in the field. An integral battery keeps it lit for 180 minutes on power failure.

- Maintained or emergency-only — lit at all times, or only when mains power fails
- Tri-colour indicator: charge state, low battery, battery, circuit and light-output faults
- Wall plate included; pendant mounts take ¾" NPT conduit (½" NPT also on the stem pendant)
- Eight legend layouts — EXIT with or without chevrons, or running man with arrow



UL

cCSAus

Wet Location

IP66

WATTAGE	4W
VOLTAGE	120–347V AC universal
BATTERY	Integral emergency battery
EMERGENCY RUNTIME	180 minutes
FINISH	Gray sand or yellow · 3,000-hour salt-fog finish
OPERATING TEMP	0°C to 50°C (32°F to 122°F)

IP / IMPACT	IP66 · NEMA 4X · IK08
MATERIAL	Gravity-cast housing · glass legend panel
MOUNTING	Wall (standard) · stem pendant · pendant with box · pendant with safety wires
DIMENSIONS	16.61" W × 17.98" H × 4.25" D
LIFETIME	L70 ≥ 60,000 hours (LM-80 / TM-21 at 25°C)
WARRANTY	5-Year limited

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	FACE	WATTAGE	VOLTAGE	LETTER	LEGEND	MOUNTING	OPTIONS	FINISH
DAMIEN	1S Single Sided 2S Double Sided	4 4W	E 120-347V	2COL (Red / Green)	EX EXIT EXL < EXIT EXR EXIT > EXB < EXIT > RMR Running man → RML ← Running man RMD Running man ↓ DRM ↓ Running man	WL Wall (standard) ST Stem pendant STB Pendant with box STW Pendant with safety wires	MT Maintained EMO Emergency only	SGY Gray Sand YL Yellow

Build Your Order Code — example values shown in grey

MODEL	FACE	WATTAGE	VOLTAGE	LETTER	LEGEND	MOUNTING	OPTIONS	FINISH
DAMIEN	1S	4	E	2COL	EXB	WL	MT	SGY


DIMENSIONS

MODEL	WIDTH	HEIGHT	DEPTH
DAMIEN	16.61" (422 mm)	17.98" (456.7 mm)	4.25" (108 mm)

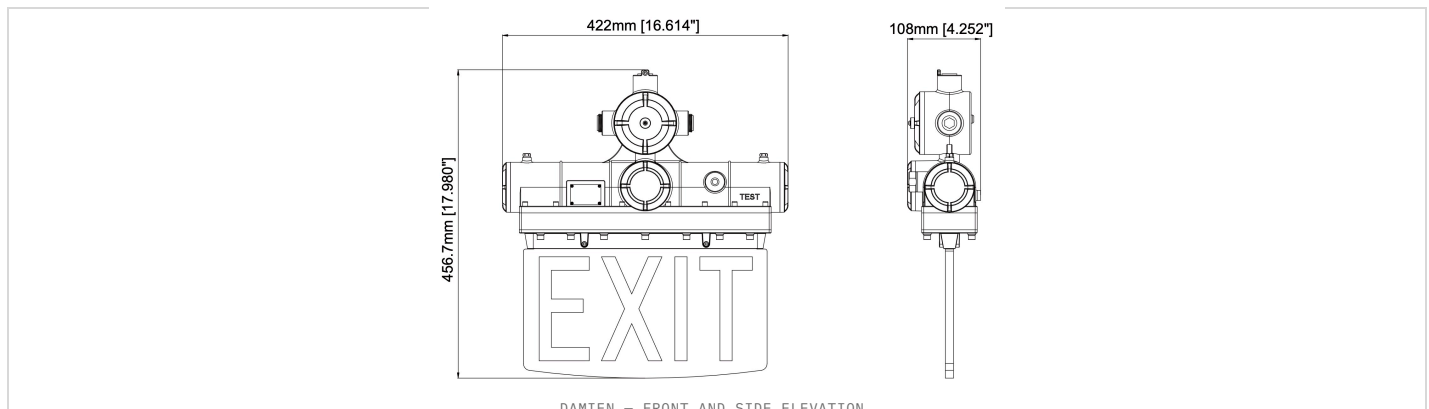


DAMIEN — FRONT AND SIDE ELEVATION.

LEGEND

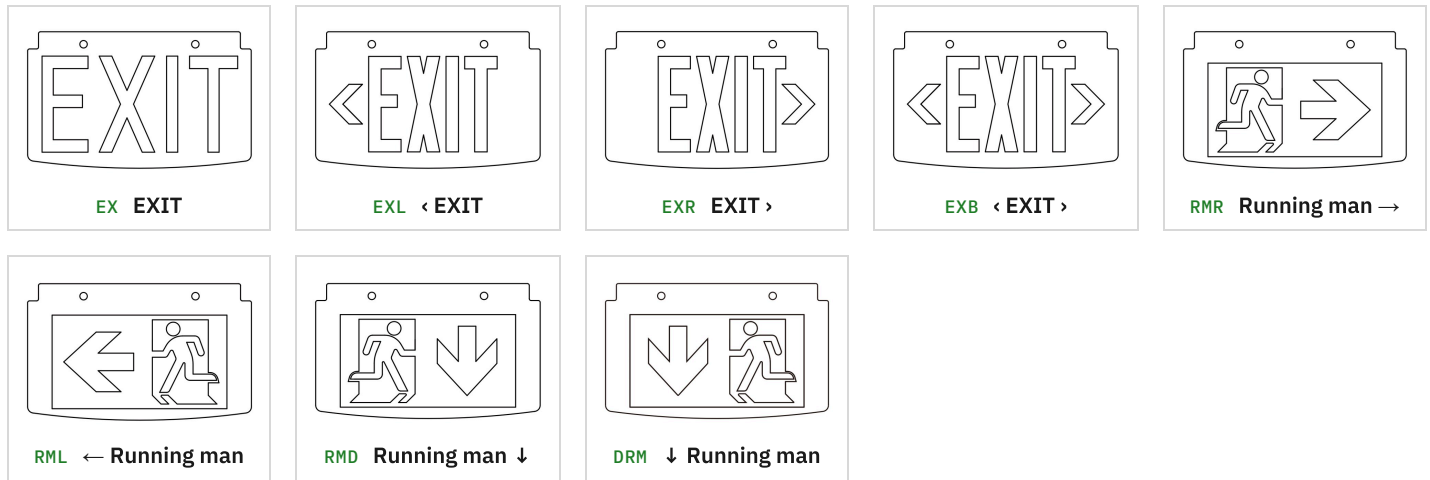

MOUNTING

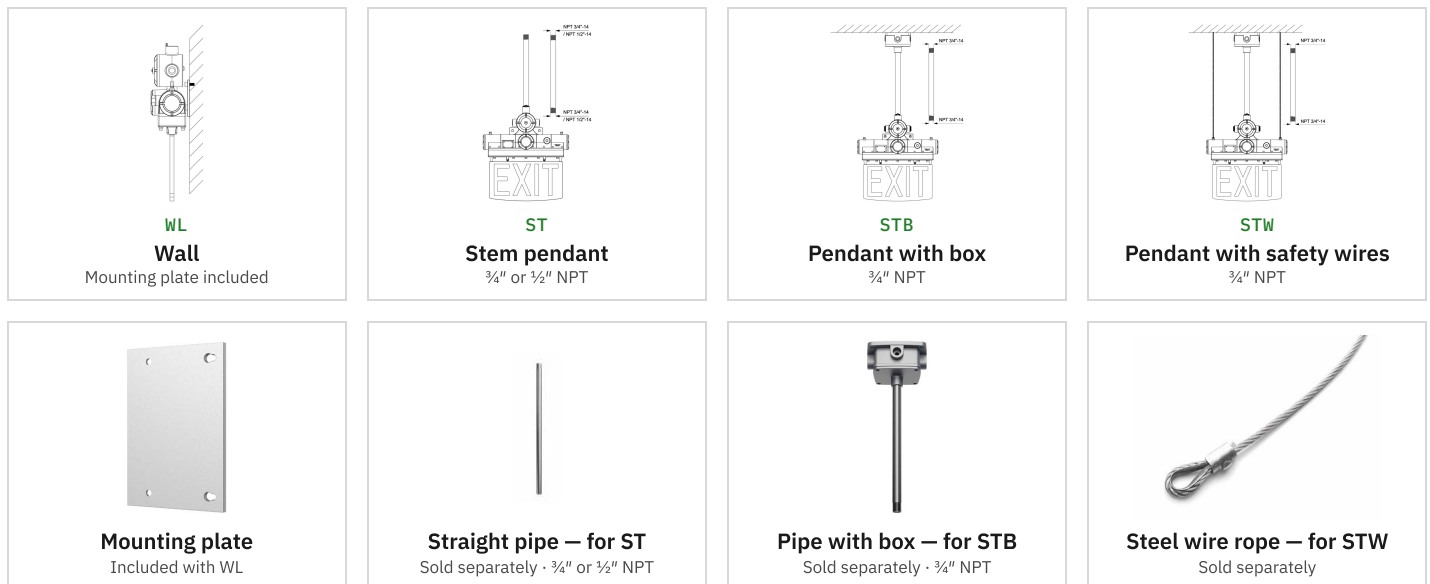

ELECTRICAL & EMERGENCY PERFORMANCE

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED SOURCE	RECHARGE	EMERGENCY RUNTIME
DAMIEN	120–347V	—	4W	—	—	180 min

Values as published by the manufacturer; — not stated. Contact CIP for custom configurations.

HAZARDOUS LOCATION RATINGS

MARKING	RATING
Class I	Division 1: Groups C, D · Division 2: Groups A, B, C, D
Class II	Division 1: Groups E, F, G · Division 2: Groups F, G
Class III	—
Temperature code	T6 (+45°)
Standards	ANSI/UL 844 · UL 1598A · ANSI/UL 924 · CSA C22.2 No. 137 · CSA C22.2 No. 141

Marked to UL 844 (North America) for electric lighting fixtures in hazardous (classified) locations.