


# INTRODUCTION

# LED FOUNTAIN LIGHT

## FEATURE

Advanced Patent LED Technology  
 Durable Corrosion Resistant Structure  
 Long Lifespan > 50,000hours  
 Working Temperature: -30°C~50°C



## MAIN MATERIAL

LED Brand: GUBO  
 Driver Brand: GUBO  
 Housing: Die-casted SUS304  
 Optics: High Efficiency PC Lens  
 Diffuser: Clear Tempered Glass Diffuser  
 Pre-wired: 0.5meters 2C0.75mm² Power Cord

## INSTALLATION

Surface Mounted  
 Maximum Diving Depth: 5meters  
 Suitable for Pool, Fountain.....

## STANDARD

Designed and Manufactured to Comply with  
 CE/RoHS/CB/cETL/SAA/SASO Standard  
 IP68 and IK10 Protection, Class III Electric

## OPTION

LED CCT: 1,800K~10,000K/R/G/B/Y  
 [CRI]: RA80, [G] RA90, [H] RA97

## NOTE

**Cannot Be Operated for Over 5min Out of Water!**




## CASE STUDY



## BACKVIEW



## DIMENSION: [UNIT: MM]

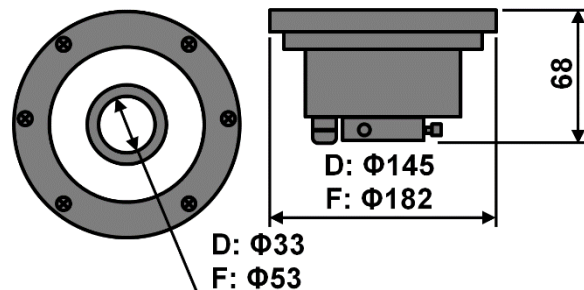

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT [V]			
GTG9201D	6W	9x2W SMD3030	G2700K	RA90	460	>0.5	[Symmetric] BL10D:10° BL15D:15° BL25D:25° BL30D:30° BL45D:45° BL60D:60° BL90D:90° BL120D:120°	[CDP]: PWM(1%)	CV DC24V [CV DC12V]			
			G3000K	RA90	500							
			G3500K	RA90	500							
			G4000K	RA90	530							
			G5000K	RA90	530							
	9W	9x2W SMD3030	G2700K	RA90	610	>0.6						
			G3000K	RA90	660							
			G3500K	RA90	660							
			G4000K	RA90	710							
			G5000K	RA90	710							
2C@9W	6TW	G2700K	G6000K	RA90	420	>0.5						
3C@9W	6RGB	620nm	520nm	465nm	/	420	>0.5					
4C@9W	6RGBW	620nm	520nm	465nm	2700K	/	420	>0.5				
4C@9W	6RGBA	620nm	520nm	465nm	590nm	/	420	>0.5				
GTG9201F	12W	18x2W SMD3030	G2700K	RA90	770	>0.6	[Oval] BLV10x45° BLV10x60° BLV20x60° BLV30x70°	[Following by Remote Driver] [CDT]: TRIAC(10%) [CDV]: 0/1~10V(8%) [CDV0]: 0~10V(1%) [CDV1]: 1~10V(10%) [CDX]: DMX512(1%) [CDA]: DALI(1%)				
			G3000K	RA90	830							
			G3500K	RA90	830							
			G4000K	RA90	890							
			G5000K	RA90	890							
			G6000K	RA90	890							
	18W	18x2W SMD3030	G2700K	RA90	840	>0.7						
			G3000K	RA90	960							
			G3500K	RA90	860							
			G4000K	RA90	1090							
			G5000K	RA90	1090							
			G6000K	RA90	1090							
			2C@18W	12TW	G2700K				G6000K	RA90	790	>0.5
			3C@18W	12RGB	620nm				520nm	465nm	/	790
4C@18W	12RGBW	620nm	520nm	465nm	2700K	/	790	>0.5				
4C@18W	12RGBA	620nm	520nm	465nm	590nm	/	790	>0.5				

## NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.  
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

## CIP Lighting

T.: 1-803-766-0243 W.: [www.ciplighting.com](http://www.ciplighting.com) E.: [info@ciplighting.com](mailto:info@ciplighting.com)