


GITTE: LED POST TOP LIGHT

INTRODUCTION



FEATURE

Modern Post Top Area Lighting
 Uniform Light Distribution
 Long Lifespan > 50,000hours
 Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
 Driver Brand: GUBO
 Housing: Die-casted Aluminum Module
 Diffuser: Prismatic PC Diffuser

INSTALLATION

Mounting Slip Fitter [MSC]
 Suitable for Road Light, like Street, Park.....

STANDARD

Designed and Manufactured to Comply with
 CE/RoHS/CB/cETL/SAA Standard
 Withstand Voltage: 3.75KV, Surge: 6KV
 IP65 Protection, Class I Electric


OPTION

LED CCT: 1,800K~10,000K/R/G/B/A
 [CRI]: [E] RA80, [G] RA90, [H] RA97
 Custom Housing Finish: Colors by RAL Code

WHITE RAL9010P	BLACK RAL9005P	GREY RAL7042P	DARK GREY RAL7016P
--------------------------	--------------------------	-------------------------	------------------------------



DIMENSION: [UNIT: MM] **[GE] POST** **CASE STUDY: (EE)** **CASE STUDY: (C)**

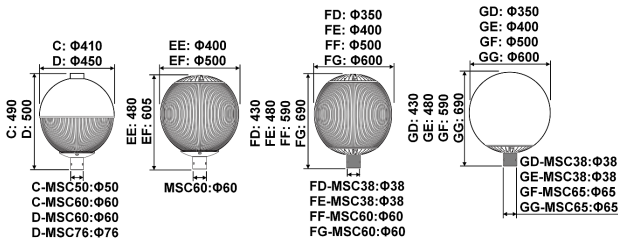

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT [V]			
GITTE-C	60W [40W] [30W]	72x2W SMD3030	G2700K	RA90	6050	>0.9	[PRISMATIC] BDP:150°					
			G3000K	RA90	6500							
			G3500K	RA90	6500							
			G4000K	RA90	6920							
			G5000K	RA90	6920							
			G6500K	RA90	6800							
	2C@60W	TWG	G2700K	G6500K	RA90	4870				>0.7		
	3C@60W	RGB	620nm	520nm	465nm	\				4870	>0.6	
	4C@60W	RGBWG	620nm	520nm	465nm	2700K				\	4870	>0.6
	4C@60W	RGBA	620nm	520nm	465nm	590nm				\	4870	>0.5
GITTE-D	80W [40W] [60W] [100W]	144x2W SMD3030	G2700K	RA90	8060	>0.9	[CLEAR] BDC: 150°	[CDT]: TRIAC(15%) [CDV]: 0/1~10V(8%) [CDV0]: 0~10V(1%) [CDV1]: 1~10V(15%) [CDX]: DMX512(1%) [CDA]: DALI(1%) [CDP]: PWM(1%)	AC100~277V [AC100~240V] [AC100~347V] [AC180~528V] 50/60Hz			
			G3000K	RA90	8650							
			G3500K	RA90	8650							
			G4000K	RA90	9230							
			G5000K	RA90	9230							
			G6500K	RA90	9070							
	2C@80W	TWG	G2700K	G6500K	RA90	6230				>0.7		
	3C@80W	RGB	620nm	520nm	465nm	\				6230	>0.6	
	4C@80W	RGBWG	620nm	520nm	465nm	2700K				\	6230	>0.6
	4C@80W	RGBA	620nm	520nm	465nm	590nm				\	6230	>0.5
GITTE-EE	40W	40x2W SMD3030	G2700K	RA90	4030	>0.9	[STRIPLE] LM-15%Less BDS:150°		[CV DC24V] [CV DC48V]			
			G3000K	RA90	4320							
			G3500K	RA90	4320							
			G4000K	RA90	4620							
			G5000K	RA90	4620							
			G6500K	RA90	4440							
	2C@40W	TWG	G2700K	G6500K	RA90	3500				>0.7		
	3C@40W	RGB	620nm	520nm	465nm	\				3500	>0.6	
	4C@40W	RGBWG	620nm	520nm	465nm	G2700K				\	3500	>0.6
	4C@40W	RGBA	620nm	520nm	465nm	590nm				\	3500	>0.5
GITTE-EF	60W [40W] [30W]	72x2W SMD3030	G2700K	RA90	6050	>0.9	[OPAL] LM-25%Less BDM: 150°					
			G3000K	RA90	6500							
			G3500K	RA90	6500							
			G4000K	RA90	6920							
			G5000K	RA90	6920							
			G6500K	RA90	6800							
	2C@60W	TWG	G2700K	G6500K	RA90	4870				>0.7		
	3C@60W	RGB	620nm	520nm	465nm	\				4870	>0.6	
	4C@60W	RGBWG	620nm	520nm	465nm	2700K				\	4870	>0.6
	4C@60W	RGBA	620nm	520nm	465nm	590nm				\	4870	>0.5
GITTE-EF	60W [40W] [30W]	72x2W SMD3030	G2700K	RA90	6050	>0.9	[FROSTED] LM-15%Less BDF: 150°					
			G3000K	RA90	6500							
			G3500K	RA90	6500							
			G4000K	RA90	6920							
			G5000K	RA90	6920							
			G6500K	RA90	6800							
	2C@60W	TWG	G2700K	G6500K	RA90	4870				>0.7		
	3C@60W	RGB	620nm	520nm	465nm	\				4870	>0.6	
	4C@60W	RGBWG	620nm	520nm	465nm	2700K				\	4870	>0.6
	4C@60W	RGBA	620nm	520nm	465nm	590nm				\	4870	>0.5

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

GITTE: LED POST TOP LIGHT

SPECIFICATION

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT [V]	
GITTE-FD GITTE-FE	30W	36x2W SMD3030	G2700K	RA90	1880	>0.9	[CLEAR] BDC: 150°		AC100~277V [AC100~240V] [AC100~347V] 50/60Hz	
			G3000K	RA90	2060					
			G3500K	RA90	2060					
			G4000K	RA90	2240					
			G5000K	RA90	2240					
			G6500K	RA90	2240					
	2C@30W	TWG	G2700K	G6500K	RA90	1600	>0.7	[STRIPLE]	[CDT]:TRIAC(15%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDP]:PWM(1%)	
	3C@30W	RGB	620nm	520nm	465nm	\	1440	>0.6		LM-15%Less
	4C@30W	RGBWG	620nm	520nm	465nm	G2700K	\	1440		>0.6
	4C@30W	RGBA	620nm	520nm	465nm	590nm	\	1440		>0.5
GITTE-FF GITTE-FG	50W	60x2W SMD3030	G2700K	RA90	3320	>0.9	[CLEAR] BDC: 150°		AC180~528V 50/60Hz	
			G3000K	RA90	3630					
			G3500K	RA90	3630					
			G4000K	RA90	3950					
			G5000K	RA90	3950					
			G6500K	RA90	3950					
	2C@50W	TWG	G2700K	G6500K	RA90	2650	>0.7	[OPAL]	[CDT]:TRIAC(15%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDP]:PWM(1%)	
	3C@50W	RGB	620nm	520nm	465nm	\	2400	>0.6		LM-25%Less
	4C@50W	RGBWG	620nm	520nm	465nm	G2700K	\	2400		>0.6
	4C@50W	RGBA	620nm	520nm	465nm	590nm	\	2400		>0.5
GITTE-GD GITTE-GE	20W	24x2W SMD3030	G2700K	RA90	2020	>0.9	[CLEAR] BDC: 150°		[CV DC24V] [CV DC48V] [CV DC48V]	
			G3000K	RA90	2160					
			G3500K	RA90	2160					
			G4000K	RA90	2310					
			G5000K	RA90	2310					
			G6500K	RA90	2250					
	2C@20W	TWG	G2700K	G6500K	RA90	1650	>0.7	[STRIPLE]	[CDT]:TRIAC(15%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDP]:PWM(1%)	
	3C@20W	RGB	620nm	520nm	465nm	\	1650	>0.6		LM-15%Less
	4C@20W	RGBWG	620nm	520nm	465nm	G2700K	\	1650		>0.6
	4C@20W	RGBA	620nm	520nm	465nm	590nm	\	1650		>0.5
GITTE-GF GITTE-GG	40W	42x2W SMD3030	G2700K	RA90	4030	>0.9	[CLEAR] BDC: 150°		AC100~277V [AC100~240V] [AC100~347V] [AC180~528V] 50/60Hz	
			G3000K	RA90	4320					
			G3500K	RA90	4320					
			G4000K	RA90	4620					
			G5000K	RA90	4620					
			G6500K	RA90	4440					
	2C@40W	TWG	G2700K	G6500K	RA90	3320	>0.7	[OPAL]	[CDT]:TRIAC(15%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDP]:PWM(1%)	
	3C@40W	RGB	620nm	520nm	465nm	\	3320	>0.6		LM-25%Less
	4C@40W	RGBWG	620nm	520nm	465nm	G2700K	\	3320		>0.6
	4C@40W	RGBA	620nm	520nm	465nm	590nm	\	3320		>0.5

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment. Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.