

SIGURD

Selectable LED Glass Wall Pack

A glass-lensed wall pack for indoor or outdoor (wet location) use — museums, galleries, shopping malls, office buildings and façades. Both power and colour temperature are set on the fixture with sliding switches, so one SKU covers four wattages and three CCTs.

- Field-selectable power — 4-position switch (100 / 80 / 60 / 40%)
- Field-selectable CCT — 3-position switch (3000K / 4000K / 5000K)
- Two power classes: 28–70W or 48–120W · up to 16,767 lm
- Lumileds 2835 LEDs · up to 171 lm/W · 1–10V continuous dimming
- Ships preset at the highest wattage and 4000K
- Die-cast aluminium · wet location · PF >0.95



UL

RoHS


Wet Location

LUMEN OUTPUT	Up to 16,767 lm
EFFICACY	Up to 171 lm/W
COLOR TEMP / CCT	3000K / 4000K / 5000K (field-selectable)
CRI	>70 (Ra)
DISTRIBUTION	96.2° × 110.5° (28–70W) · 99.5° × 105.4° (48–120W)
LED SOURCE	Lumileds 2835
WATTAGE	28 / 42 / 56 / 70W or 48 / 72 / 96 / 120W (field-selectable)
VOLTAGE	AC 120–277V
POWER FACTOR	>0.95

DIMMING	1–10V continuous
DRIVER	High-efficiency · >89% driver efficiency
FINISH	Dark Bronze, White, Black, Silver
IP / IMPACT	Wet Location
MATERIAL	Die-cast aluminum · PC lens
DIMENSIONS	14.2" W × 9.27" H × 7.22" D
WEIGHT	10.2 lbs
LIFETIME	>50,000 hrs
WARRANTY	5-Year Limited

FIELD SELECTION

Power and CCT are set on the fixture with sliding switches.



**WATT/CCT
Selector Switch**
4-position power · 3-position CCT

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	OPTIONS	FINISH
SIGURD	70 28/42/56/70W 120 48/72/96/120W	U 120-277V	3CCT 3000/4000/ 5000K	DV 1-10V Dimming	N None PC Photocell	DBZ Dark Bronze WH White BK Black SM Silver


Build Your Order Code — example values shown in grey

MODEL	WATTAGE	VOLTAGE	CCT	CONTROLS	OPTIONS	FINISH
SIGURD	120	U	3CCT	DV	N	DBZ


STANDARD FINISHES



DBZ
Dark Bronze



WH
White




BK
Black



SM
Silver

DIMENSIONS & WEIGHT

MEASUREMENT	VALUE
Width (overall)	14.2" (360.8 mm)
Front face width	13.07" (332 mm)
Height	9.27" (235.5 mm)
Depth	7.22" (183.3 mm)
Net weight	10.2 lbs (4.6 kg)

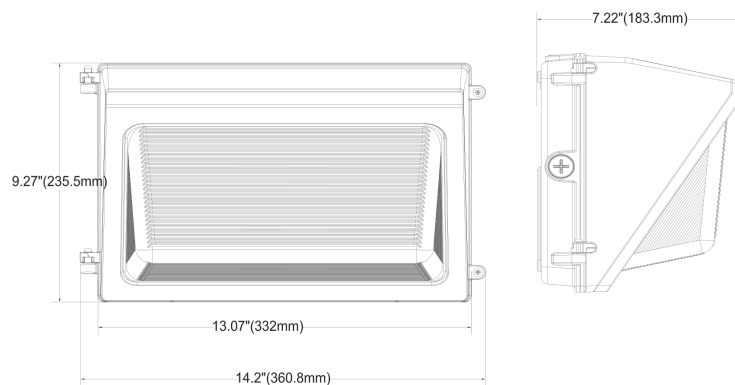

OPTIONS


CONTROLS

DV 1–10V continuous dimming
— standard on all models


OPTIONS

PC Photocell


PHOTOMETRY




70 class · 28W · 4000K




70 class · 42W · 4000K




70 class · 56W · 4000K




70 class · 70W · 4000K




120 class · 48W · 4000K



120 class · 72W · 4000K



120 class · 96W · 4000K



120 class · 120W · 4000K

DELIVERED LUMENS — 70 (28–70W)

Beam	CCT	28W	42W	56W	70W
96.2° × 110.5°	4000K	4,800	6,393	7,880	9,808

Switch positions 40 / 60 / 80 / 100%. Ships preset at 70W, 4000K.

DELIVERED LUMENS — 120 (48–120W)

Beam	CCT	48W	72W	96W	120W
99.5° × 105.4°	4000K	6,990	10,447	13,422	16,767

Switch positions 40 / 60 / 80 / 100%. Ships preset at 120W, 4000K.

DISTRIBUTION 96.2° × 110.5° (28–70W) · 99.5° × 105.4° (48–120W) **EFFICACY** Up to 171 lm/W **IES FILE** Available on request