

GTE6603A: LED PROJECTOR LIGHT

INTRODUCTION



FEATURE

Optimized Professional Architecture Lighting
 Superior Durable Outdoor Lighting
 Modular Structure For Various Installation Location
 Long Lifespan Design >50,000hours
 Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
 Driver Brand: GUBO
 Housing: Die-casted Aluminum Radiator
 Optics: High Efficiency PC Lens
 Diffuser: Clear Tempered Glass Diffuser

INSTALLATION

Stake Mount or Surface Mounted
 Suitable for Exterior Illumination, Like Architecture.....

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA/SASO Standard
 IP67 Protection, Class III Electric

OPTIONS

LED CCT: 1,800K~10,000K/R/G/B/Y
 LED Grown Light: **Full Spectrum** 380nm~840nm
 [CRI]: [E] Ra80, [G] Ra90, [H] Ra97

[FBS]: Ground Spike
 [NEST]: Rattan Nest
 [CCB-FM]: Female and Male waterproof Connector
 [F1] Custom Housing Finish: Colors by RAL Code

WHITE	BLACK	GREY	DARK GREY	BRASS
RAL9010P	RAL9005P	RAL7042P	RAL7016P	RAL1024P




(MC320B-FFG)



(MC460B-FFG)



DIMENSION: [UNIT: MM]

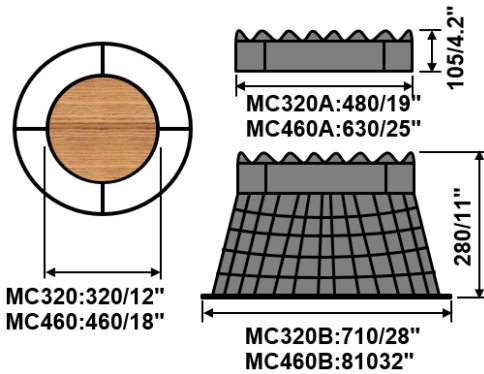

[BGL]



CASE STUDY



MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	REMOTE DRIVER	INPUT [V]					
GTE6603A- MC320A- MC320B- FFG FBS	4x18W [4x12W]	4x18x2W SMD3030	G2700K	RA90	4x1160	>0.9	[Symmetric] BL15D:15° BL25D:25° BL30D:30° BL45D:45° BL60D:60° BL90D:90° BL120D:120°	[CDT]: TRIAC(10%) [CDV]: 0~1~10V(8%) [CDV0]: 0~10V(1%) [CDV1]: 1~10V(10%) [CDX]: DMX512(1%) [CDA]: DALI(1%) [CDP]: PWM(1%)	DC24V [DC12V] [DC48V]					
			G3000K	RA90	4x1210									
			G3500K	RA90	4x1210									
			G4000K	RA90	4x1280									
			G5000K	RA90	4x1280									
			G6500K	RA90	4x1280									
GTE6603A- MC460A- MC460B- FFG FBS	5x24W [5x18W] [5x12W]	5x24x2W SMD3030	G2700K	G6500K	RA90	4x880	>0.9	[Oval] BLV10x45° BLV10x65° BLV30x70° [BDF] BDF:120° [Louver] LM-20%						
			G3000K	RA90	5x1610	>0.9								
			G3500K	RA90	5x1610	>0.9								
			G4000K	RA90	5x1710	>0.9								
			G5000K	RA90	5x1710	>0.9								
			G6500K	RA90	5x1710	>0.9								
			5x2C@24W	TWG	G2700K	G6500K	RA90				1180	>0.9		
			5x3C@24W	RGB	620nm	520nm	460nm				\	1180	>0.7	
			5x4C@24W	RGBW	620nm	520nm	460nm				G2700	\	1180	>0.5
			5x4C@24W	RGBA	620nm	520nm	460nm				590nm	\	1180	>0.5

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.