
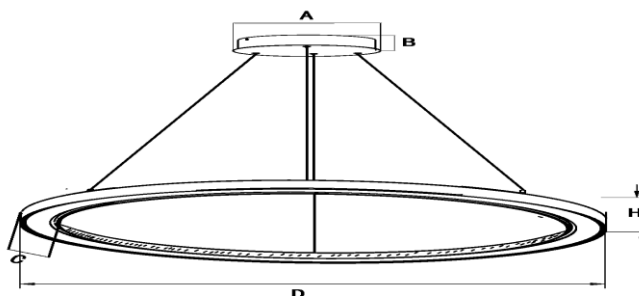


Series	LED INNER RING LIGHT SERIES	Model	INNER RING
		Project:	
		Type:	
		Notes:	
		Overview	
		<p>The inner ring light has a unique ring style light with an LED light source illuminating its inner surface. It is available in sizes ranging from 23.6".(dia.) up to 59".(dia.). The aluminum body constructions comes with 2 standard finish options: white and black. The acoustic System brings perfect integration of lighting and acoustic control. maximizes surface area to absorb sound waves and improve harmony in the installed space.</p>	








































Model No	DIMENSION					DIMENSION CODE
	D	H	C	A	B	
Inner Ring-S-32W	23.6" (600mm)	1.3" (32mm)	1.4" (35mm)	10" (250mm)	1.38" (35mm)	S
Inner Ring-S-40W	35.4" (900mm)	1.3" (32mm)	1.4" (35mm)	10" (250mm)	1.38" (35mm)	M
Inner Ring-S-70W	47.2" (1200mm)	1.3" (32mm)	1.4" (35mm)	10" (250mm)	1.38" (35mm)	L
Inner Ring-S-80W	59.1" (1500mm)	1.3" (32mm)	1.4" (35mm)	10" (250mm)	1.38" (35mm)	XL



Features:

1. Available in standard light, acoustic w/light.
2. 2 standard color finishes (black, white), other colors can be customized.
3. 35 acoustic felt colors
4. Operation Voltage: AC120-277V, 0-10v dimming and non-dimmable for optional
5. Inner emitting.
6. Efficiency: >70lm/w

Ordering Format	Model No.	Installation		Acoustic Configuration	Power	CRI	CCT		Control		Body Color		Size
	INNER RING	S	suspended	Blank no acoustic	32W	80+	30K	3000K	STD	non-dimming	SW	matt white	S
		M	surface mounted	AC Acoustic	40W	90+	40K	4000K	DIM	0-10V dimming	SB	matt black	M
					70W		50K	5000K			RAL	customized color	L
					80W								XL

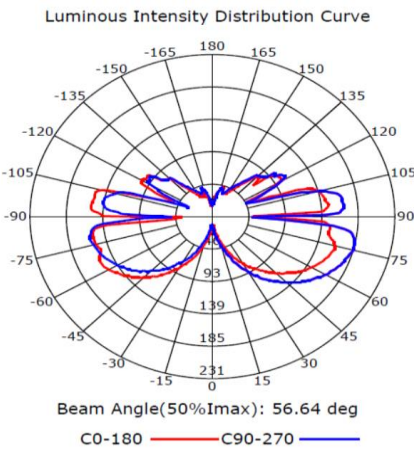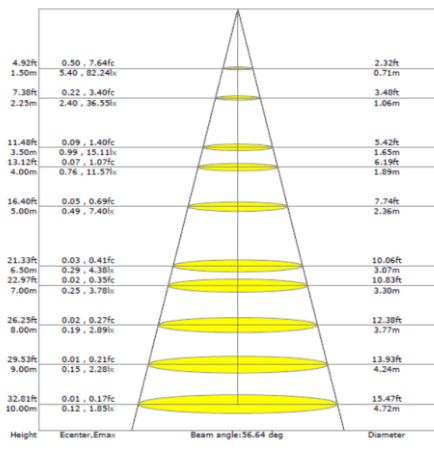Acoustic Color								
								
								
								
								
Order Example:	INNER RING-S-AC-32W-80-30K-DIM--SB-S							
Certificate	UL1598 / UL8750 / LM80 / EN62471							
Light distribution				Optical system				
								
Accessories				Continuous run				
				N/A				
Material				LED system				
LED Driver	ARCATA or Equivalent, AC120-277V,PF>0.9,no flicker,UL Cert,Class P			LED	Samsung 2835,3V,150mA			
Alu PCB	2.0W.M/K,UL Cert			CCT	2700K,3000K, 3500K, 4000K and 5000K with a great color consistency (within 3–step MacAdam ellipse)			
Housing	Alumium6063, painting.			Led life	Minimum 50,000h with 70% of lumen maintenance in 25C ambient temperature, in compliance with IES LM-80 testing measurements.			
Lens	PC, UL-94VO,Anti-UV			Operation temp	minus 20C to 40C (centigrade)			
Other								
We reserve the right to make any design changes for continuous improvement, contact us for the latest technical information!				File name				