



LED UNDERWATER LIGHT

INTRODUCTION



HOUSING WITH BLUE RUBBER RING

SIDEVIEW (A-RBL) (A-RBL) BL120D (B-RBL) (B-RBL) BL120D

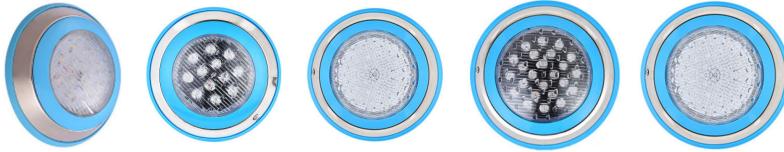


HOUSING WITH WHITE RUBBER RING

SIDEVIEW (A-RWT) (A-RWT) BL120D (B-RWT) (B-RWT) BL120D



DIMENSION: [UNIT: MM]

BACKVIEW

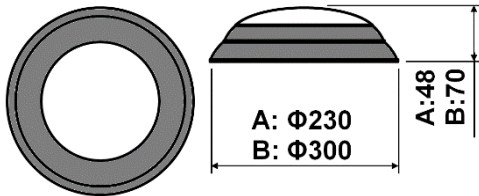

FEATURE

- Advanced Patent LED Technology
- Durable Corrosion Resistant Structure
- Anti-glare Design Matched with Lens
- Long Lifespan > 50,000hours

MAIN MATERIAL

- LED Brand: GUBO
- Driver Brand: GUBO
- Housing: Die-casted SUS304
- Optics: High Efficiency PC Lens
- Diffuser: Clear Stripe PC Diffuser
- Pre-wired: 0.5meters 2C0.75mm² Power Cord

INSTALLATION

- Surface Mounted
- Maximum Diving Depth: 5meters
- Suitable for Pool, Fountain.....

STANDARD

- Designed and Manufactured to Comply with CE/RoHS/cUL/FCC/SAA/C-tick
- IP68 and IK10 Protection, Class III Electric


OPTIONS

- LED CCT: 1,800K~10,000K/R/G/B/Y
- [CRI]: RA80, [G] RA90, [H] RA97

NOTES

Cannot Be Operated for Over 5min Out of Water!

CASE STUDY

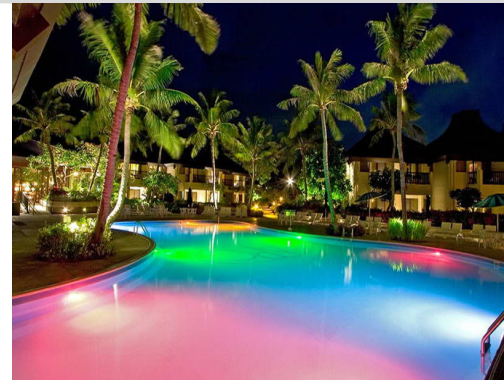

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT [V]				
GTG9501A-RWT GTG9501A-RBL	6W	24x2W SMD3030	G2700K	RA90	460	> 0.4	[Symmetric] BL10D:10° BL15D:15° BL25D:25° BL30D:30° BL45D:45° BL60D:60° BL90D:90° BL120D:120°	[CDP]: PWM(1%)	CV DC24V [CV DC12V]				
			G3000K	RA90	500								
			G3500K	RA90	500								
			G4000K	RA90	530								
			G5000K	RA90	530								
	12W	24x2W SMD3030	G2700K	RA90	770	> 0.5							
			G3000K	RA90	830								
			G3500K	RA90	830								
			G4000K	RA90	890								
			G5000K	RA90	890								
2C@12W	12TW	G2700K	G6000K	RA90	520	> 0.5							
3C@12W	12RGB	620nm	520nm	465nm	/	520	> 0.5						
4C@12W	12RGBW	620nm	520nm	465nm	2700K	/	520	> 0.5					
4C@12W	12RGBA	620nm	520nm	465nm	590nm	/	520	> 0.5					
GTG9501B-RWT GTG9501B-RBL	18W	36x2W SMD3030	G2700K	RA90	840	> 0.5	[Oval] BLV10x45° BLV10x60° BLV20x60° BLV30x70°	[Following by Remote Driver] [CDT]: TRIAC(10%) [CDV]: 0/1~10V(8%) [CDV0]: 0~10V(1%) [CDV1]: 1~10V(10%) [CDX]: DMX512(1%) [CDA]: DALI(1%)					
			G3000K	RA90	960								
			G3500K	RA90	860								
			G4000K	RA90	1090								
			G5000K	RA90	1090								
			G6000K	RA90	1090								
	24W	36x2W SMD3030	G2700K	RA90	1200	> 0.6							
			G3000K	RA90	1370								
			G3500K	RA90	1370								
			G4000K	RA90	1560								
			G5000K	RA90	1560								
			G6000K	RA90	1560								
			2C@24W	24TW	G2700K					G6000K	RA90	1560	> 0.5
			3C@24W	24RGB	620nm					520nm	465nm	/	1040
4C@24W	24RGBW	620nm	520nm	465nm	2700K	/	1040	> 0.5					
4C@24W	24RGBA	620nm	520nm	465nm	590nm	/	1040	> 0.5					

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment. Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.