





CCT Switch



ST0403-UDN-XX
ST0403-5CCT

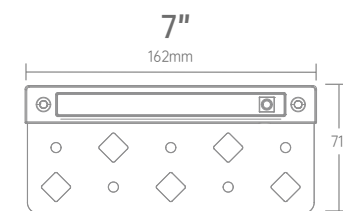

ST0703-UDN-XX
ST0703-5CCT

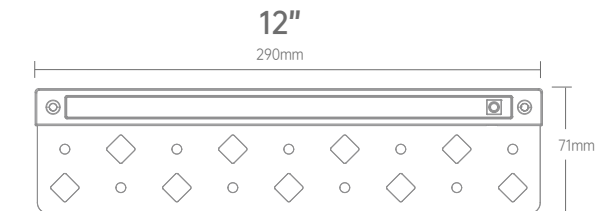

ST1203-UDN-XX
ST1203-5CCT

KEY FEATURES

- * Rated as IP65, protected from contact with harmful dust and is suitable for wet areas.
- * Durable powder coated die-cast aluminum housing.
- * Widely use in barbecue fire pits, landscape steps, retaining walls, decks, flowerbeds, and masonry walls.
- * Single color / 5CCT for option.






SPECIFICATION


Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
CIP-ST0403-UDN-XX	AC/DC12-24V	1.5W	135LM	3000K/5000K	80+	110°	90X71X17MM
CIP-ST0703-UDN-XX	AC/DC12-24V	3W	270LM	3000K/5000K	80+	110°	162X71X17MM
CIP-ST1203-UDN-XX	AC/DC12-24V	5W	450LM	3000K/5000K	80+	110°	290X71X17MM
CIP-ST0403-5CCT	AC/DC12-24V	1.5W	120LM	5CCT Tunable	80+	110°	90X71X17MM
CIP-ST0703-5CCT	AC/DC12-24V	3W	270LM	5CCT Tunable	80+	110°	162X71X17MM
CIP-ST1203-5CCT	AC/DC12-24V	5W	450LM	5CCT Tunable	80+	110°	290X71X17MM

KEY FEATURES


- * With energy-saving LED chips, it has more even and comfortable light distribution.
- * Single CCT/5CCT/RGBW version available.
- * Aluminum housing and stainless steel plate protect against corrosion and rust, providing a maintenance free exterior lighting solution.
- * Rotated 180° up and down for more convenient lighting that fits more applications.

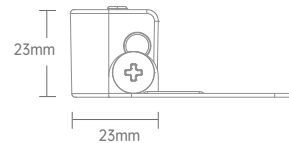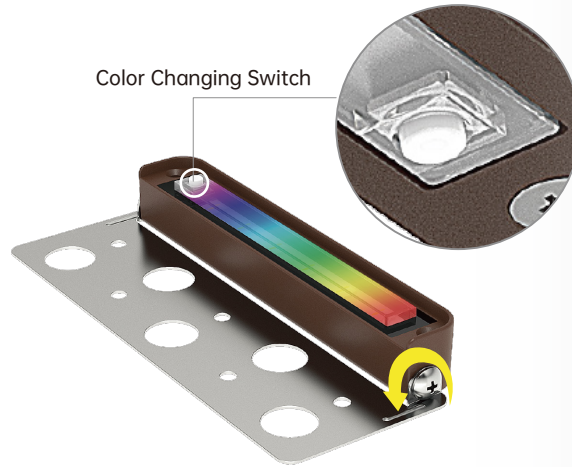

ST04-RGBCW
ST04-5CCT

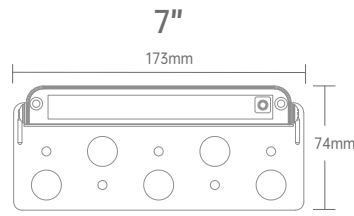



ST07-RGBCW
ST07-5CCT

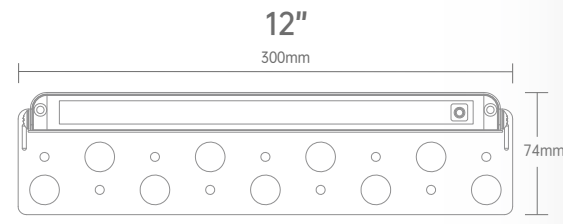

ST12-RGBCW
ST12-5CCT


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
CIP-ST04-RGBCW	AC/DC12-24V	2W	80LM	RGB+C+W	80+	95°	101X74X23MM
CIP-ST07-RGBCW	AC/DC12-24V	3W	100LM	RGB+C+W	80+	95°	173X74X23MM
CIP-ST12-RGBCW	AC/DC12-24V	5W	160LM	RGB+C+W	80+	95°	300X74X25MM
CIP-ST04-5CCT	AC/DC12-24V	2W	160LM	5CCT Tunable	80+	95°	101X74X23MM
CIP-ST07-5CCT	AC/DC12-24V	4.5W	360LM	5CCT Tunable	80+	95°	173X74X23MM
CIP-ST12-5CCT	AC/DC12-24V	7W	560LM	5CCT Tunable	80+	95°	300X74X23MM

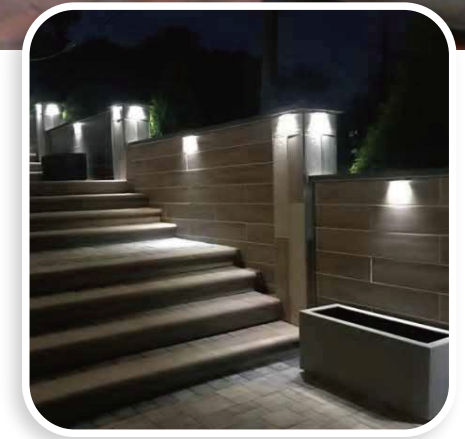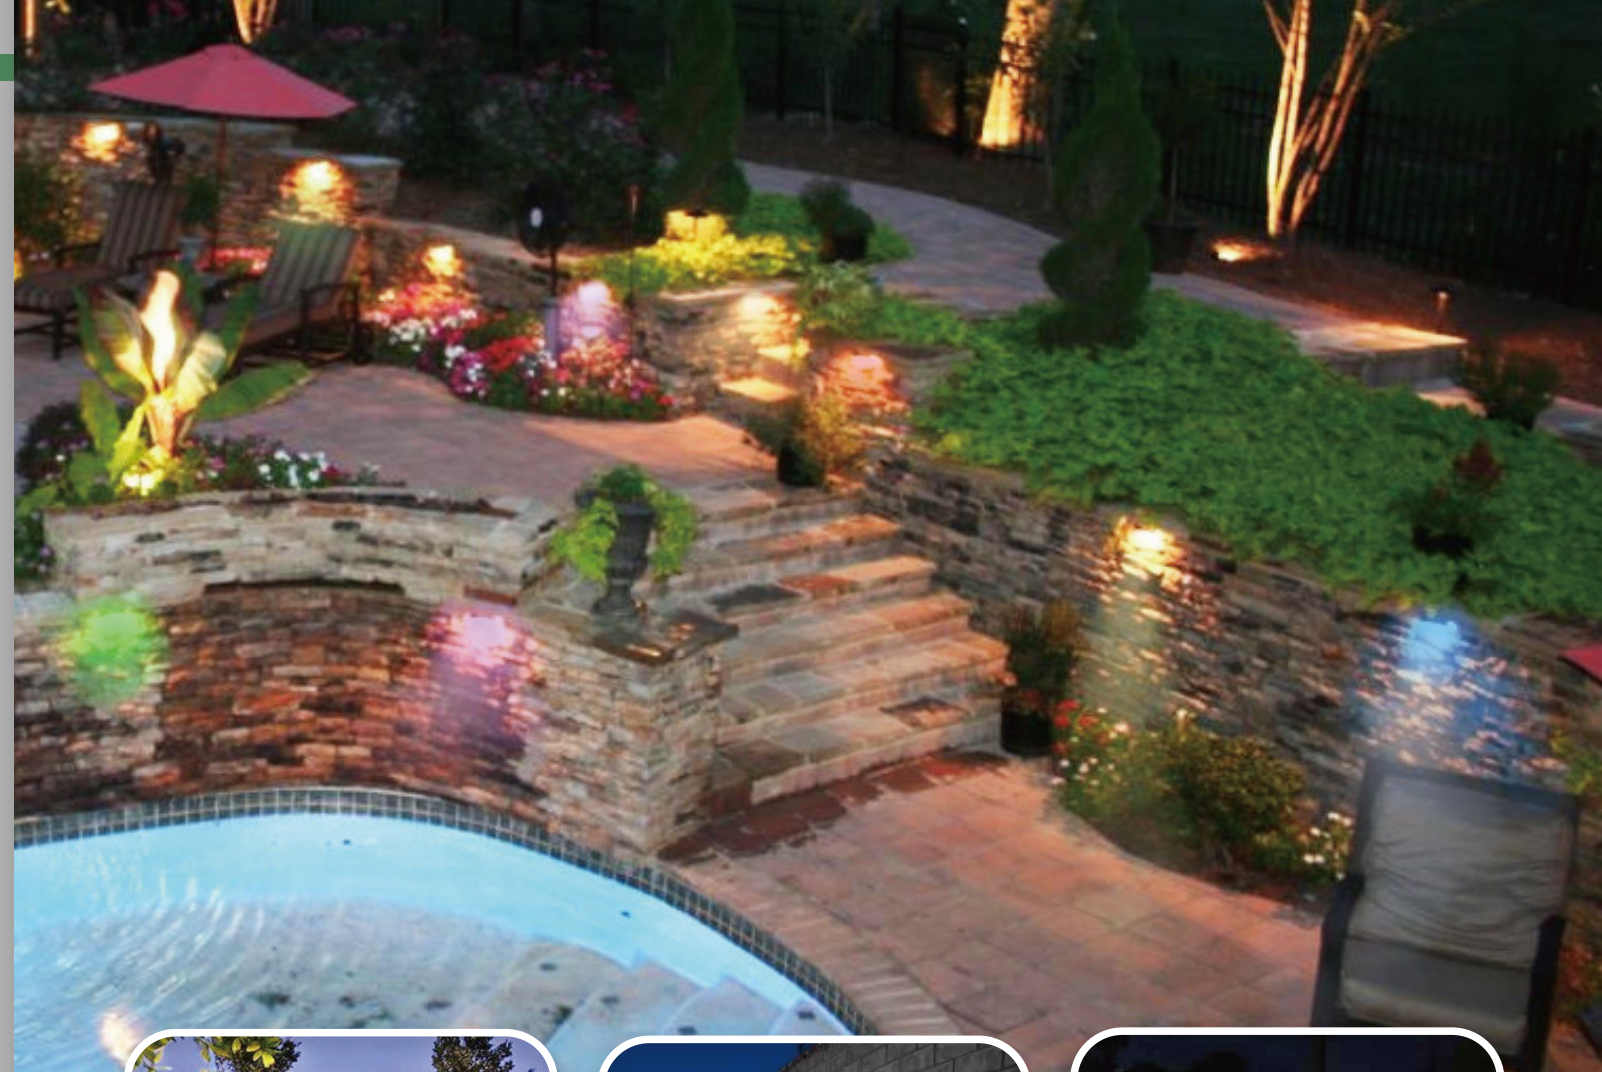

KEY FEATURES

- * With energy-saving LED chips, it has more even and comfortable light distribution.
- * Aluminum housing and stainless steel plate protect against corrosion and rust, providing a maintenance free exterior lighting solution.
- * Rotated 180° up and down for more convenient lighting that fits more applications.
- * RF remote control: Brightness, color temperature adjustable, RGB+CCT mode.

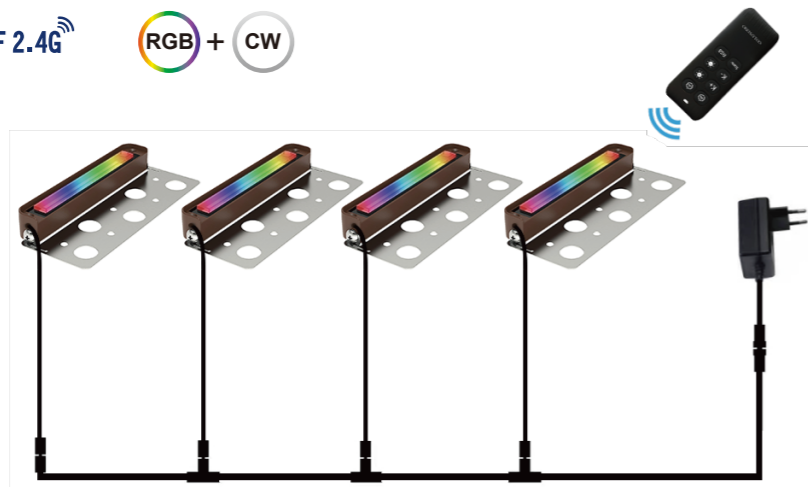


ST07-24G



SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
CIP-ST07-24G	AC/DC12-24V	5W	100LM	RGBCW	80	95°	173X74X23MM
CIP-ST012-24G	AC/DC12-24V	7W	160LM	RGBCW	80	95°	300X74X23MM

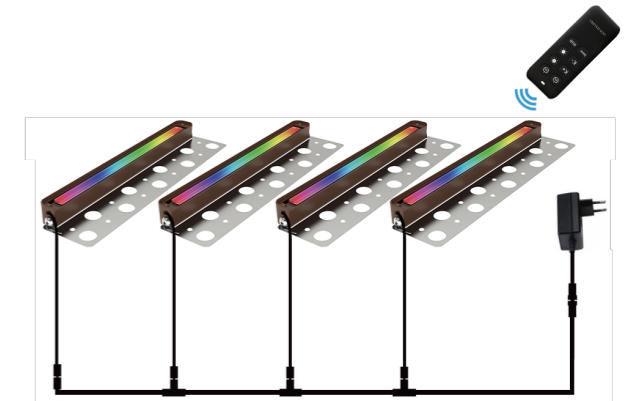

ST012-24G

