


RENATO

Wet-Location Emergency / Exit Combo

A wet-location combination exit sign and emergency light with red lettering and two adjustable LED heads. An integrated nickel-metal-hydride battery provides 90 minutes of emergency operation. Features an injection-molded thermoplastic housing with universal J-box mounting.

- 6 in. letter height with a 3/4 in. stroke, single sided
- Super-bright red LED letters — 10 LEDs per unit
- Two adjustable LED emergency heads
- 120 / 277VAC dual voltage operation at 2.9W
- Integral 3.6V 1200mAh nickel-metal-hydride battery, 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Universal J-box mounting · wet location rated



LETTER HEIGHT	6" · 3/4" stroke, single sided
LED SOURCE	10 × LED — red letters · 2 emergency heads
WATTAGE	2.9W
VOLTAGE	120 / 277V AC dual voltage
BATTERY	3.6V 1200mAh nickel-metal-hydride, integral
EMERGENCY RUNTIME	90 minutes

RECHARGE TIME	24 hours maximum
FINISH	White
MATERIAL	Injection-molded thermoplastic ABS housing · UL 94V-0 flame rating
MOUNTING	Universal J-box mounting
DIMENSIONS	12.50" W × 13.30" H overall
WARRANTY	5-Year electrical parts & housing

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	FACE	LETTER
RENATO	1S Single Sided	R Red Letters

Build Your Order Code — example values shown in grey

MODEL	FACE	LETTER
RENATO	1S	R

DIMENSIONS

MODEL	WIDTH	HEIGHT	DEPTH	LETTER HEIGHT
RENATO	12.50" (318 mm)	13.30" (338 mm)	—	6.00" (152 mm)

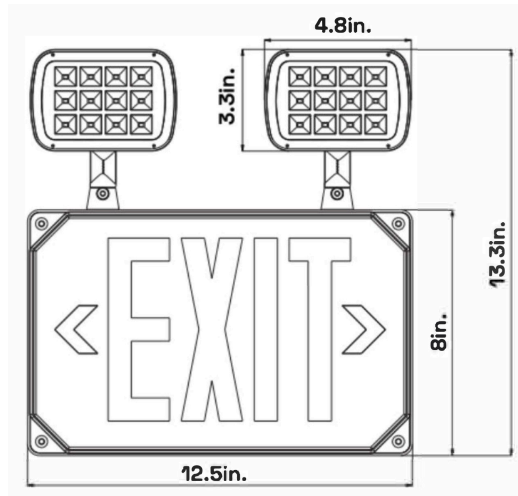

RENATO WET-LOCATION EMERGENCY / EXIT COMBO — FRONT ELEVATION. SIGN BODY 12.50" × 8.00"; EACH HEAD 4.80" × 3.30".

ELECTRICAL & EMERGENCY PERFORMANCE

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED SOURCE	RECHARGE	EMERGENCY RUNTIME
RENATO	120 / 277V	0.026 – 0.015A	2.9W	10 × Red LED + 2 heads	24 hrs	90 min

Values as published by the manufacturer. Contact CIP for custom configurations.